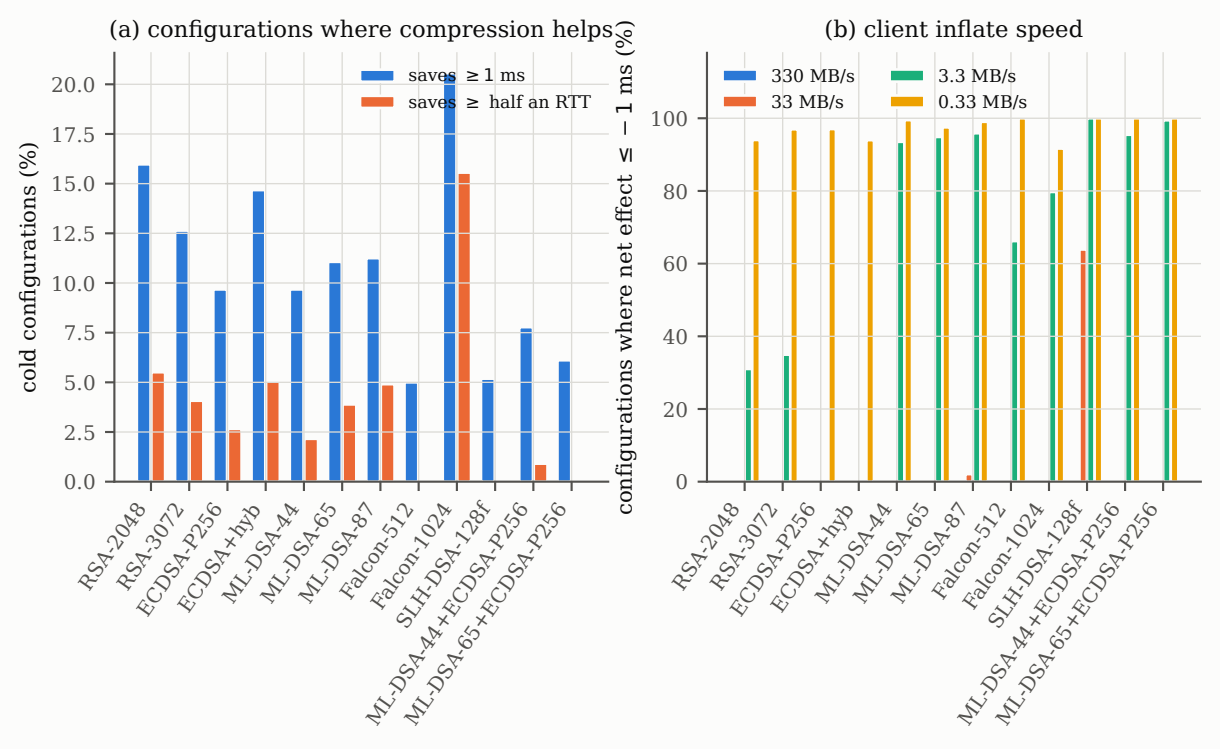
(a) configurations where compression helps
cold configurations (%)
saves ≥ 1 ms
saves ≥ half an RTT
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
RSA-2048
RSA-3072
ECDSA-P256
ECDSA+hyb
ML-DSA-44
ML-DSA-65
ML-DSA-87
Falcon-512
Falcon-1024
SLH-DSA-128f
ML-DSA-44+ECDSA-P256
ML-DSA-65+ECDSA-P256
(b) client inflate speed
configurations where net effect ≤ −1 ms (%)
330 MB/s
33 MB/s
3.3 MB/s
0.33 MB/s
0
20
40
60
80
100
RSA-2048
RSA-3072
ECDSA-P256
ECDSA+hyb
ML-DSA-44
ML-DSA-65
ML-DSA-87
Falcon-512
Falcon-1024
SLH-DSA-128f
ML-DSA-44+ECDSA-P256
ML-DSA-65+ECDSA-P256