

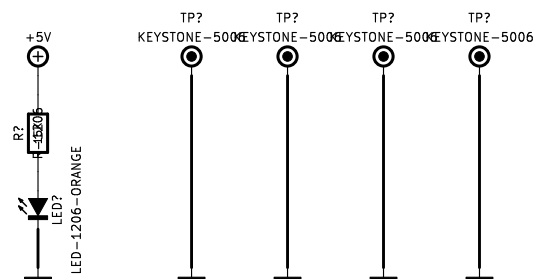


	1	2	3	4	5	6
A						
B						
			<div>Power</div> <div></div> <div>File: power.kicad_sch</div>	<div>Driver</div> <div></div> <div>File: driver.kicad_sch</div>		
C	<div>DRAFT</div>					
				<div>Encoder</div> <div></div> <div>File: encoder.kicad_sch</div>		
D						
					<div>⊗ ⊗ ⊗ ⊗ ⊗ ⊗</div>	
					<div>https://www.tronix.io/</div>	
					<div>TCAR Motor Board – L298P</div>	
					<div>Diagram</div>	
	<div>https://creativecommons.org/licenses/by-sa/4.0/</div>				<div>Sheet:1/4</div>	<div>01/2022</div>
	1	2	3	4	5	6

The schematic diagram illustrates the VBAT pin connection. The VBAT pin is connected to a network of components. On the left, there are two capacitors labeled BT7A and BT7B, both connected to ground. A resistor labeled DMP2305U is connected between the VBAT pin and ground. A switch labeled S? is connected between the VBAT pin and ground. A resistor labeled R? is connected between the VBAT pin and ground. A second resistor labeled DMP2305U is connected between the VBAT pin and the VIN pin. The VIN pin is connected to ground. The ground symbol is represented by a horizontal line with a vertical line through it.


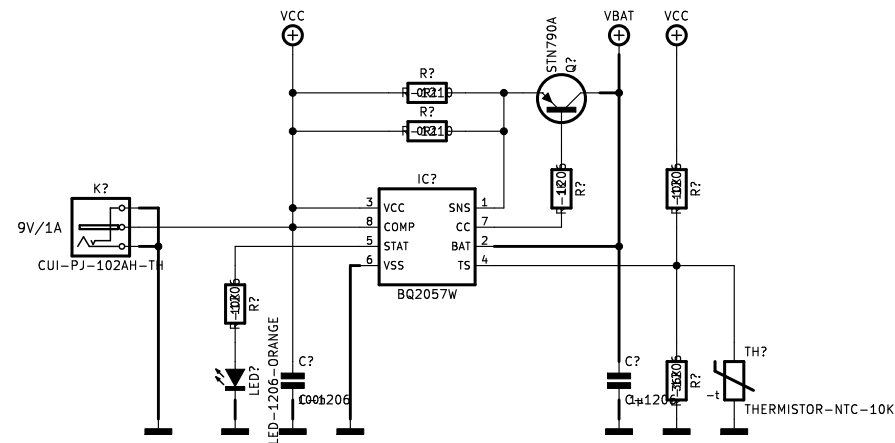


DRAFT



https://www.tronix.io/			
TCAR Motor Board – L298P			
Power			
Sheet:2/4	01/2022	Rev.A	

DRAFT

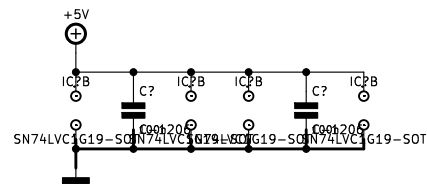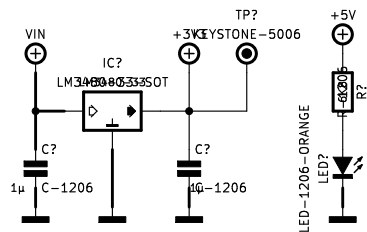

https://www.tronix.io/		
TCAR Motor Board – L298P		
Motor Encoder		
https://creativecommons.org/licenses/by-sa/4.0/	Sheet:4/4	01/2022 Rev.A