

# MULTI BAG FILTER HOUSING

The multi bag filter housings are designed to meet high flow rates while maintaining the practicality and low economic impact of the filter bags.

Our range of mult sbag filters unlike other similar products on the market, ensures complete separation between the dirt chamber and the clean chamber, as the bag collar seat is made on a flange obtained by mechanical machining.

Our multi bag filters are manufactured in accordance with our high quality standards and in accordance with PED Directive 97/23 / EC and the most common international standards.

Multibag filters are available in both standard and special versions to ensure suitability for the application.



CHEMICAL &  
PETROLCHEMICAL



FOOD & PHARMA



INDUSTRIAL



OIL & GAS



WATER  
TREATMENT



ENERGY



## Applications

### Chemical & Petrolchemical

- Process Fluids • Solvent

### Food & Pharma

- Cosmetic • Prefiltration • Beverage and Water • Chocolate • Dairy • Pre-Prefiltration

### Industrial

- Paints & inks production • Cataphoresis • Mechanic Industry • Paper Mills • Textile Industry

### Oil & Gas

- Refinery process fluids




### Water Treatment

- Prefiltration • Softening system protection • Water filtration

### Energy

- Process Fluids • Gas separations & treatment • Water treatment

Fetures

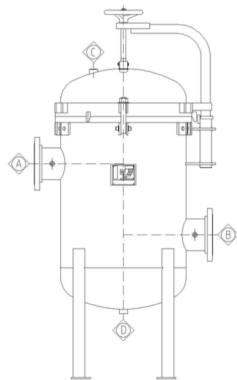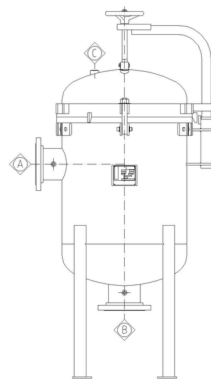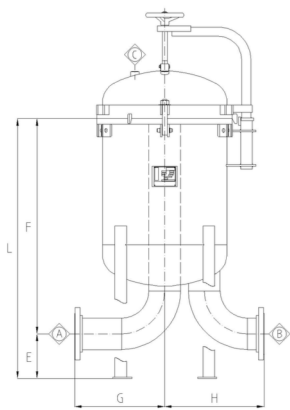

Multiple bag Filter Series			Max Operating Pressure	Dimensions					Connections		Volume Liters	Weight kg	Out / Put Liters / h
Model	N° Bags	Type Bags		E	F	L	G	H	A-B	C			
GPSM	4	1	10bar @60° C	250	700	950	400	450	4"	1/2	120	150	80.000
	4	2		250	1040	1290	400	450	4"	1/2	200	165	120.000
	5	2		250	1365	1290	400	450	5"	1/2	250	205	150.000