

Evolution of Classical NACA Airfoil Families

A Parametric Modeling Approach Using an Interactive Spreadsheet Framework

Nghia T. Tran

Abstract

This study examines the evolution of classical NACA airfoil families, highlighting the transition from simple analytical parameterizations to aerodynamically informed design methodologies. A parametric modeling framework is developed to reconstruct NACA airfoil geometries from their defining parameters within an interactive spreadsheet-based environment, enabling real-time visualization and systematic variation of design inputs. The generated airfoil coordinates can be exported in normalized or scaled form for integration into CAD systems and aerodynamic analysis tools. Aerodynamic performance is subsequently evaluated through lift and drag characteristics, enabling comparison of efficiency across different airfoil series. The results illustrate how geometric refinements influence aerodynamic behavior, particularly in terms of lift-to-drag ratio and sensitivity to operating conditions. By linking theoretical formulations with computational implementation and aerodynamic evaluation, this work provides a practical framework for understanding the relationship between airfoil definition, geometry, and performance.

1. Introduction

The development of airfoil design throughout the twentieth century reflects a transition from empirical experimentation to systematic, theory-driven methodologies. Early efforts, such as those of the Wright brothers, relied on extensive wind tunnel testing to evaluate aerodynamic performance, laying the foundation for later parametric approaches in aerodynamics.

As aviation technology advanced, increasing structural demands led to the adoption of thicker airfoil sections, enabling cantilevered wing configurations and reducing the need for external bracing. Airfoils such as the Clark Y exemplified this shift, balancing aerodynamic efficiency with structural practicality.

A major advancement in airfoil development was introduced by the National Advisory Committee for Aeronautics (NACA), which formalized airfoil design through standardized, parameter-based definitions. NACA Technical Report No. 460 (1933) [4] provided a comprehensive experimental dataset for systematically related airfoils, while subsequent efforts, including NASA Technical Memoranda [6, 7], established computational procedures for generating airfoil geometries from analytical formulations.

Despite the availability of these formulations, a gap remains between theoretical airfoil definitions and their practical implementation as usable geometric models within engineering workflows. In particular, the transformation from parametric definitions to coordinate-based representations is often treated as a procedural step rather than a subject of investigation. Moreover, geometric characterization alone is insufficient to fully assess airfoil performance, as aerodynamic behavior—such as lift generation, drag characteristics, and sensitivity to pressure gradients—depends critically on flow conditions and design intent.

This study addresses these gaps by developing a parametric airfoil modeling framework implemented in an interactive spreadsheet environment. The tool enables the construction, visualization,

and transformation of classical NACA airfoil geometries, providing insight into how analytical definitions encode geometric characteristics. In addition, the generated airfoils are evaluated using aerodynamic analysis tools, allowing for comparative assessment of performance across different NACA series. Through this integrated approach, the work aims to bridge the gap between theoretical formulation, geometric representation, and aerodynamic performance in practical engineering applications.

2. Theoretical Evolution of NACA Airfoil Families

As early as the 1920s, research institutions in Europe and the United States began systematic measurements of the aerodynamic characteristics of airfoils in practical use, such as the *Tests of Related Forward-Camber Airfoils in The Variable-Density Wind Tunnel* in NACA Technical Report No. 610 [5]. The results were organized into families of airfoils exhibiting specific aerodynamic properties. With a catalog of experimentally validated airfoils, aircraft designers were able to select suitable profiles efficiently for particular flight applications.

The National Advisory Committee for Aeronautics (NACA) conducted one of the most comprehensive and systematic investigations into the influence of airfoil geometry on aerodynamic performance. Early cambered airfoils, such as the Clark-Y and Göttingen sections, were known from initial wind tunnel experiments to exhibit favorable aerodynamic characteristics. NACA adopted these existing profiles as references; by removing the camber and normalizing the thickness-to-chord ratio, the resulting geometries became systematically comparable. A polynomial curve fit was then used to define the thickness distribution, forming the foundation of many subsequent NACA airfoil families, including the classic NACA 00-series symmetric airfoils.

The airfoil geometry is defined in a Cartesian coordinate system in which the x -coordinate is measured along the chord line and normalized by the chord length c . The leading edge corresponds to $x = 0$, while the trailing edge corresponds to $x = 1$.

The airfoil surfaces are generated by superimposing the thickness distribution $y_t(x)$ onto the mean camber line $y_c(x)$. The upper and lower surface coordinates are therefore defined as

$$\begin{aligned} x_u &= x - y_t \sin \theta \\ y_u &= y_c + y_t \cos \theta \end{aligned} \tag{1}$$

$$\begin{aligned} x_l &= x + y_t \sin \theta \\ y_l &= y_c - y_t \cos \theta \end{aligned} \tag{2}$$

where the local inclination angle θ of the mean camber line is given by

$$\theta = \tan^{-1} \left(\frac{dy_c}{dx} \right) \tag{3}$$

2.1. Classical Thickness Distributions

The classical NACA thickness distributions were developed from empirical airfoil geometries and later expressed in analytical form to enable systematic aerodynamic studies. In particular, a common thickness distribution was identified across several successful airfoils, allowing the effects

of camber to be investigated independently.

During the period from 1925 to 1935, airfoils such as the Göttingen 398 and the Clark Y were widely used. When their camber was removed, their thickness distributions were found to be nearly identical. This observation motivated the adoption of a common thickness distribution combined with various camber lines to systematically study the effects of camber magnitude and location, which is clearly presented in NACA Report No. 460 [4].

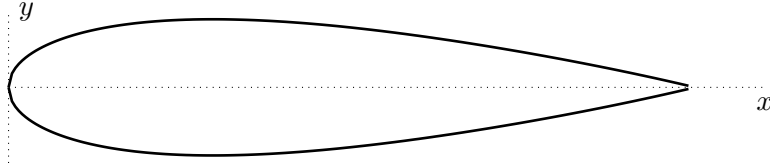


Figure 1: NACA 0020 profile

To illustrate the formulation of this thickness distribution, consider the development of the NACA 0020 airfoil equation.

A critical step in this process was the formulation of a mathematical expression for the basic symmetric thickness shape. The empirical geometric data corresponded to a 20 percent thick airfoil defined in a Cartesian coordinate system, with the leading edge located at the origin and the trailing edge at $x = 1$.

The empirical conditions were:

- (1) Maximum ordinate

$$x = 0.3, \quad y = 1.0, \quad \frac{dy}{dx} = 0$$

- (2) Ordinate at the trailing edge

$$x = 1.0, \quad y = 0.002$$

- (3) Trailing edge angle

$$x = 1.0, \quad \frac{dy}{dx} = -0.234$$

- (4) Nose shape

$$x = 0.1, \quad y = 0.078$$

To represent this thickness distribution mathematically, a combination of power series terms and a leading-edge square-root term was adopted, providing sufficient flexibility to match key geometric features observed experimentally.

$$\pm y = a_0\sqrt{x} + a_1x + a_2x^2 + a_3x^3 + a_4x^4$$

These conditions collectively provide five constraints for determining the five unknown coefficients, which leads to

$$\pm y = 0.2969\sqrt{x} - 0.1260x - 0.3516x^2 + 0.2843x^3 - 0.1015x^4$$

For airfoils of other thickness ratios within the same family, the ordinates of the 0.20 thickness-ratio model are scaled by the factor $(t/0.20)$, where t is the ratio of the maximum thickness to the chord, c .

$$\pm y = \left(\frac{t}{0.2} \right) (0.2969\sqrt{x} - 0.1260x - 0.3516x^2 + 0.2843x^3 - 0.1015x^4) \quad (4)$$

The leading-edge radius of this airfoil family is defined as the radius of curvature of the basic thickness equation evaluated at $x = 0$. Owing to the presence of the term $a_0\sqrt{x}$, the radius of curvature, obtained by taking the limit as x approaches 0 of the standard expression for the radius of curvature of the function $y(x)$, remains finite at the leading edge and can be shown to be

$$R_{LE} = \frac{a_0^2}{2} \left(\frac{t}{0.2} \right)^2 \approx 1.1019 t^2$$

The trailing-edge angle is defined as the angle between the upper and lower surfaces at the trailing edge. Because the upper and lower surfaces are symmetric with respect to the mean camber line for a symmetric airfoil, the total trailing-edge angle is twice the slope of the thickness distribution at $x = 1$ (or equivalently $x = c$ in dimensional form), which can be expressed as

$$\delta_{TE} = 2 \tan^{-1} \left[\frac{t}{0.2} \left(\frac{a_0}{2} + a_1 + 2a_2 + 3a_3 + 4a_4 \right) \right] \approx 2 \tan^{-1}(1.0625 t),$$

The classical thickness distribution and associated geometric relations described above are directly applicable to both the NACA 4-digit and 5-digit series. In these airfoil families, the thickness profile is defined independently of the camber line and is constructed using the same polynomial formulation, with scaling according to the specified thickness ratio while maintaining consistency with the standard NACA formulation.

2.2. NACA 4-Digit Series

The NACA 4-digit series represents one of the earliest airfoil families developed through a systematic mathematical framework to parameterize airfoil geometry in relation to aerodynamic characteristics. The designation system defines the airfoil through three primary parameters: the first digit specifies the maximum camber as a percentage of the chord; the second digit indicates the chordwise location of this maximum camber in tenths of the chord from the leading edge; and the final two digits represent the maximum thickness as a percentage of the chord, as described in NACA Report No. 460 [4].

Thus, the NACA 2412—a widely used representative airfoil—features a maximum camber of 2 percent of the chord located at 40 percent of the chord from the leading edge, with a maximum thickness of 12 percent of the chord.

Symmetrical airfoils constitute a critical subset of this family, in which the mean camber line coincides with the chord line. Because the maximum camber is zero, the first two digits are denoted as “00”, rendering the camber location parameter irrelevant. The NACA 0012 is one of the most widely used symmetric airfoils, commonly applied in horizontal and vertical stabilizers due to its near-zero pitching moment about the quarter-chord and its predictable aerodynamic behavior. For applications requiring a thinner profile, the NACA 0009 is often used

as a representative variant.

Despite its simplicity, the 4-digit series established the foundation for subsequent airfoil development by introducing a clear parametric relationship between geometry and aerodynamic behavior.

Mean Camber Lines

The mean camber line of the four-digit series is defined by two parabolic segments of the general form

$$y = b_0 + b_1x + b_2x^2$$

The constants are determined from the following boundary conditions:

(1) Mean-line extremities

$$\begin{aligned} x = 0, & & y = 0 \\ x = 1, & & y = 0 \end{aligned}$$

(2) Maximum ordinate of mean line

$$x = p, \quad y = m$$

Thus, the mean camber line is given by

$$y = \begin{cases} \frac{m}{p^2}(2px - x^2), & 0 \leq x \leq p \\ \frac{m}{(1-p)^2} [(1-2p) + 2px - x^2], & p \leq x \leq 1 \end{cases} \quad (5)$$

The slope of the camber line is obtained by differentiation:

$$\frac{dy}{dx} = \begin{cases} \frac{2m}{p^2}(p - x), & 0 \leq x \leq p \\ \frac{2m}{(1-p)^2}(p - x), & p \leq x \leq 1 \end{cases} \quad (6)$$

In practical applications, the parameters m , p , and t may be varied to tailor the aerodynamic characteristics of the airfoil. Increasing the maximum camber generally enhances the lift coefficient, while the camber location influences the pitching moment and pressure distribution. The thickness ratio affects structural strength, drag characteristics, and leading-edge radius.

By systematically varying these parameters, a wide range of airfoils can be generated within the four-digit series to meet specific design requirements.

2.3. NACA 5-Digit Series

Following the success of the 4-digit family, the NACA 5-digit series was developed to improve maximum lift capability and aerodynamic performance. While the series retains the same thickness distribution formulation as the 4-digit airfoils, it introduces a more complex mean camber line. The

primary design objective was to shift the maximum camber forward, as experimental observations indicated that this configuration can significantly increase the maximum lift coefficient ($C_{l_{max}}$), while also influencing pitching moment characteristics and drag behavior. The geometry and aerodynamic properties of the five-digit series are documented in NACA Report No. 537 [3].

The designation system reflects these performance-oriented considerations. The first digit is related to the design lift coefficient through a scaling factor of $3/2$. The second and third digits define the location of maximum camber, while the final two digits indicate the maximum thickness ratio. For simulation purposes, the 230-series is a commonly used representative of a high-lift, low-moment airfoil.

A specialized subset of this series incorporates reflexed camber lines, in which the trailing edge curves slightly upward. These airfoils are designed to produce a near-zero pitching moment about the quarter-chord, making them suitable for tailless or flying-wing configurations where longitudinal stability is critical. The NACA 23112 is a representative example of such a reflexed geometry. While offering favorable moment characteristics, these airfoils typically exhibit a slight reduction in maximum lift compared to standard 230-series sections.

This development represents an intermediate step toward performance-driven airfoil design, where geometric parameters are increasingly tuned to meet aerodynamic objectives.

Standard Mean Camber Lines

To obtain a camber line with a strongly forward maximum camber location, the so-called three-digit camber formulation was introduced in NACA Report No. 537 [3].

The camber line is defined in two regions such that the curvature (second derivative) decreases linearly to zero at a specified junction point $x = m$ and remains zero from that point to the trailing edge.

Thus,

$$\text{For } 0 \leq x \leq m: \quad \frac{d^2y}{dx^2} = k_1(x - m)$$

$$\text{For } m \leq x \leq 1: \quad \frac{d^2y}{dx^2} = 0$$

The design constraints are:

- (1) Mean-line extremities

$$\begin{aligned} x = 0, & & y = 0 \\ x = 1, & & y = 0 \end{aligned}$$

- (2) Continuity at the junction point $x = m$

$$y_N = y_T$$

$$\left(\frac{dy}{dx} \right)_N = \left(\frac{dy}{dx} \right)_T$$

where the subscripts N and T refer to the fore and aft equations, respectively.

The resulting camber line is

$$y = \begin{cases} \frac{k_1}{6} [x^3 - 3mx^2 + m^2(3 - m)x], & 0 \leq x \leq m \\ \frac{k_1 m^3}{6} (1 - x), & m \leq x \leq 1 \end{cases} \quad (7)$$

and the slope of the mean camber line is

$$\frac{dy}{dx} = \begin{cases} \frac{k_1}{6} [3x^2 - 6mx + m^2(3 - m)], & 0 \leq x \leq m \\ -\frac{k_1 m^3}{6}, & m \leq x \leq 1. \end{cases} \quad (8)$$

The parameter m is determined such that the maximum camber occurs at chordwise positions p calculated by multiplying the second digit by 0.05. Thus, second digits ranging from 1 to 5 correspond to standard maximum camber locations of $0.05c$ to $0.25c$ in increments of $0.05c$. From the condition that the derivative of the camber line is zero at the location of maximum camber p , the relationship between the maximum camber position p and the junction point m is obtained:

$$p = m \left[1 - \sqrt{\frac{m}{3}} \right].$$

The constant k_1 is selected such that the design lift coefficient (C_{l_i}) corresponds to the first digit multiplied by 0.15, thereby embedding aerodynamic performance targets directly into the camber-line formulation. Accordingly, first digits of 1, 2, and 3 correspond to ideal lift coefficients of 0.15, 0.30, and 0.45, respectively. The related parameters are tabulated in Table 1.

Table 1: Tabulated parameters of non-reflexed camber lines for $C_{l_i} = 0.3$

Camber-line designation	p	m	k ₁
210	0.05	0.0580	361.400
220	0.10	0.1260	51.640
230	0.15	0.2025	15.957
240	0.20	0.2900	6.643
250	0.25	0.3910	3.230

Reflexed Mean Camber Lines

To obtain a zero pitching moment about the quarter-chord, a reflexed mean line was introduced. In this formulation, the curvature is again defined piecewise:

$$\text{For } 0 \leq x \leq m: \quad \frac{d^2 y}{dx^2} = k_1(x - m)$$

$$\text{For } m \leq x \leq 1: \quad \frac{d^2 y}{dx^2} = k_2(x - m)$$

By imposing geometric continuity conditions identical to those of the standard mean camber line, the resulting reflexed camber-line equations are obtained as

$$y = \begin{cases} \frac{k_1}{6} \left[(x-m)^3 - \frac{k_2}{k_1} (1-m)^3 x - m^3 x + m^3 \right], & 0 \leq x \leq m \\ \frac{k_1}{6} \left[\frac{k_2}{k_1} (x-m)^3 - \frac{k_2}{k_1} (1-m)^3 x - m^3 x + m^3 \right], & m \leq x \leq 1 \end{cases} \quad (9)$$

Differentiation of the camber-line equations yields the corresponding slope expressions

$$\frac{dy}{dx} = \begin{cases} \frac{k_1}{6} \left[3(x-m)^2 - \frac{k_2}{k_1} (1-m)^3 - m^3 \right], & 0 \leq x \leq m \\ \frac{k_1}{6} \left[3 \frac{k_2}{k_1} (x-m)^2 - \frac{k_2}{k_1} (1-m)^3 - m^3 \right], & m \leq x \leq 1 \end{cases} \quad (10)$$

Enforcing the condition that the camber-line slope vanishes at the maximum camber location p yields the ratio $\frac{k_2}{k_1}$, expressed in terms of the position of maximum camber p and the junction point m .

$$\frac{k_2}{k_1} = \frac{3(m-p)^2 - m^3}{(1-m)^3}$$

For each prescribed value of p , the parameter m was determined such that the quarter-chord pitching moment vanished ($C_m = 0$). This condition produces a reflexed camber line capable of reducing the nose-down pitching tendency commonly associated with conventional cambered airfoils. Subsequently, k_1 was determined to satisfy the prescribed design lift coefficient of $C_l = 0.3$, thereby incorporating aerodynamic performance requirements directly into the camber-line formulation.

The tabulated values of m , k_1 , and k_2/k_1 are summarized in Table 2.

Table 2: Tabulated coefficients of reflexed camber for $C_{l_i} = 0.3$

Camber-line designation	p	m	k_1	k_2/k_1
211	0.05	¹	-	-
221	0.10	0.1300	51.990	0.000764
231	0.15	0.2170	15.793	0.00677
241	0.20	0.3180	6.520	0.0303
251	0.25	0.4410	3.191	0.1355

¹ The data for this airfoil are not included because the airfoil tested was subsequently found to differ from the intended airfoil through an error in deriving the ordinates.

In practical design applications, the defining parameters of the 5-digit series are not restricted to the tabulated integer values. Instead, they may be treated as continuous variables to achieve specific aerodynamic requirements. By adjusting the camber magnitude, camber location, and thickness ratio, designers can tailor the lift characteristics, pitching moment behavior, and drag performance to meet particular mission profiles. Thus, although originally defined by discrete designations, the five-digit formulation provides a flexible analytical framework for systematic airfoil development.

2.4. NACA 4- and 5-Digit Modified Series

The modified NACA 4- and 5-digit airfoil families were developed to allow greater geometric flexibility by enabling independent control of the leading-edge radius and thickness distribution, while preserving the baseline characteristics of the original series. In the modified designation, the airfoil number is followed by a dash and a two-digit suffix (e.g., NACA 0012-63). This suffix specifies the leading-edge radius index and the location of maximum thickness, expressed in tenths of the chord from the leading edge, as described in NACA Report No. 492 [11].

From an aerodynamic perspective, the leading-edge radius plays a critical role in determining pressure gradients and stall behavior, while the position of maximum thickness influences pressure distribution and boundary layer development along the airfoil surface. The ability to control these parameters independently therefore provides a means of tailoring aerodynamic performance to specific operating conditions. Such modifications also enable indirect control of minimum pressure location, which is closely associated with laminar flow behavior.

As in the original four-digit series, the thickness distribution ordinates (y-coordinates) scale linearly with the thickness-to-chord ratio. Thus, for any desired thickness ratio, the airfoil geometry is obtained by proportionally scaling the baseline thickness distribution.

The original NACA four-digit series can be viewed as a special case of the modified formulation, corresponding to a leading-edge index of $I = 6$ (standard leading edge) and a maximum thickness location at 30 percent of the chord. Hence, classical four-digit airfoils are embedded within the broader framework of the modified series.

This extension represents an early step toward localized geometric control in airfoil design, bridging the gap between purely parameterized formulations and more advanced aerodynamic design approaches based on pressure distribution shaping and performance optimization.

Modified Thickness Distributions

The thickness distribution is defined piecewise so that the leading-edge radius and the chordwise location of maximum thickness may be varied independently.

Similar to the thickness distributions formulation of NACA 4-digit and 5-digit series, a critical step in this process was the formulation of a mathematical expression for the basic symmetric thickness shape. The empirical geometric data corresponded to a 20 percent thick airfoil defined in a Cartesian coordinate system.

If the chord is taken at the position x axis from 0 to 1, the ordinates y from the leading edge to the maximum thickness location ($0 \leq x \leq m$):

$$\pm y_t = a_0\sqrt{x} + a_1x + a_2x^2 + a_3x^3 \quad (11)$$

From the maximum thickness location to the trailing edge ($m \leq x \leq 1$):

$$\pm y_t = d_0 + d_1(1 - x) + d_2(1 - x)^2 + d_3(1 - x)^3 \quad (12)$$

The constants are determined from the following geometric constraints:

- (1) Specified maximum thickness

$$x = m \quad y = 0.10 \quad \frac{dy}{dx} = 0$$

(2) Prescribed leading-edge radius

$$x = 0 \quad R_{LE} = \frac{a_0^2}{2}$$

(3) Specified radius of curvature at the point of maximum thickness

$$x = m \quad R = \frac{1}{2d_2 + 6d_3(1 - m)}$$

(4) Specified trailing-edge ordinate

$$x = 1 \quad y = d_0 = 0.002$$

(5) Prescribed trailing-edge angle

$$x = 1 \quad \frac{dy}{dx} = d_1 = f(m)$$

These conditions ensure the continuity of ordinate, slope, and curvature at the junction point $x = m$.

Table 3: Selected values of d_1 to avoid curvature reversals [11]

m	d₁
0.2	0.200
0.3	0.234
0.4	0.315
0.5	0.465
0.6	0.700

Once the value of d_1 is known, d_2 and d_3 are found by applying the geometric constraints (1) and (4) for the Eq. 12:

$$d_2 = \frac{0.294 - 2(1 - m)d_1}{(1 - m)^2}, \quad d_3 = \frac{-0.196 + (1 - m)d_1}{(1 - m)^3}$$

The radius of curvature R at the position of maximum thickness m then can be rewritten as

$$R = \frac{(1 - m)^2}{2d_1(1 - m) - 0.588}$$

With the d_i coefficients determined, the a_i coefficients can be found. First, a_0 is based on the leading edge radius:

$$\begin{aligned} a_0 &= 0.2969 \frac{I}{6}, \quad \text{for } I \leq 8 \\ &= 0.2969\sqrt{3}, \quad \text{for } I = 9 \end{aligned}$$

then the remaining coefficients can be derived as

$$\begin{aligned} a_1 &= \frac{0.3}{m} - \frac{15}{8} \cdot \frac{a_0}{m} + \frac{m}{2R} & a_2 &= -\frac{0.3}{m^2} + \frac{5}{4} \cdot \frac{a_0}{m^{3/2}} - \frac{1}{R} \\ a_3 &= \frac{0.1}{m^3} - \frac{0.375a_0}{m^{5/2}} + \frac{1}{2Rm} \end{aligned}$$

These values for a_i are referenced from *Appendix A: Geometry for Aerodynamics* the book *Lecture Notes on Configuration Aerodynamics* [8] by William H. Mason.

Leading-Edge Radius and Trailing-Edge Angle

The leading-edge index I controls the magnitude of the leading-edge radius and is proportional to the coefficient a_0 .

The relationship between the leading-edge radius R_{LE} and the index number I is given by

$$R_{LE} = \frac{a_0^2}{2} \left(\frac{t}{0.2} \right)^2 = \frac{1}{2} \left(0.2969 \frac{t}{0.2} \frac{I}{6} \right)^2.$$

Table 4: Leading-edge index classification

Type	Leading-edge Index	a_0
Sharp	0	0
Quarter-normal	3	0.148450
Normal	6	0.296900
Three-times normal ...	9	0.514246

The trailing-edge angle depends on the position of maximum thickness, m , and is given by

$$\delta_{TE} = 2 \tan^{-1} (d_1) = 2 \tan^{-1} [f(m)]$$

Modified Five-Digit Series

The modified five-digit airfoils retain the same camber-line definitions as the standard five-digit series while incorporating the modified thickness formulation described above.

Thus, the camber line follows the classical five-digit design equations, whereas the thickness distribution is replaced by modified polynomial expressions that provide enhanced control over leading-edge radius and thickness distribution characteristics, including the position of maximum thickness. This combination introduces additional flexibility in tailoring airfoil geometry for specific aerodynamic considerations.

In practical design applications, the modified formulation allows the defining parameters to be treated in a quasi-continuous manner rather than as discrete tabulated values. By adjusting camber magnitude, camber location, thickness ratio, leading-edge radius, and maximum thickness position, designers can systematically influence aerodynamic characteristics such as lift, drag, and pitching moment behavior.

Consequently, the modified NACA families provide a flexible analytical basis for preliminary

airfoil design.

2.5. NACA 1-Series and 16-Series

Unlike earlier airfoil families defined primarily through geometric parameterization, the NACA 1-series employed an inverse design philosophy in which target aerodynamic velocity distributions were used to determine the resulting airfoil geometry. By the late 1930s, research shifted from prescribing geometry to specifying a desired pressure distribution and deriving the corresponding shape. This approach enabled designers to tailor airfoils toward specific aerodynamic objectives, such as improving pressure distribution characteristics and delaying adverse pressure gradients, rather than relying solely on empirical geometric iteration. Consequently, 1-series airfoils are often represented through tabulated coordinate datasets derived from prescribed pressure distributions, as documented in NACA Report No. 824 [2].

The designation of the 1-series follows a five-digit format, exemplified by NACA 16-212. The first digit “1” identifies the series, while the second digit specifies the chordwise location of the minimum pressure point in tenths of the chord; here, “6” indicates a location at 60 percent of the chord. Following the hyphen, the next digit represents the design lift coefficient in tenths ($c_{l,i} = 0.2$), and the final two digits denote the maximum thickness ratio as a percentage of the chord.

The 16-series represents the most practically significant subset of this family, designed to maintain favorable pressure gradients over an extended portion of the chord. By shifting the minimum pressure location aft, these airfoils reduce leading-edge suction peaks and promote more gradual pressure recovery. While the thickness distribution of the 16-series exhibits similarities to the modified four-digit series—particularly in terms of leading-edge radius and thickness placement—its mean line is primarily determined by aerodynamic loading considerations, as described in NACA Report No. 492 [11].

This transition marks a fundamental shift from geometry-driven design toward physics-based formulation, where aerodynamic performance is embedded directly into the airfoil definition.

Mean Camber Lines

The mean camber lines for the 1-series and 16-series are derived from the theory of thin wing sections for a uniform (rectangular) chordwise load distribution. As discussed in *Theory of Wing Sections* [1], this camber line is a special case of the NACA 6-series mean line equation where the mean-line loading parameter (a) is set to 1.0. The ordinate y of the mean line is expressed as

$$y = -\frac{c_{l,i}}{4\pi} [(1-x) \ln(1-x) + x \ln(x)] \quad (13)$$

The local slope of the mean line, obtained by differentiating the above expression, is given by

$$\frac{dy}{dx} = \frac{c_{l,i}}{4\pi} [\ln(1-x) - \ln(x)] \quad (14)$$

2.6. NACA 6-Series and 6A-Series

While earlier NACA airfoils were not specifically designed to achieve controlled pressure distributions for drag reduction, the development of the NACA 6-series marked a transition toward

rigorous inverse airfoil design. By prescribing a target pressure distribution and deriving the corresponding geometry, engineers aimed to extend the region of laminar boundary layer flow. This design philosophy focuses on maintaining a favorable pressure gradient over a substantial portion of the chord, thereby reducing skin-friction drag through extended laminar flow and producing the characteristic "low-drag bucket"—a range of lift coefficients (C_l) around the design condition where the airfoil operates with high efficiency.

The 6-series designation reflects this complexity, described in NACA Report No. 824 [2], as illustrated by NACA 64₁-212, $a = 0.5$. The first digit "6" identifies the series, while the second digit ("4") specifies the chordwise position of minimum pressure in tenths of the chord behind the leading edge for the basic symmetrical section at zero lift. The subscript ("1") denotes the width of the low-drag bucket, corresponding to the range of lift coefficient in tenths above and below the design lift coefficient in which favorable pressure gradients exist on both surfaces. Following the hyphen, the digit "2" defines a design lift coefficient ($c_{l,i}$) in tenths, and the final two digits ("12") indicate a thickness ratio in percent of the chord. The parameter a controls the distribution of aerodynamic loading along the chord, influencing the extent of the favorable pressure gradient. When the mean-line designation is not given, it is understood that the uniform-load mean line ($a = 1.0$) has been used.

The 6-series represents the culmination of the classical NACA airfoil development, where aerodynamic performance is directly embedded into the airfoil definition through pressure distribution control.

Mean Camber Lines

Unlike the four-digit and five-digit families, the camber line of the NACA 6-series is determined using inverse aerodynamic design to achieve a specified pressure distribution. The mean lines commonly used with this series produce a uniform chordwise loading from the leading edge to the point $x = a$, followed by a linearly decreasing load to the trailing edge. The ordinates are computed using the following expression, derived from NACA Report No. 824 [2]:

$$y = \frac{c_{l,i}}{2\pi(1+a)} \left\{ \frac{1}{1-a} \left[\frac{1}{2}(a-x)^2 \ln|a-x| - \frac{1}{2}(1-x)^2 \ln(1-x) \right. \right. \\ \left. \left. + \frac{1}{4}(1-x)^2 - \frac{1}{4}(a-x)^2 \right] - x \ln x + g - hx \right\} \quad (15)$$

where the constants g and h are defined as

$$g = -\frac{1}{1-a} \left[a^2 \left(\frac{1}{2} \ln a + \frac{1}{4} \right) + \frac{1}{4} \right] \\ h = \frac{1}{1-a} \left[\frac{1}{2}(1-a)^2 \ln(1-a) - \frac{1}{4}(1-a)^2 \right] + g$$

The local slope of the mean line is given by

$$\frac{dy}{dx} = \frac{c_{l,i}}{2\pi(1+a)} \left\{ \frac{1}{1-a} \left[(1-x) \ln(1-x) - (a-x) \ln|a-x| \right] - \ln x - 1 - h \right\} \quad (16)$$

For the standard NACA 6-series, the mean-line loading is often set to $a = 1.0$, resulting in a uniform chordwise load across the entire chord. In this limiting case, the expressions simplify to the same forms used for the NACA 1-series:

$$y = -\frac{c_{l,i}}{4\pi} [(1-x) \ln(1-x) + x \ln(x)] \quad (17)$$

Thickness Distributions

The thickness distribution of the NACA 6-series airfoils is not obtained through simple empirical fitting, but is instead guided by aerodynamic considerations derived from inverse design methodologies. Rather than prescribing geometry directly, the design process is based on specifying a target pressure distribution and determining an airfoil shape consistent with this requirement. The theoretical foundations of this approach draw on potential flow theory and, more broadly, concepts from conformal mapping and complex analysis. These methods are discussed in NACA Report No. 824 [2], as well as in classical texts such as *Basic Wing and Airfoil Theory* [9] and *Theory of Wing Sections* [1].

The underlying framework is rooted in inviscid, irrotational flow theory, where solutions to Laplace’s equation can be transformed between geometries using conformal mappings. In classical aerodynamics, such transformations allow analytical flow solutions around simple geometries, such as circular cylinders, to be related to airfoil-like shapes. While the NACA 6-series airfoils are not directly generated using classical mappings, these methods provide important theoretical insight into the relationship between geometry and pressure distribution.

A well-known example is the Joukowski transformation,

$$w = z + \frac{\zeta^2}{z},$$

which maps a circular cylinder in the complex z -plane to an airfoil-like geometry in the w -plane. Although this transformation is not used directly in the construction of NACA 6-series airfoils, it serves as a classical theoretical reference illustrating how velocity and pressure distributions can be linked to airfoil geometry.

In the case of the NACA 6-series, these theoretical concepts are extended and adapted to guide the formulation of airfoil shapes that achieve prescribed pressure distributions, thereby promoting favorable pressure gradients and extended laminar flow over a significant portion of the chord.

A detailed mathematical derivation of these formulations is beyond the scope of this study; therefore, only the underlying theoretical framework is outlined to provide conceptual context.

NACA 6A-Series

The 6A-series was subsequently developed to address manufacturing and structural limitations associated with the original 6-series airfoils. In the standard formulation, the prescribed pressure distributions often produced a thin concave trailing-edge cusp, which was difficult to manufacture and structurally impractical. The 6A-series modifies this geometry by eliminating the cusp, producing a nearly straight trailing-edge region beyond approximately 80 percent chord [7].

In addition to geometric modification, the 6A-series incorporates revised loading characteristics associated with aft-loaded mean-line configurations ($a \approx 0.8$), which influence the pressure recovery process and pitching moment behavior. These adjustments improve structural practicality and manufacturing feasibility while retaining much of the laminar-flow performance advantages of the original 6-series.

Consequently, the 6A-series represents a refinement of the laminar-flow airfoil concept toward a more practical balance between aerodynamic efficiency, structural considerations, and manufacturability.

3. Methodology

The methodology is developed to enable a parametric reconstruction of classical NACA airfoil families, allowing systematic variation of defining parameters to investigate geometric evolution across different airfoil series. Complementing this framework, an aerodynamic analysis setup is implemented to assess the performance of the generated airfoils under consistent flow conditions, thereby establishing a direct connection between geometric design parameters and aerodynamic characteristics, including lift, drag, and pressure distribution.

3.1. Airfoil Geometry Generation

For the NACA 4- and 5-digit series, including their modified families, airfoil geometries are generated using classical analytical formulations. For airfoils without explicit analytical definitions, such as the NACA 6-series, a data-driven approach is adopted. In these cases, geometric coordinates are obtained from the *UIUC Airfoil Coordinates Database* [10], which provides standardized datasets for experimentally and computationally derived airfoils.

To enable computational processing and visualization, the airfoil geometry is represented as a discrete set of chordwise coordinates within a spreadsheet-based environment. The profile is reconstructed through systematic handling of upper and lower surface coordinates to ensure geometric continuity and consistency. This framework transforms raw numerical datasets into structured geometric representations suitable for visualization, parametric manipulation, and preliminary aerodynamic analysis. Furthermore, the implementation supports real-time parameter variation, enabling dynamic visualization of how design parameters influence airfoil geometry and associated aerodynamic characteristics.

Regarding the thickness distribution, the classical NACA formulations for the 4-digit and modified 4-digit series inherently produce a finite trailing-edge thickness, reflecting practical manufacturing considerations. However, many aerodynamic models, particularly Thin-Airfoil Theory, assume a geometrically sharp trailing edge. In addition, the Kutta condition is most naturally satisfied when the trailing-edge geometry is closed.

To accommodate aerodynamic analysis requirements, the implementation includes an optional reformulation of the classical thickness distribution by enforcing a zero-thickness condition at the trailing edge. This modification preserves the overall characteristics of the original distribution while producing a sharp trailing edge suitable for theoretical and computational aerodynamic applications.

Separately, when the original finite-thickness formulation is retained, the upper and lower surfaces do not intersect at $x = 1$. To ensure geometric closure during coordinate processing and visualization, an additional endpoint at $(0, 1)$ is introduced. This produces a closed airfoil contour, supporting numerical handling, CAD integration, and aerodynamic simulation workflows.

3.2. Coordinate Discretization Techniques

Uniform chordwise spacing, although straightforward to implement, often fails to adequately resolve regions of high geometric curvature, particularly near the leading edge. To address this limitation, non-uniform discretization strategies are required to improve geometric fidelity and enhance numerical robustness in subsequent computational applications.

In this study, full cosine spacing is adopted as the primary discretization method due to its ability to achieve high geometric accuracy without requiring an excessive number of points. This approach provides a balanced distribution along the chord, with clustering near both the leading and trailing edges. Such clustering is essential for accurately capturing the sharp leading-edge curvature and geometric sensitivity in the aft region. Moreover, this distribution is particularly suitable for aerodynamic applications, where accurate representation of pressure gradients along the airfoil surface is critical.

For a normalized chord ($x \in [0, 1]$), the cosine spacing is defined as:

$$x_i = \frac{1}{2} \left(1 - \cos \frac{i\pi}{N-1} \right), \quad i = 0, 1, \dots, N-1 \quad (18)$$

Alternatively, a half-cosine spacing may be employed when higher resolution is required primarily near the leading edge. This approach produces strong clustering in the vicinity of the leading edge while allowing a progressively coarser distribution toward the trailing edge. This distribution is effective for resolving the stagnation region and the initial pressure drop; however, it provides limited resolution in the aft portion of the airfoil. Consequently, geometric features and pressure recovery behavior near the trailing edge may not be captured with the same level of accuracy as in full cosine spacing.

3.3. Chord Length and Angle of Attack Processing

To facilitate the integration of airfoil geometries into CAD environments such as SolidWorks or CATIA, the model incorporates geometric transformations including scaling and rotation. These operations convert normalized airfoil coordinates into physical dimensions by applying a specified chord length (c) and an effective angle of attack (α).

Rotation for Angle of Attack

The angle of attack (α) is defined as the angle between the airfoil chord line and a reference freestream direction, which is assumed to be aligned with the horizontal axis. Adjustment of the

angle of attack is performed through a linear transformation of the coordinate vectors. For a given point represented as $\mathbf{p} = \begin{bmatrix} x & y \end{bmatrix}^T$, the rotated coordinates $\mathbf{p}' = \begin{bmatrix} x' & y' \end{bmatrix}^T$ are obtained using the standard two-dimensional rotation matrix:

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} \cos \alpha & \sin \alpha \\ -\sin \alpha & \cos \alpha \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} \quad (19)$$

In this formulation, a positive angle of attack corresponds to a clockwise rotation of the airfoil about the leading edge. This convention is equivalent to fixing the airfoil orientation and rotating the freestream direction upward, ensuring consistency with standard aerodynamic definitions.

Chord Scaling

Standard NACA coordinates are normalized with respect to the chord length, with $x \in [0, 1]$. To obtain physical dimensions, the rotated coordinates are scaled by the prescribed chord length c :

$$\begin{bmatrix} X \\ Y \end{bmatrix} = c \begin{bmatrix} x' \\ y' \end{bmatrix} \quad (20)$$

This scaling operation enables the direct generation of CAD-compatible geometry while preserving geometric similarity across different sizes and orientations.

3.4. Aerodynamic Analysis Setup

The evolution of NACA airfoil families reflects a progressive shift toward controlling aerodynamic characteristics through geometric design, including prescribed lift coefficients in the NACA 5-digit series, zero pitching moment in reflexed airfoils, and targeted pressure distributions in the NACA 1-series and 6-series. To investigate these characteristics, aerodynamic analyses are conducted using *XFLR5*, a graphical interface built upon *XFOIL*, specialized in two-dimensional airfoil analysis. The software provides a balance between computational efficiency and accuracy, making it suitable for comparative studies of airfoil performance under consistent operating conditions.

Four representative airfoils are selected to illustrate the evolution of design methodologies: NACA 0012 (symmetric baseline), NACA 2412 (moderately cambered), NACA 23012 (refined camber distribution), and NACA 63-215 (pressure-distribution-based design). These airfoils are chosen to reflect key stages in the historical development of airfoil design. The selected airfoils do not share identical thickness ratios; therefore, the comparison focuses on qualitative differences in design philosophy rather than direct performance equivalence. Retaining the original geometric parameters allows the characteristic features of each airfoil family to be preserved.

All analyses are performed at a Reynolds number of 3×10^6 , representative of typical low-speed aerodynamic conditions. The angle of attack is varied from -5 degrees to $20 - 25$ degrees to capture both pre-stall and post-stall behavior. Aerodynamic performance is evaluated through lift coefficient (C_l), drag coefficient (C_d), and pitching moment coefficient (C_m) as functions of angle of attack (α). In addition, lift-drag polars ($C_l - C_d$) are constructed to assess aerodynamic efficiency. The pressure coefficient (C_p) distribution is evaluated at a prescribed lift coefficient of $C_l = 0.4$ to ensure a consistent basis for comparison across different airfoil geometries.

4. Results

4.1. Geometric Comparison of Representative Airfoils

Representative airfoils from different NACA series are generated to illustrate geometric variation across design approaches.

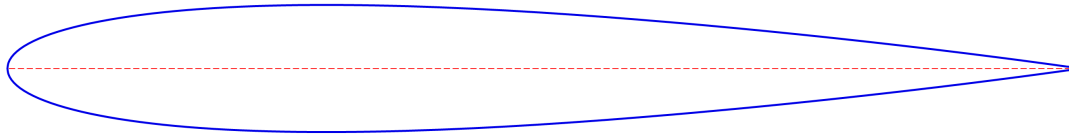


Figure 2: NACA 0012

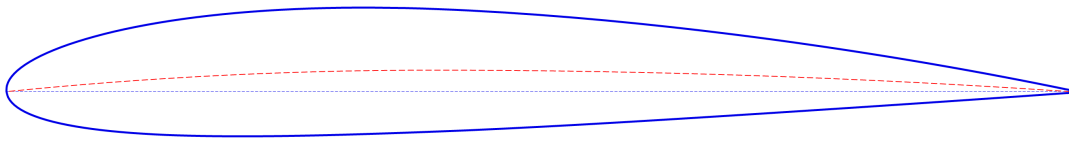


Figure 3: NACA 2412

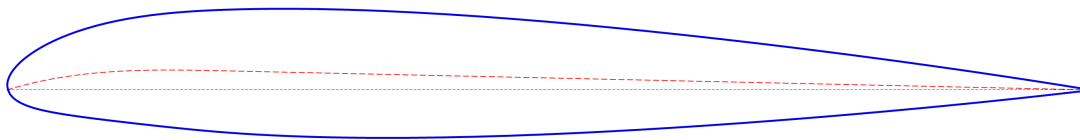


Figure 4: NACA 23012

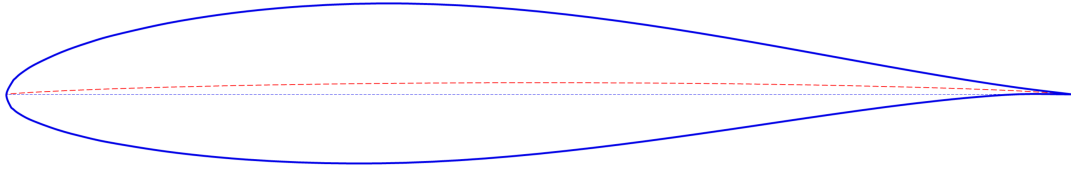


Figure 5: NACA 63-215

A comparison between representative airfoils from different NACA series highlights the geometric evolution from simple camber-based design to more advanced, performance-oriented formulations. The symmetric airfoil NACA 0012 serves as a baseline, exhibiting a purely thickness-defined geometry with zero camber. Consequently, its upper and lower surfaces are mirror images, providing a neutral reference for evaluating the effect of camber.

In contrast, NACA 2412 introduces a moderate camber, shifting the mean camber line upward and creating geometric asymmetry. This results in increased curvature, particularly in the forward portion of the chord, illustrating the role of camber in lift generation. The rounded leading edge also contributes to smoother flow attachment and improved stall characteristics.

The NACA 23012 further refines the camber distribution by shifting the maximum camber forward and modifying the curvature profile. Compared to the 2412, this configuration enhances lift performance while maintaining a relatively smooth geometric transition, reflecting a shift toward more performance-oriented design principles.

The NACA 63-215 represents a more advanced stage of airfoil development, where the geometry is derived from prescribed pressure distribution characteristics. The surface curvature and camber are tailored to control aerodynamic behavior, particularly with respect to laminar flow. Notably, the presence of a cusped trailing edge contributes to smoother pressure recovery, which is consistent with designs aimed at minimizing drag.

Overall, the comparison illustrates a clear progression: from symmetric thickness-based geometry, to simple cambered profiles, to refined camber shaping, and finally to geometries that implicitly encode aerodynamic performance objectives. This progression reflects the transition from geometry-driven design to aerodynamically driven design methodologies.

4.2. Comparison of Aerodynamic Characteristics of Representative Airfoils

Lift Characteristics

The variation of lift and pitching moment coefficients with angle of attack, shown in Fig. 6a and Fig. 6b, provides insight into the effects of airfoil geometry on lift generation and aerodynamic stability.

The lift curves clearly demonstrate the influence of camber on aerodynamic performance. As shown in Fig. 6a, the symmetric NACA 0012 airfoil produces zero lift at zero angle of attack, as expected. In contrast, the cambered airfoils NACA 2412, NACA 23012, and NACA 63-215

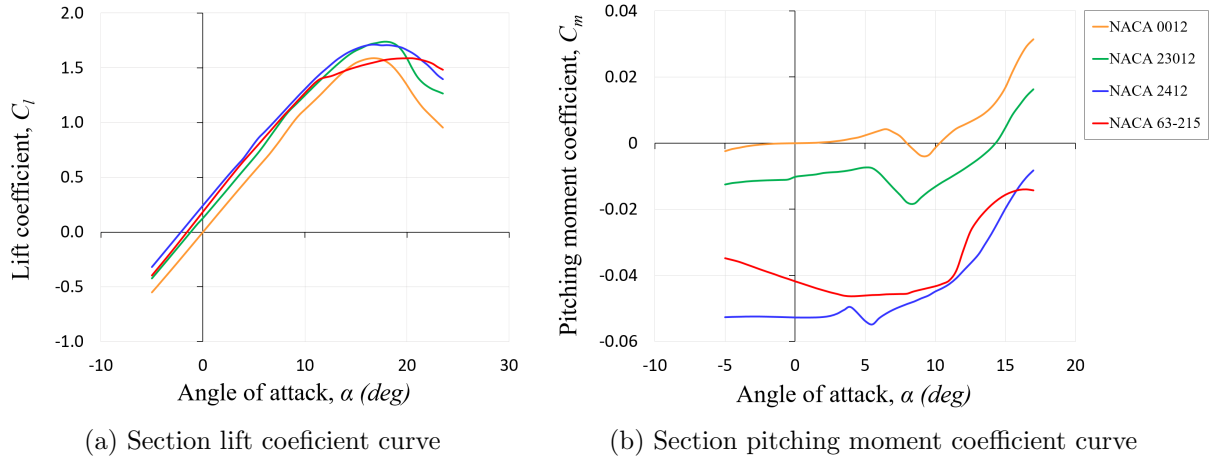


Figure 6: Lift characteristics analysis for representative NACA airfoils at $Re = 3 \times 10^6$

generate positive lift at zero angle of attack, indicating an upward shift of the lift curve due to geometric asymmetry and the associated redistribution of pressure.

Despite differences in camber magnitude and distribution, the lift curve slopes of all four airfoils remain approximately parallel, consistent with thin airfoil theory, indicating that camber primarily shifts the lift curve without significantly altering its slope. However, distinctions become evident near stall conditions. The NACA 2412 and NACA 23012 airfoils achieve higher maximum lift coefficients compared to the NACA 0012, reflecting the effect of increased camber. Among them, the NACA 23012 exhibits slightly higher lift in the pre-stall region, consistent with its design for enhanced lift characteristics. In contrast, the NACA 63-215 shows a more gradual variation near its maximum lift, indicating a different stall behavior associated with its pressure-distribution-based design.

The pitching moment characteristics further distinguish the airfoil families. The NACA 0012 exhibits nearly zero pitching moment across the angle-of-attack range, reflecting its symmetric geometry. In contrast, the NACA 2412 and NACA 23012 produce negative pitching moments, indicating a nose-down tendency caused by forward-shifted aerodynamic loading. The NACA 63-215 displays a distinct moment curve, with less negative values over a range of angles of attack, reflecting a different distribution of aerodynamic loading resulting from its laminar-flow-oriented design.

Taken together, these results illustrate a progression in airfoil design from the symmetric NACA 0012, where lift is generated primarily through angle of attack, to cambered airfoils such as NACA 2412 and 23012, where lift is enhanced through geometric shaping, and finally to the NACA 63-215, where aerodynamic characteristics are increasingly governed by controlled pressure distribution.

Aerodynamic Efficiency

The aerodynamic efficiency of the selected airfoils, illustrated in Fig. 7a and Fig. 7b, reveals how different design approaches influence drag characteristics and overall performance.

The aerodynamic efficiency characteristics highlight a clear evolution in airfoil design philosophy. The NACA 0012 airfoil exhibits moderate performance across a wide range of operating conditions,

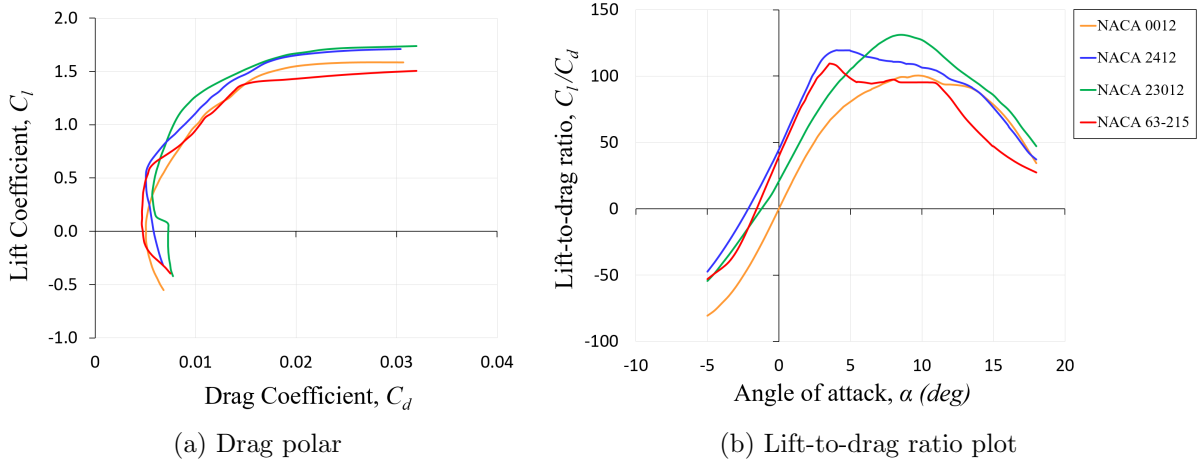


Figure 7: Aerodynamic efficiency analysis of representative NACA airfoils at $Re = 3 \times 10^6$

reflecting its general-purpose design with no camber.

The NACA 2412 airfoil demonstrates improved efficiency, achieving higher lift-to-drag ratios over a broad angle-of-attack range. This improvement becomes more pronounced in the NACA 23012 airfoil, which attains the highest lift-to-drag ratio among the selected airfoils, indicating a shift toward performance-oriented design. Such enhancement is associated with refined camber distributions that increase lift while maintaining relatively low drag.

In contrast, the NACA 63-215 airfoil does not exhibit superior performance across the entire operating range. Instead, its efficiency is concentrated within a narrower range of lift coefficients, where it performs competitively with the other airfoils. Outside this range, its performance decreases more rapidly, reflecting its design philosophy based on prescribed pressure distributions and laminar flow optimization.

Taken together, these results illustrate a fundamental transition from general-purpose aerodynamic performance, as seen in the NACA 0012, to enhanced camber-based efficiency in the NACA 2412 and 23012, and finally to targeted, condition-specific optimization in the NACA 63-215.

Pressure Distribution and Design Implications

The pressure coefficient distributions, presented in Fig. 8, Fig. 9, Fig. 10, and Fig. 11, provide a direct visualization of how different airfoil designs manipulate pressure fields to achieve the same lift condition of $C_l = 0.4$. Solid lines represent viscous results at $Re = 3 \times 10^6$, while dashed lines indicate inviscid solutions.

Although all airfoils generate the same lift, the underlying pressure distributions differ significantly, reflecting fundamentally different mechanisms of lift generation and boundary layer control.

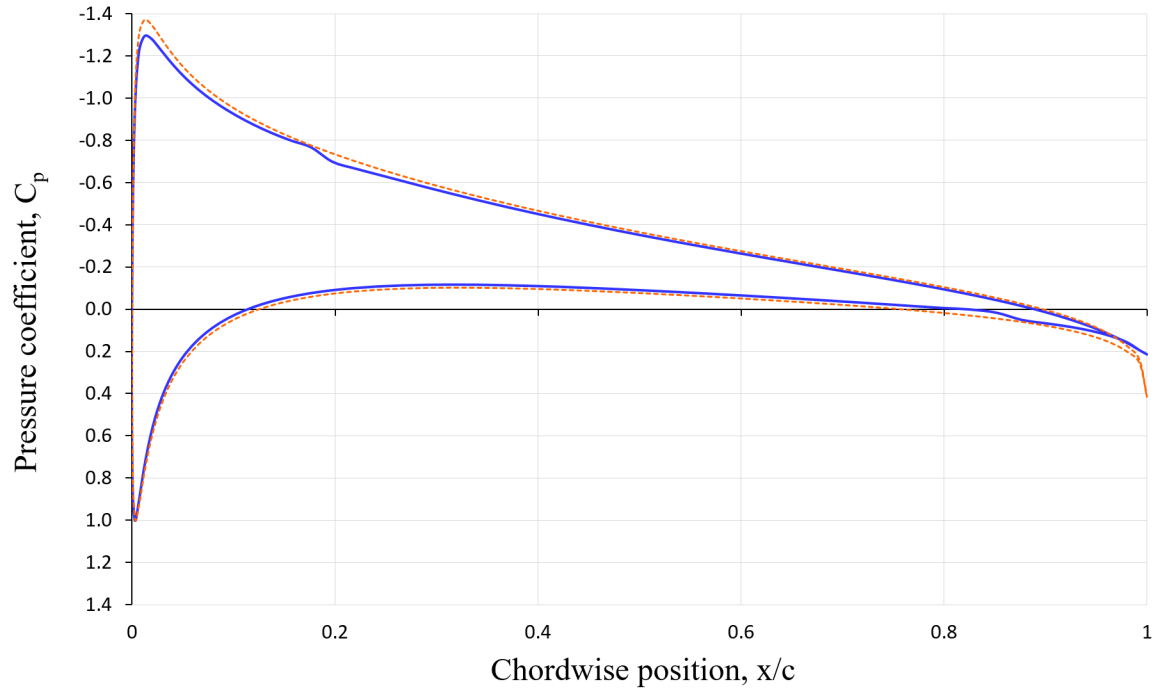


Figure 8: Pressure coefficient distribution of the NACA 0012 airfoil at $C_l = 0.4$

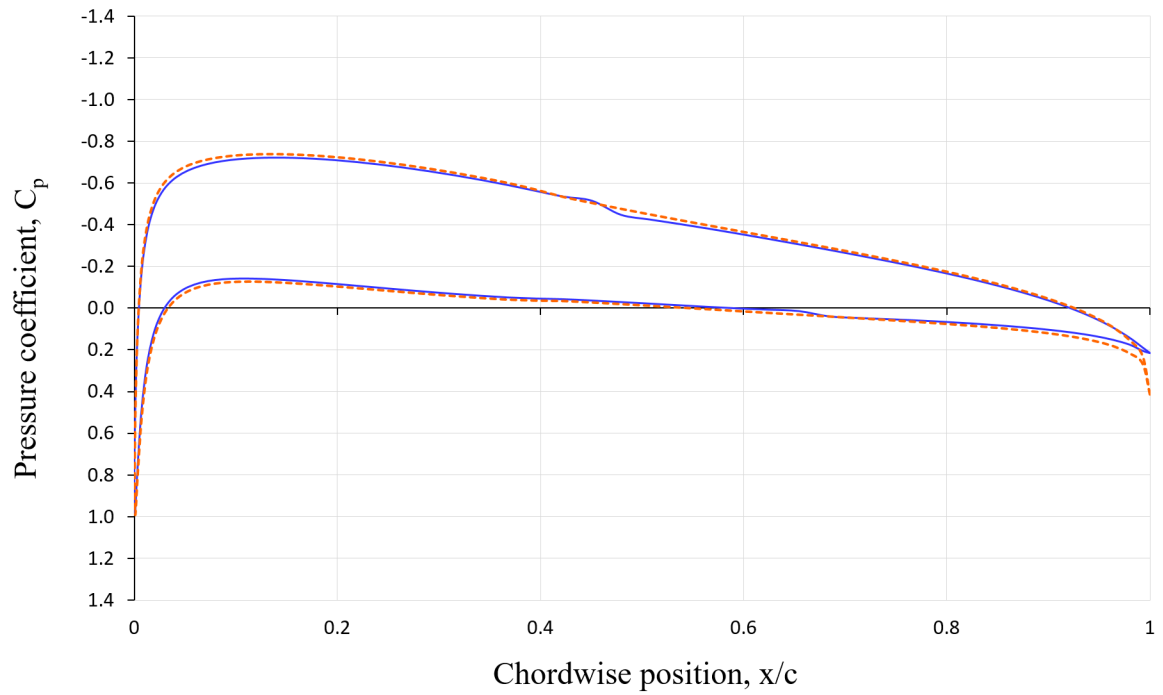


Figure 9: Pressure coefficient distribution of the NACA 2412 airfoil at $C_l = 0.4$

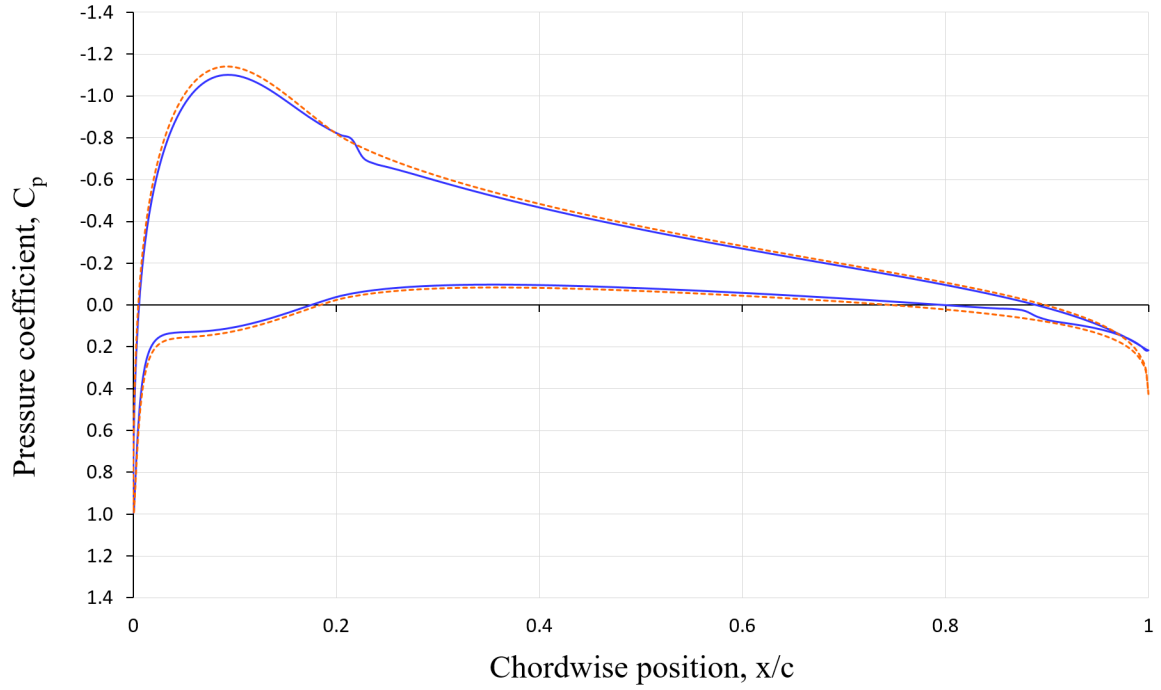


Figure 10: Pressure coefficient distribution of the NACA 23012 airfoil at $C_l = 0.4$

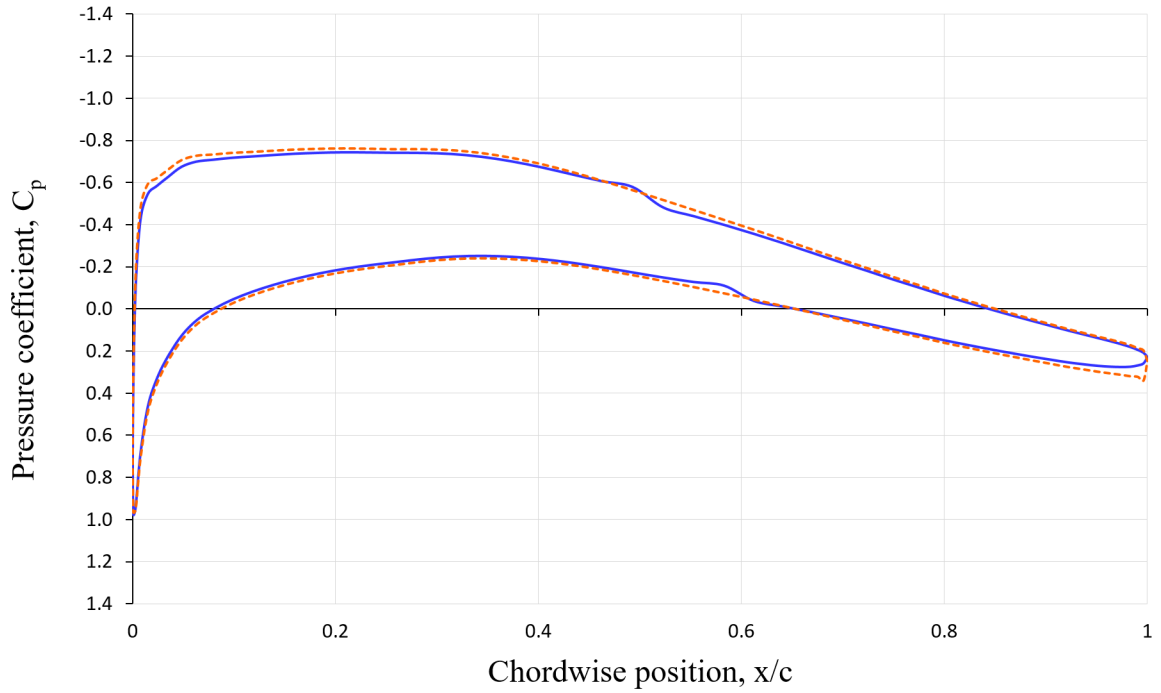


Figure 11: Pressure coefficient distribution of the NACA 63-215 airfoil at $C_l = 0.4$

The symmetric NACA 0012 exhibits a pronounced leading-edge suction peak followed by a relatively rapid pressure recovery. This behavior indicates that lift is primarily achieved through angle of attack, resulting in a strong adverse pressure gradient that increases susceptibility to flow separation.

With the introduction of camber in the NACA 2412, the suction peak is reduced and the pressure distribution becomes more smoothly distributed over the forward chord. This redistribution reflects a shift toward generating lift through geometric asymmetry rather than purely through incidence, thereby alleviating adverse pressure gradients and improving flow stability.

The NACA 23012 further refines this concept by shaping the pressure distribution to achieve a target design lift coefficient. Compared to the 2412, it maintains a moderate suction peak while exhibiting a more gradual and controlled pressure recovery, indicating a more deliberate management of boundary layer development aimed at delaying separation and enhancing aerodynamic efficiency.

A distinct transition in design philosophy is observed in the NACA 63-215 airfoil. Unlike the earlier families, it features a reduced leading-edge suction peak and an extended region of nearly constant pressure on the upper surface. This plateau corresponds to a sustained favorable pressure gradient, which promotes laminar flow and reduces skin friction drag. The delayed pressure recovery minimizes adverse gradients, reflecting an aerodynamic design approach that explicitly targets boundary layer control rather than relying solely on camber or angle of attack.

Overall, the progression from NACA 0012 to 63-215 illustrates a transition from geometry-driven lift generation to performance-driven aerodynamic design. Early airfoils rely on angle of attack and camber to produce lift, whereas later designs increasingly engineer the pressure distribution to control flow behavior, reduce drag, and satisfy specific aerodynamic objectives.

5. Discussion

5.1. Assessment and Comparison

The formulation and generation of classical NACA airfoil families in this study reflect the historical progression of airfoil design, from primarily geometry-driven approaches toward increasingly aerodynamically optimized design methodologies. While early airfoil families rely primarily on geometric parameterization, later developments increasingly incorporate aerodynamic considerations through theoretical and analytical frameworks, particularly those related to the theory of wing sections.

Despite these differences, the construction of classical NACA airfoils follows a common structural principle: the airfoil geometry is obtained by superimposing a thickness distribution onto a mean camber line. Within this framework, the camber line primarily governs lift characteristics, whereas the thickness distribution influences pressure distribution, boundary layer development, and flow behavior over the airfoil surface.

The standardized parametric formulation and nomenclature of NACA airfoils highlight the central role of design parameters in defining airfoil geometry and, consequently, aerodynamic behavior. Compared to conventional airfoil generation tools, the interactive spreadsheet-based framework developed in this study enables real-time modification of design parameters, providing immediate geometric feedback. This capability offers a clear demonstration of how individual parameters influence airfoil shape, supporting both analysis and educational understanding.

From an aerodynamic perspective, the differences between NACA airfoil families become more pronounced when considering lift-to-drag characteristics and flow behavior. The NACA 4-digit series exhibits relatively stable performance across a wide range of operating conditions, reflecting

its general-purpose design. In contrast, the 5-digit series achieves improved lift characteristics through refined camber distributions derived from theoretical considerations. The NACA 6-series, designed based on prescribed pressure distributions, aims to maintain extended regions of laminar flow, thereby reducing drag. However, this performance is highly sensitive to operating conditions, particularly Reynolds number and surface quality, as adverse pressure gradients may lead to premature flow separation outside the design envelope. This progression indicates that the evolution of NACA airfoil families closely reflects the broader philosophy of aircraft aerodynamic design: reducing drag while maintaining sufficient lift and aerodynamic stability for the intended operating conditions.

From a broader perspective, classical NACA airfoil families represent key milestones in the evolution of aerodynamic design throughout the twentieth century. Subsequent developments have moved toward inverse design and optimization-based approaches, where desired aerodynamic performance dictates the resulting geometry. In modern aerodynamic design practice, engineers often specify target pressure distributions or performance metrics such as lift-to-drag ratio, then employ inverse design techniques and computational fluid dynamics (CFD) methods to iteratively refine airfoil geometries.

This study situates classical NACA airfoils within this broader context, illustrating how increasing mathematical sophistication and theoretical insight enable greater control over aerodynamic performance. At the same time, it highlights the inherent trade-off between design flexibility and implementation complexity when translating analytical formulations into practical geometric models. Essentially, the observation reinforces the importance of parametric modeling as a bridge between theoretical formulation and practical aerodynamic design.

5.2. Engineering Relevance

This study project establishes a structured bridge between classical airfoil theory and practical engineering workflows by transforming analytical formulations into engineering-ready geometric datasets. Through the systematic implementation of NACA airfoil definitions, the model enables the direct generation of airfoil coordinates that can be readily integrated into CAD environments for preliminary design and prototyping.

Beyond geometric visualization, the generated normalized datasets ($c = 1$) can be directly imported into preliminary aerodynamic analysis tools such as *XFOIL* and *XFLR5*, enabling the evaluation of lift, drag, and pitching moment characteristics under varying flow conditions. Although simplified, these analyses provide useful preliminary insight into aerodynamic trends and relative performance differences among airfoil families. This capability extends the scope of the project from purely geometric modeling to preliminary aerodynamic assessment, allowing users to explore how variations in airfoil parameters influence performance. The parametric nature of the model further supports the systematic generation of airfoil datasets, facilitating the construction of structured airfoil databases. Such datasets are valuable for comparative studies, sensitivity analysis, and early-stage optimization, where multiple configurations must be evaluated efficiently.

From an educational perspective, this project provides a practical framework for understanding how theoretical formulations—ranging from classical geometric parameterization to inverse design concepts—are translated into engineering-ready representations. It highlights the workflow by

which abstract mathematical definitions evolve into analyzable and manufacturable geometries, reflecting a simplified and educational representation of modern aerodynamic design practices.

As such, the project not only reinforces fundamental aerodynamic concepts but also introduces a scalable methodology that can be extended toward higher-fidelity computational analysis and multidisciplinary design applications.

5.3. Limitations

While this study incorporates preliminary aerodynamic analysis through tools such as *XFOIL* and *XFLR5*, the scope of evaluation remains limited to low-fidelity computational methods. The results are therefore sensitive to assumptions inherent in these tools, particularly with respect to laminar flow modeling and simplified viscous effects.

In addition, the present analysis is also limited to two-dimensional airfoil behavior and does not account for three-dimensional wing effects such as induced drag or spanwise flow. Consequently, the aerodynamic performance results should be interpreted as indicative rather than definitive.

Furthermore, the current implementation focuses on classical analytical formulations and does not incorporate modern optimization techniques or high-fidelity computational fluid dynamics (CFD) simulations. Future work may extend this framework to include more advanced aerodynamic modeling and experimental validation to improve accuracy and applicability in real-world engineering design.

6. Conclusion

This study investigates the geometric evolution of classical NACA airfoil families, demonstrating how airfoil design progressively evolved from simple geometric parameterization toward increasingly aerodynamic-driven methodologies. While early NACA series relied primarily on analytical geometric definitions, later developments incorporated aerodynamic considerations such as prescribed lift characteristics, pressure-distribution control, laminar-flow behavior, and pitching moment management.

The comparative analysis of different airfoil families highlights how changes in camber-line formulation, thickness distribution, and loading philosophy influence aerodynamic behavior and design intent. In particular, the transition from geometry-based formulations to pressure-distribution-oriented approaches illustrates the growing integration of aerodynamic theory into practical airfoil development throughout the twentieth century.

The spreadsheet-based implementation developed in this work provides a computational framework for reconstructing, visualizing, and processing airfoil geometries for engineering applications. By linking analytical definitions with coordinate-based geometric representation and preliminary aerodynamic evaluation, the study demonstrates how classical airfoil theory can be translated into practical computational workflows suitable for design exploration and educational analysis.

Overall, this work emphasizes the role of airfoil geometry as an interface between aerodynamic theory and engineering implementation. Although limited to preliminary aerodynamic assessment and low-fidelity modeling, the framework establishes a foundation for future extensions involving higher-fidelity CFD simulations, aerodynamic optimization, inverse design methodologies, and multidisciplinary aerospace design applications.

References

- [1] Ira H. Abbott and Albert E. von Doenhoff. *Theory of Wing Sections: Including a Summary of Airfoil Data*. Dover Publications, Inc., 1949.
- [2] Ira H. Abbott, Albert E. von Doenhoff, and Louis S. Stivers, Jr. Summary of Airfoil Data. Technical Report NACA Report No. 824, National Advisory Committee for Aeronautics, 1945. URL <https://ntrs.nasa.gov/citations/19930090976>.
- [3] Eastman N. Jacobs and Robert M. Pinkerton. Tests in the Variable-Density Wind Tunnel of Related Airfoils Having the Maximum Camber Unusually Far Forward. Technical Report NACA Report No. 537, National Advisory Committee for Aeronautics, 1935. URL <https://ntrs.nasa.gov/citations/19930091610>.
- [4] Eastman N. Jacobs, Kenneth E. Ward, and Robert M. Pinkerton. The Characteristics of 78 Related Airfoil Sections from Tests in the Variable-Density Wind Tunnel. Technical Report NACA Report No. 460, National Advisory Committee for Aeronautics, 1933. URL <https://ntrs.nasa.gov/citations/19930091108>.
- [5] Eastman N. Jacobs, Robert M. Pinkerton, and Harry Greenberg. Tests of Related Forward-Camber Airfoils in the Variable-Density Wind Tunnel. Technical Report NACA Report No. 610, National Advisory Committee for Aeronautics, 1937. URL <https://ntrs.nasa.gov/citations/19930091685>.
- [6] Charles L. Ladson and Jr. Brooks, Cuyler W. Development of a Computer Program to Obtain Ordinates for NACA 4-Digit, 4-Digit Modified, 5-Digit, and 16-Series Airfoils. Technical Report NASA TM X-3284, NASA Langley Research Center, Hampton, Virginia, United States, 1975. URL <https://ntrs.nasa.gov/citations/19760004140>.
- [7] Charles L. Ladson, Jr. Brooks, Cuyler W., Acquilla S. Hill, and Darrell W. Sproles. Computer Program to Obtain Ordinates for NACA Airfoils. Technical Report NASA TM-4741, NASA Langley Research Center, Hampton, Virginia, United States, 1996. URL <https://ntrs.nasa.gov/citations/19960052267>.
- [8] William H. Mason. Configuration Aerodynamics. Virginia Tech, Department of Aerospace and Ocean Engineering, 2006. URL <https://pressbooks.lib.vt.edu/configurationaerodynamics/>.
- [9] Alan Pope. *Basic Wing and Airfoil Theory*. McGraw-Hill Book Company, Inc., 1951.
- [10] Michael S. Selig. UIUC Airfoil Coordinates Database, 1996. URL https://m-selig.ae.illinois.edu/ads/coord_database.html.
- [11] John Stack and Albert E. von Doenhoff. Tests of 16 Related Airfoils at High Speeds. Technical Report NACA Report No. 492, National Advisory Committee for Aeronautics, 1934. URL <https://ntrs.nasa.gov/citations/19930091566>.