TKP SERIES · PRESSURE BOOSTER PUMPS

TKP600
TKP800

Single-phase pressure booster pumps for domestic water supply.

Power P2	0.4 / 0.6 kW
Max. head	40 / 55 m
Max. flow	3 / 4 m³/h
Power supply	1~ 220–240 V 50 Hz

APPLICATIONS

- Boosting tap pressure in houses and apartments
- Supplying showers, water heaters and washing machines
- Raising pressure from roof tanks and mains supply
- Garden watering

PRESSURE BOOSTER PUMPS

TKP600 · TKP800 · 1~ 220–240 V 50 Hz

Redpump
Italy Standard




MAIN DATA

Model	P2	Duty point
TKP600	0.4 kW	2 m³/h – 20 m
TKP800	0.6 kW	3 m³/h – 20 m

Duty point: operating point stated in the quotation. Max. head at Q = 0; max. flow at H = 0.

PERFORMANCE CURVES

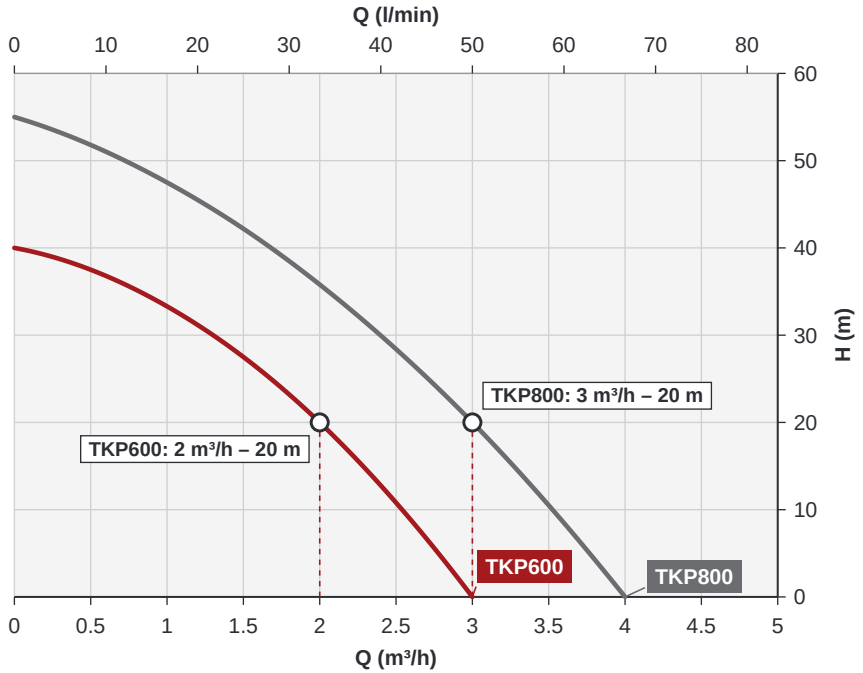

Curves at 50 Hz, clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE DATA

Model 1~	P2	P2	Q (m³/h)	0	0.5	1	1.5	2	2.5	3	3.5	4
	kW	HP	Q (l/min)	0	8	17	25	33	42	50	58	67
TKP600	0.4	0.54	H (m)	40	37.5	33.3	27.5	20	10.8	0	–	–
TKP800	0.6	0.8		55	51.8	47.5	42.2	35.8	28.4	20	10.5	0

Head values between max. head, duty point and max. flow are read on the performance curve.