6SP60 stainless steel submersible well pumps

Rated flow 60 m³/h · 6-inch wells · 2 to 20 impellers.

Power P2	4–37 kW
Flow rate	up to 78 m³/h
Head	up to 280 m
Pump efficiency	up to 74.3 %
Outlet	3 in
Power supply	3~ 380–415 V 50 Hz
Speed	n ≈ 2850 /min
Min. well diameter	6 in

Redpump
Italy Standard

6SP60

STAINLESS STEEL SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min



APPLICATIONS

- For water supply from wells or reservoirs
- For domestic use, for civil and industrial applications
- For garden use and irrigation

OPERATING CONDITIONS

- Maximum fluid temperature: 50 °C
- Maximum sand content: 0.25%
- Minimum well diameter: 6 in

MOTOR AND PUMP

- Rewindable motor
- Three-phase: 380–415 V / 50 Hz
- 1. Direct start (1 cable)
- 2. Star-delta start (2 cables)
- Equipped with start control box or digital auto-control box
- NEMA dimension standards

OPTIONS ON REQUEST

- Special mechanical seal

MATERIALS

Component	Material
Delivery casing	AISI 304 SS
Suction lantern	AISI 304 SS
Diffuser	AISI 304 SS
Impeller	AISI 304 SS
Pump shaft	AISI 316 SS
Shaft coupling	AISI 316 SS
Wear ring	Rubber
Motor external casing	AISI 304 SS
Seal	NBR Graphite-SIC/TC
Motor shaft	AISI 304 SS-ASTM 5140

MODEL CODE

6	Well diameter (in)
SP	Series
60	Rated flow (m³/h)
7	Number of impellers


Example: 6SP60-7

1

Performance curves


Group A and group B. Curves at 50 Hz, n ≈ 2850 /min. Data table: page 4.

GROUP A

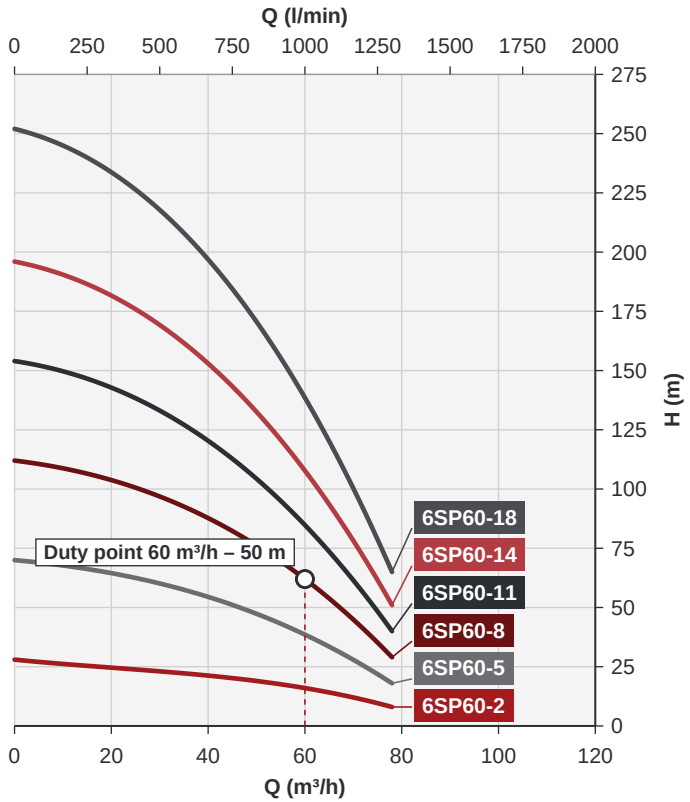

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm^2/s. Typical values, not guaranteed.

GROUP B

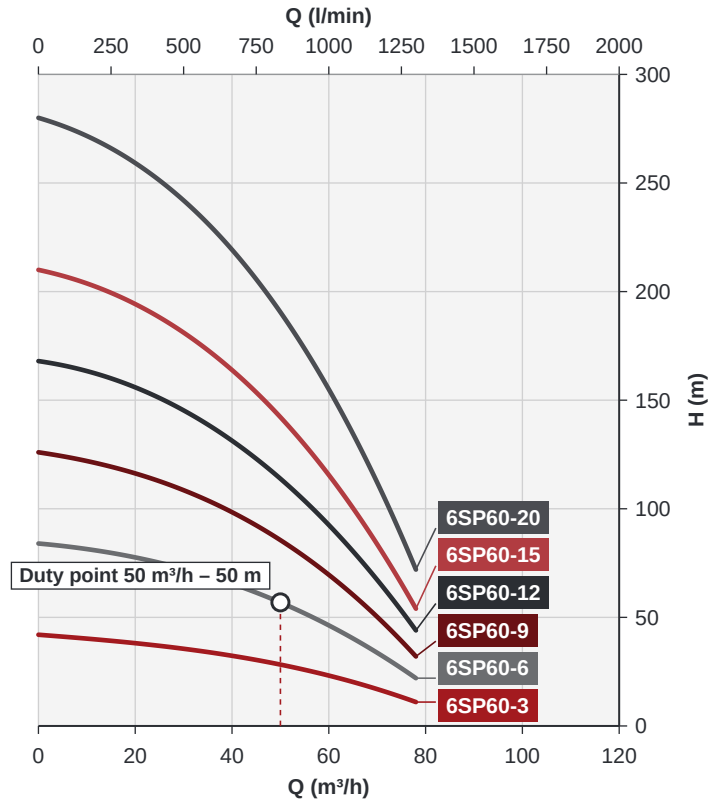


Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm^2/s. Typical values, not guaranteed.

2

Curves, efficiency and duty points


Group C, pump efficiency curve of the 6SP60 range and the two duty points.

GROUP C

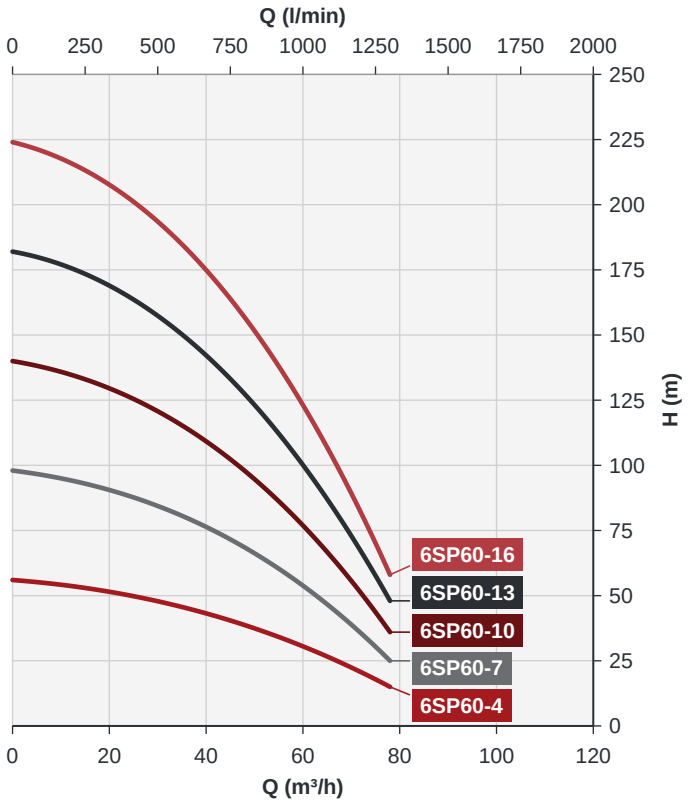

Curves at 50 Hz, 2 poles (≈ 2850 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PUMP EFFICIENCY η

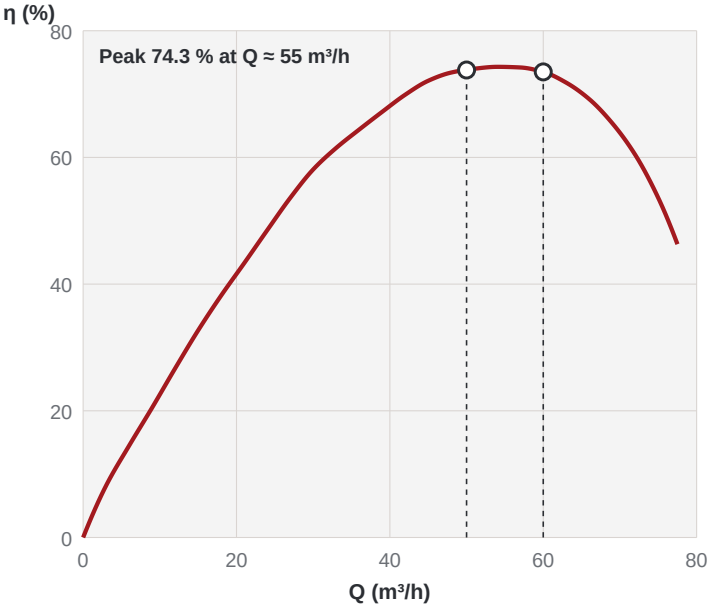

DUTY POINTS

Model	Q	H	η pump	P2
6SP60-6	50 m³/h	56.9 m	73.8 %	11 kW / 15 HP
6SP60-8	60 m³/h	62 m	73.5 %	15 kW / 20 HP

H read on the performance curve; η read on the pump efficiency curve of the 6SP60 range (pump only, without motor). Curves at 50 Hz, 2 poles, n ≈ 2850 /min, clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

3

Performance data

Three-phase 3~ 380–415 V 50 Hz. Q in m³/h and l/min, H in m.

PERFORMANCE DATA · 6SP60

Model 3~	P2	P2	Q (m³/h)	0	6	12	18	24	30	36	42	48	54	60	66	72	78
	kW	HP	Q (l/min)	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300
6SP60-2	4	5.5		28	27	26	25	24	23	22	21	19	18	16	14	11	8
6SP60-3	5.5	7.5		42	41	40	39	38	36	33	31	29	26	23	20	16	11
6SP60-4	7.5	10		56	55	54	53	52	48	44	41	38	35	31	26	21	15
6SP60-5	9.2	12.5		70	69	68	67	65	60	55	52	48	44	39	33	26	18
6SP60-6	11	15		84	83	82	81	78	72	66	62	58	53	47	40	31	22
6SP60-7	13	17.5		98	97	96	95	91	84	77	72	67	62	55	46	36	25
6SP60-8	15	20		112	111	110	109	104	96	89	83	77	71	63	53	42	29
6SP60-9	18.5	25		126	125	124	122	116	108	100	93	86	80	70	60	47	32
6SP60-10	18.5	25	**H (m)**	140	139	138	136	129	120	111	103	96	88	78	66	52	36
6SP60-11	22	30		154	153	152	150	142	132	122	114	106	97	86	73	57	40
6SP60-12	22	30		168	167	166	164	155	144	133	124	116	106	94	80	62	44
6SP60-13	26	35		182	181	180	178	168	156	144	134	126	114	102	86	68	48
6SP60-14	26	35		196	195	194	191	181	168	155	144	135	123	109	93	73	51
6SP60-15	26	35		210	209	208	204	194	180	166	154	144	132	117	100	78	54
6SP60-16	30	40		224	223	222	218	207	192	177	165	154	141	125	106	83	58
6SP60-18	37	50		252	251	250	245	233	216	199	186	173	159	141	119	93	65
6SP60-20	37	50		280	279	278	273	259	240	221	206	193	176	159	135	103	72

Curves on pages 2–3 are drawn as smooth curves through the table values (deviation ≤ 4.0 %); maximum head (Q = 0) and the last point of each curve are kept exactly.

4

Dimensions and motor data

Outlet 3 in. Dimensions in mm: P pump, M motor, T total length.

DIMENSIONS · 6SP60 · OUTLET 3 in

Model	kW	HP	P (mm)	M (mm)	T (mm)
6SP60-2	4	5.5	498	524	1022
6SP60-3	5.5	7.5	611	574	1185
6SP60-4	7.5	10	724	639	1363
6SP60-5	9.2	12.5	837	699	1536
6SP60-6	11	15	950	764	1714
6SP60-7	13	17.5	1063	824	1887
6SP60-8	15	20	1176	884	2060
6SP60-9	18.5	25	1298	909	2207
6SP60-10	18.5	25	1420	909	2329
6SP60-11	22	30	1524	984	2508
6SP60-12	22	30	1628	984	2612
6SP60-13	26	35	1741	1059	2800
6SP60-14	26	35	1854	1059	2913
6SP60-15	26	35	1967	1059	3026
6SP60-16	30	40	2080	1134	3214
6SP60-18	37	50	2306	1208	3514
6SP60-20	37	50	2532	1208	3740

MOTOR DATA

Item	Value
Power supply	3~ 380–415 V 50 Hz
Speed	n ≈ 2850 /min
Start	Direct or star-delta
Motor	Rewindable
Outlet	3 in
Min. well diameter	6 in

WORKING LIMITS

- Maximum fluid temperature: 50 °C
- Maximum sand content: 0.25%
- Minimum well diameter: 6 in