## 6SP60 stainless steel submersible well pumps

Rated flow 60 m³/h · 6-inch wells · 2 to 20 impellers.

| | |
|---|---|
| Power P2 | 4–37 kW |
| Flow rate | up to 78 m³/h |
| Head | up to 280 m |
| Pump efficiency | up to 74.3 % |
| Outlet | 3 in |
| Power supply | 3~ 380–415 V 50 Hz |
| Speed | n ≈ 2850 /min |
| Min. well diameter | 6 in |

Redpump
Italy Standard

# 6SP60

**STAINLESS STEEL SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min**



## APPLICATIONS

- For water supply from wells or reservoirs
- For domestic use, for civil and industrial applications
- For garden use and irrigation

## OPERATING CONDITIONS

- Maximum fluid temperature: 50 °C
- Maximum sand content: 0.25%
- Minimum well diameter: 6 in

## MOTOR AND PUMP

- Rewindable motor
- Three-phase: 380–415 V / 50 Hz
- 1. Direct start (1 cable)
- 2. Star-delta start (2 cables)
- Equipped with start control box or digital auto-control box
- NEMA dimension standards

## OPTIONS ON REQUEST

- Special mechanical seal

## MATERIALS

| Component | Material |
|---|---|
| Delivery casing | AISI 304 SS |
| Suction lantern | AISI 304 SS |
| Diffuser | AISI 304 SS |
| Impeller | AISI 304 SS |
| Pump shaft | AISI 316 SS |
| Shaft coupling | AISI 316 SS |
| Wear ring | Rubber |
| Motor external casing | AISI 304 SS |
| Seal | NBR Graphite-SIC/TC |
| Motor shaft | AISI 304 SS-ASTM 5140 |

## MODEL CODE

| | |
|---|---|
| 6 | Well diameter (in) |
| SP | Series |
| 60 | Rated flow (m³/h) |
| 7 | Number of impellers |


Example: 6SP60-7

# 1

# Performance curves


Group A and group B. Curves at 50 Hz, n ≈ 2850 /min. Data table: page 4.

## GROUP A

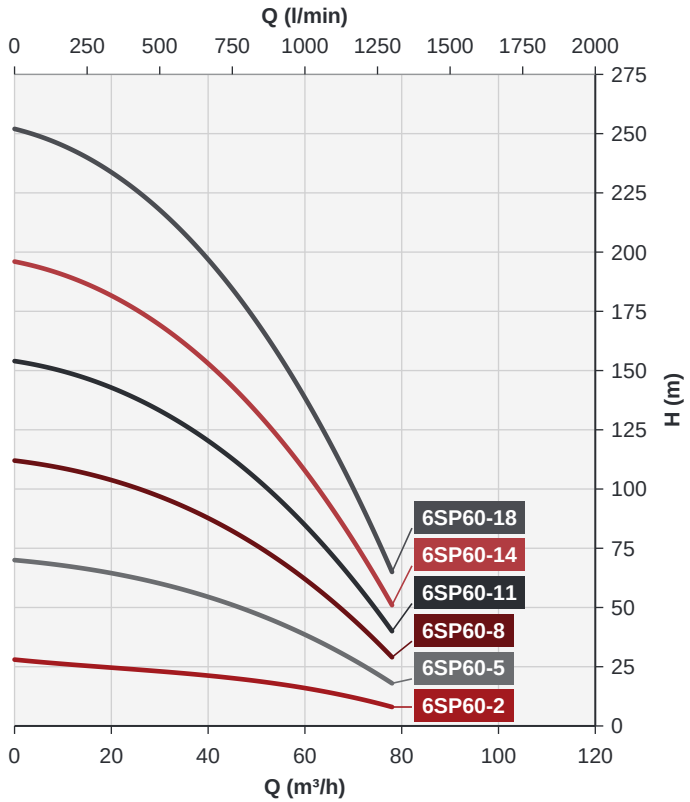


Curves at 50 Hz, 2 poles (≈ 2850 $min^{-1}$), clean water at 20 °C, kinematic viscosity 1 $mm^2/s$. Typical values, not guaranteed.

## GROUP B

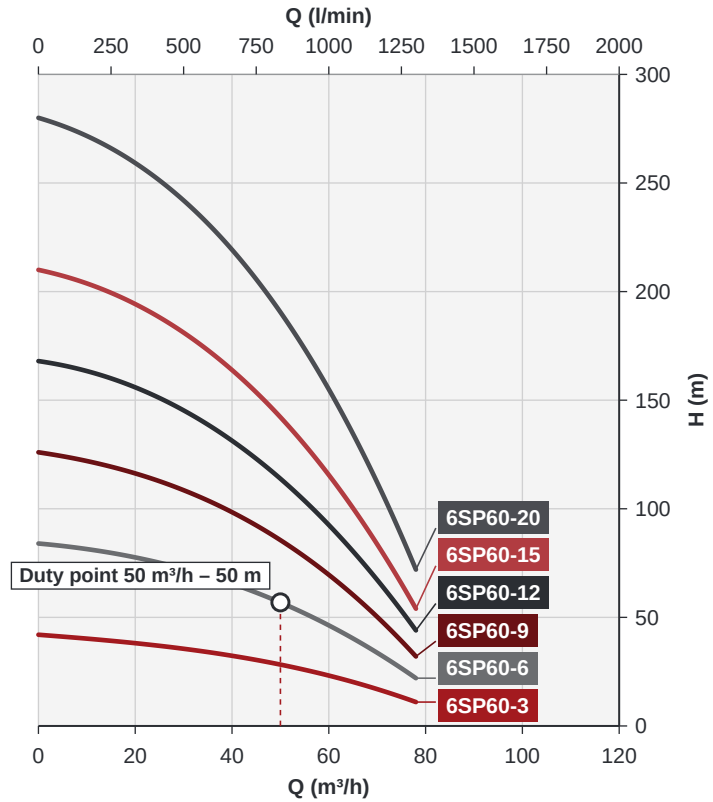



Curves at 50 Hz, 2 poles (≈ 2850 $min^{-1}$), clean water at 20 °C, kinematic viscosity 1 $mm^2/s$. Typical values, not guaranteed.

# 2

# Curves, efficiency and duty points


Group C, pump efficiency curve of the 6SP60 range and the two duty points.

## GROUP C

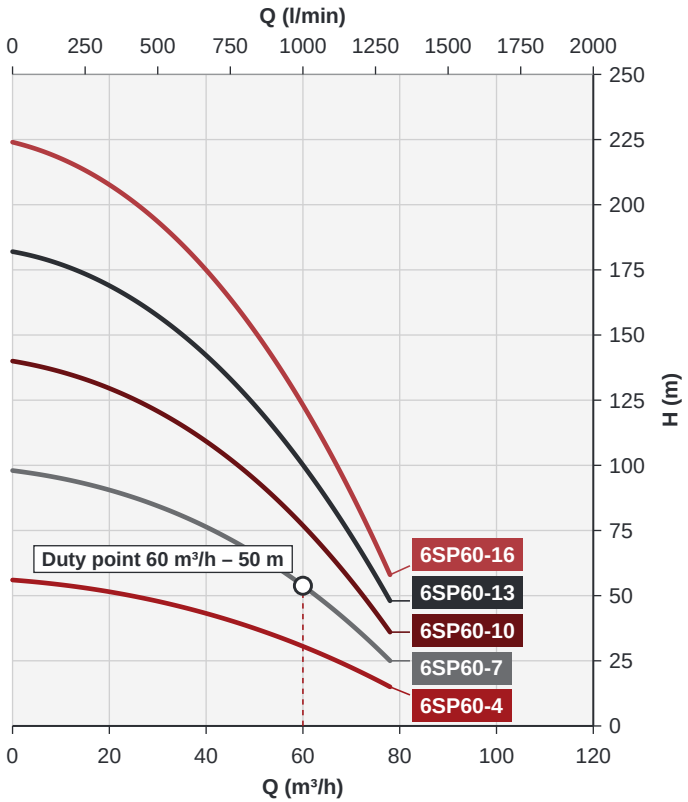


Curves at 50 Hz, 2 poles (≈ 2850 min$^{-1}$), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

## PUMP EFFICIENCY η

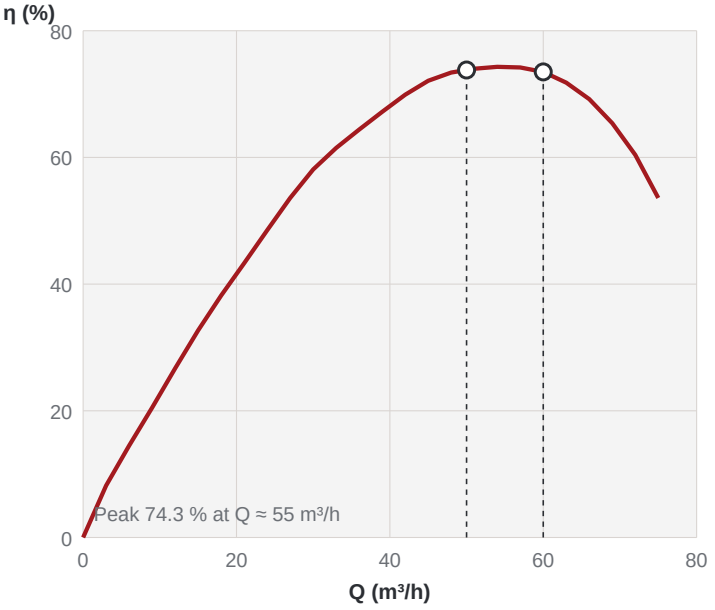


## DUTY POINTS

| Model | Q | H | η pump | P2 |
|---|---|---|---|---|
| **6SP60-6** | 50 m³/h | 56.9 m | 73.8 % | 11 kW / 15 HP |
| **6SP60-7** | 60 m³/h | 53.8 m | 73.5 % | 13 kW / 17.5 HP |

H read on the performance curve; η read on the pump efficiency curve of the 6SP60 range (pump only, without motor). Curves at 50 Hz, 2 poles, n ≈ 2850 /min, clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

# 3

# Performance data

Three-phase 3~ 380–415 V 50 Hz. Q in m³/h and l/min, H in m.

## PERFORMANCE DATA · 6SP60

| Model 3~ | P2 | P2 | Q (m³/h) | 0 | 6 | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54 | 60 | 66 | 72 | 78 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | kW | HP | Q (l/min) | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 |
| **6SP60-2** | 4 | 5.5 | | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 19 | 18 | 16 | 14 | 11 | 8 |
| **6SP60-3** | 5.5 | 7.5 | | 42 | 41 | 40 | 39 | 38 | 36 | 33 | 31 | 29 | 26 | 23 | 20 | 16 | 11 |
| **6SP60-4** | 7.5 | 10 | | 56 | 55 | 54 | 53 | 52 | 48 | 44 | 41 | 38 | 35 | 31 | 26 | 21 | 15 |
| **6SP60-5** | 9.2 | 12.5 | | 70 | 69 | 68 | 67 | 65 | 60 | 55 | 52 | 48 | 44 | 39 | 33 | 26 | 18 |
| **6SP60-6** | 11 | 15 | | 84 | 83 | 82 | 81 | 78 | 72 | 66 | 62 | 58 | 53 | 47 | 40 | 31 | 22 |
| **6SP60-7** | 13 | 17.5 | | 98 | 97 | 96 | 95 | 91 | 84 | 77 | 72 | 67 | 62 | 55 | 46 | 36 | 25 |
| **6SP60-8** | 15 | 20 | | 112 | 111 | 110 | 109 | 104 | 96 | 89 | 83 | 77 | 71 | 63 | 53 | 42 | 29 |
| **6SP60-9** | 18.5 | 25 | | 126 | 125 | 124 | 122 | 116 | 108 | 100 | 93 | 86 | 80 | 70 | 60 | 47 | 32 |
| **6SP60-10** | 18.5 | 25 | **H (m)** | 140 | 139 | 138 | 136 | 129 | 120 | 111 | 103 | 96 | 88 | 78 | 66 | 52 | 36 |
| **6SP60-11** | 22 | 30 | | 154 | 153 | 152 | 150 | 142 | 132 | 122 | 114 | 106 | 97 | 86 | 73 | 57 | 40 |
| **6SP60-12** | 22 | 30 | | 168 | 167 | 166 | 164 | 155 | 144 | 133 | 124 | 116 | 106 | 94 | 80 | 62 | 44 |
| **6SP60-13** | 26 | 35 | | 182 | 181 | 180 | 178 | 168 | 156 | 144 | 134 | 126 | 114 | 102 | 86 | 68 | 48 |
| **6SP60-14** | 26 | 35 | | 196 | 195 | 194 | 191 | 181 | 168 | 155 | 144 | 135 | 123 | 109 | 93 | 73 | 51 |
| **6SP60-15** | 26 | 35 | | 210 | 209 | 208 | 204 | 194 | 180 | 166 | 154 | 144 | 132 | 117 | 100 | 78 | 54 |
| **6SP60-16** | 30 | 40 | | 224 | 223 | 222 | 218 | 207 | 192 | 177 | 165 | 154 | 141 | 125 | 106 | 83 | 58 |
| **6SP60-18** | 37 | 50 | | 252 | 251 | 250 | 245 | 233 | 216 | 199 | 186 | 173 | 159 | 141 | 119 | 93 | 65 |
| **6SP60-20** | 37 | 50 | | 280 | 279 | 278 | 273 | 259 | 240 | 221 | 206 | 193 | 176 | 159 | 135 | 103 | 72 |

Curves on pages 2–3 are drawn as smooth curves through the table values (deviation ≤ 4.0 %); maximum head (Q = 0) and the last point of each curve are kept exactly.

# 4

# Dimensions and motor data

Outlet 3 in. Dimensions in mm: P pump, M motor, T total length.

## DIMENSIONS · 6SP60 · OUTLET 3 in

| Model | kW | HP | P (mm) | M (mm) | T (mm) |
|---|---|---|---|---|---|
| **6SP60-2** | 4 | 5.5 | 498 | 524 | 1022 |
| **6SP60-3** | 5.5 | 7.5 | 611 | 574 | 1185 |
| **6SP60-4** | 7.5 | 10 | 724 | 639 | 1363 |
| **6SP60-5** | 9.2 | 12.5 | 837 | 699 | 1536 |
| **6SP60-6** | 11 | 15 | 950 | 764 | 1714 |
| **6SP60-7** | 13 | 17.5 | 1063 | 824 | 1887 |
| **6SP60-8** | 15 | 20 | 1176 | 884 | 2060 |
| **6SP60-9** | 18.5 | 25 | 1298 | 909 | 2207 |
| **6SP60-10** | 18.5 | 25 | 1420 | 909 | 2329 |
| **6SP60-11** | 22 | 30 | 1524 | 984 | 2508 |
| **6SP60-12** | 22 | 30 | 1628 | 984 | 2612 |
| **6SP60-13** | 26 | 35 | 1741 | 1059 | 2800 |
| **6SP60-14** | 26 | 35 | 1854 | 1059 | 2913 |
| **6SP60-15** | 26 | 35 | 1967 | 1059 | 3026 |
| **6SP60-16** | 30 | 40 | 2080 | 1134 | 3214 |
| **6SP60-18** | 37 | 50 | 2306 | 1208 | 3514 |
| **6SP60-20** | 37 | 50 | 2532 | 1208 | 3740 |

## MOTOR DATA

| Item | Value |
|---|---|
| **Power supply** | 3~ 380–415 V 50 Hz |
| **Speed** | n ≈ 2850 /min |
| **Start** | Direct or star-delta |
| **Motor** | Rewindable |
| **Outlet** | 3 in |
| **Min. well diameter** | 6 in |

## WORKING LIMITS

- Maximum fluid temperature: 50 °C
- Maximum sand content: 0.25%
- Minimum well diameter: 6 in