perotac


MADE IN TAIWAN





PROFESSIONAL MANUFACTURER OF
VORTEX AIR PUMP/BLOWER PUMP/ RING BLOWER

OPERATING PRINCIPLE

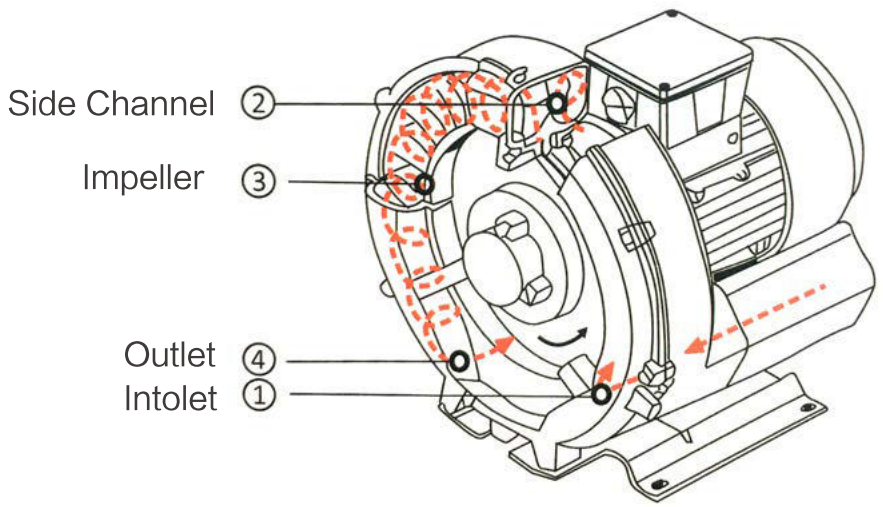


The impellers are mounted directly on the motor shaft for noncontact compression entirely without friction.Maximun operational reliability,even at high differential is ensured by the arrangement of the bearings outside the compression chamber.

The gas it taken in though the inlet1.As it enters the side channel 2,the rotating impeller 3 imparts velocity to the gas in direction of rotation.centrifugal force in the impeller blades accelerates the gas outward and the pressure increase.Every rotation adds kinetic energy.

Resulting in the further increase of the pressure along the side channel.The side channel narrow at the rotor,sweeping the gas off the impeller blades and dischargring it though the outlet silencer 4 where it exits the side channel blower.

VORTEX AIR PUMP EXPLOSIVE VIEW

perotac
MADE IN TAIWAN

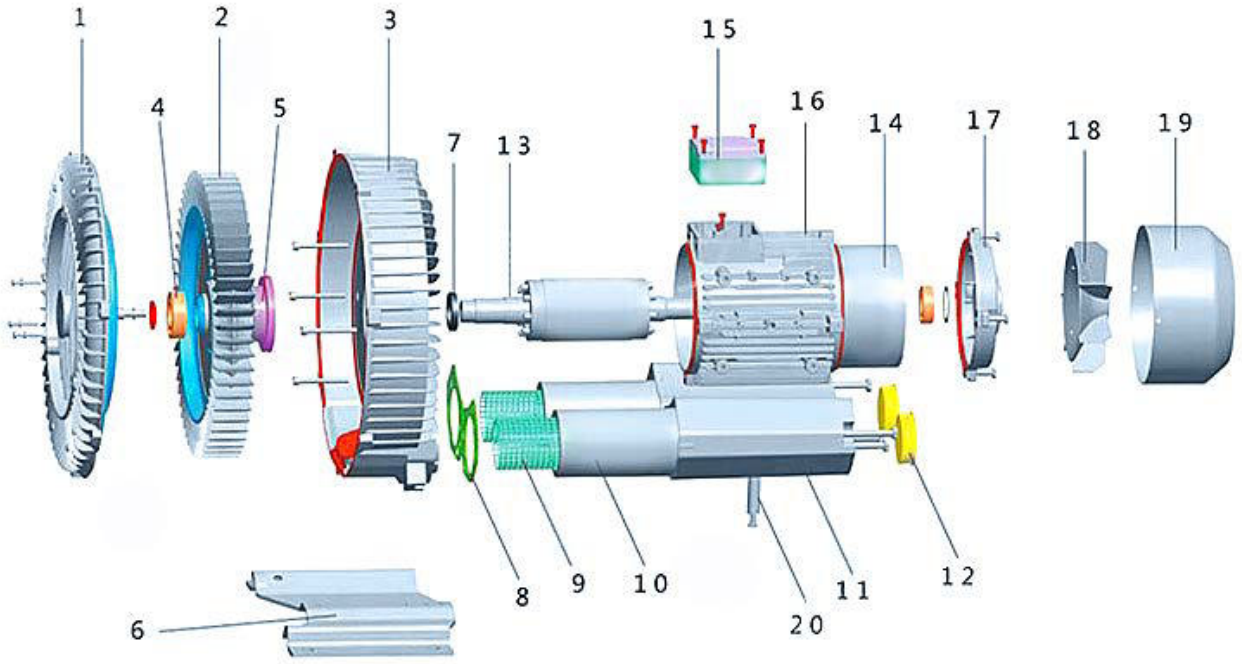

1、Pump Cover
2、Impeller
3、Pump Body
4、Bearing
5、Bearing Seat
6、Base plate
7、Oil seal
8、Gasket
9、Silencer net
10、Silencer sponge
11、Silencer pipe
12、Connector(flange)
13、Rotor
14、Motor
15、Terminal box
16、Motor housing
17、Motor end cover
18、Motor fan
19、Motor back cover
20、Supporting tube

HIGH PRESSURE VORTEX AIR PUMP

perotac
MADE IN TAIWAN

GB-250
GB-370






Model	Rated voltage	Rated current	Frequency	Max.pressure	Max.flow	Max.vacuum	power	Speed	Noise	N.W	G.W	Packing volume
	V	A	HZ	Kpa	m^3/h	Kpa	KW	r/min	dB	KG	KG	CM
GB-250	220	2.5(3.0)	50(60)	12(14)	48(57)	8.5(10)	0.25(0.30)	2800(3400)	<56	10.6	11.2	31x28x28
GB-370	220	3.5(4.2)	50(60)	16(19)	60(70)	11(13)	0.37(0.44)	2800(3400)	<56	11	11.7	31x28x28


GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)

GB-250


50HZ 0.25KW 60HZ 0.30KW

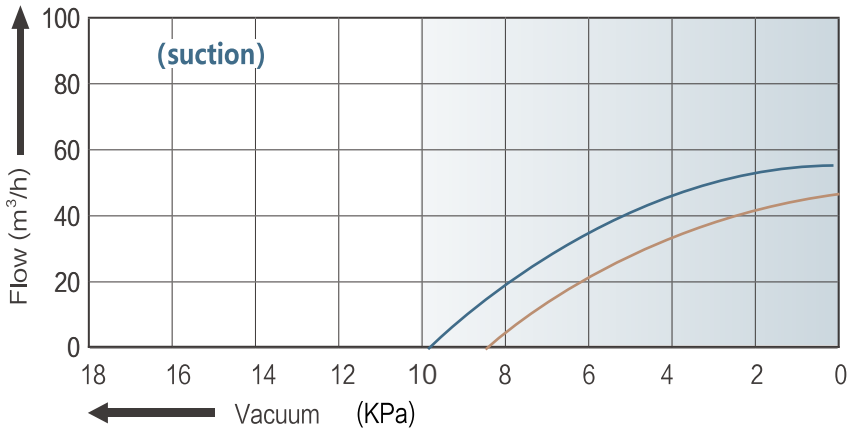


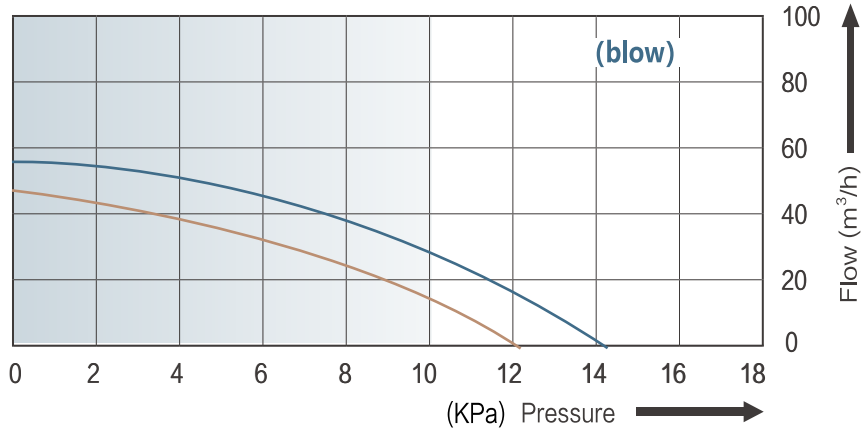

GB-370

50HZ 0.37KW 60HZ 0.44KW

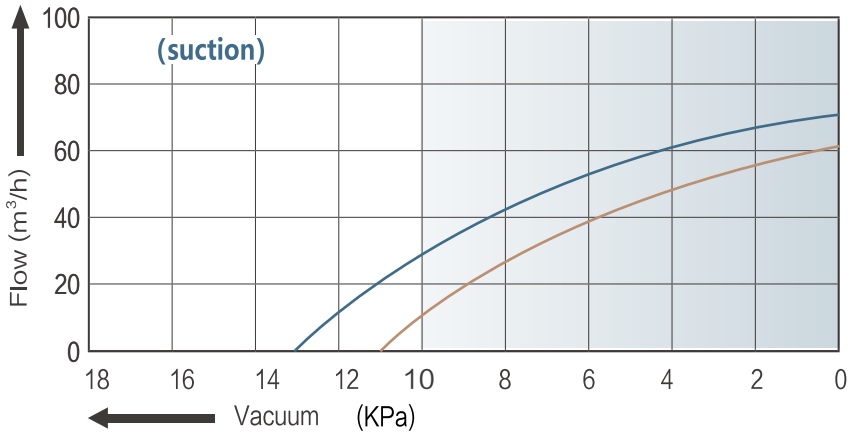

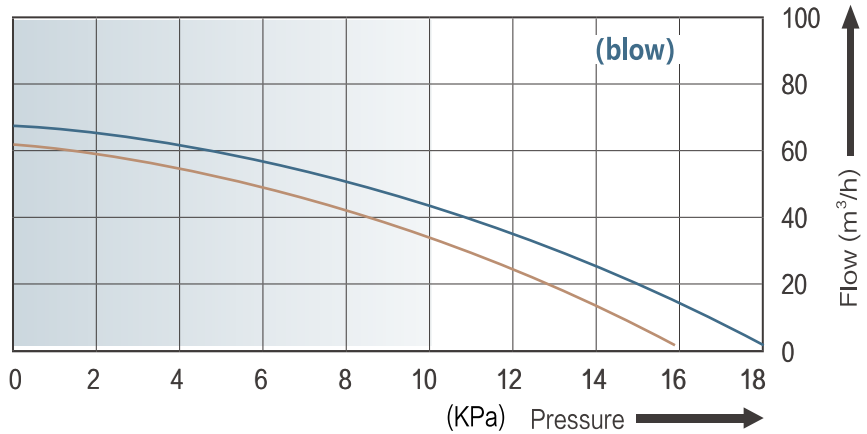

HIGH PRESSURE VORTEX AIR PUMP

perotac
MADE IN TAIWAN

GB-550
GB-750






Model	Rated voltage	Rated current	Frequency	Max.pressure	Max.flow	Max.vacuum	power	Speed	Noise	N.W	G.W	Packing volume
	V	A	HZ	Kpa	m^3/h	Kpa	KW	r/min	dB	KG	KG	CM
GB-550	220	4.8(5.76)	50(60)	20(24)	110(132)	16(19)	0.55(0.66)	2800(3400)	<60	12.6	14.1	32x31x30
GB-550S	△ 220 Y380	2.51(3.01) 1.45(1.74)	50(60)	20(24)	110(132)	16(19)	0.55(0.66)	2800(3400)	<60	12	13.5	32x31x30
GB-750	220	6.3(7.56)	50(60)	22(25)	145(170)	18(20)	0.75(0.90)	2800(3400)	<60	16.5	18	35x32x33
GB-750S	△ 220 Y380	3.31(4.10) 1.81(2.37)	50(60)	22(25)	145(170)	18(20)	0.75(0.90)	2800(3400)	<60	16	17.5	35x32x33


GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)

GB-550


50HZ 0.55KW 60HZ 0.66KW

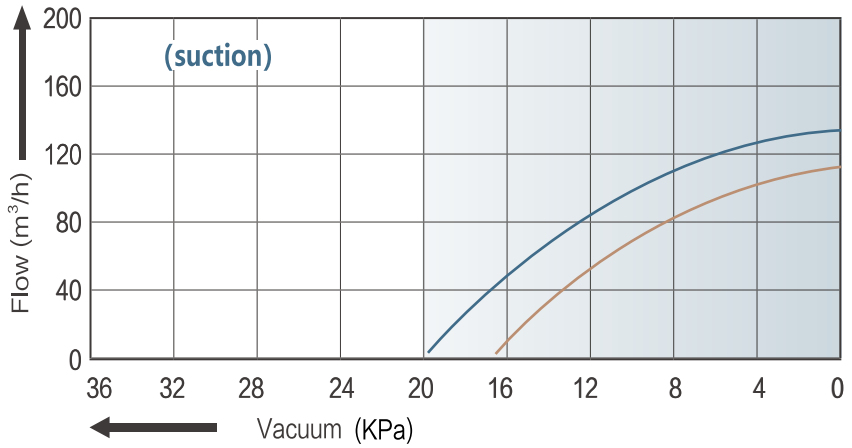


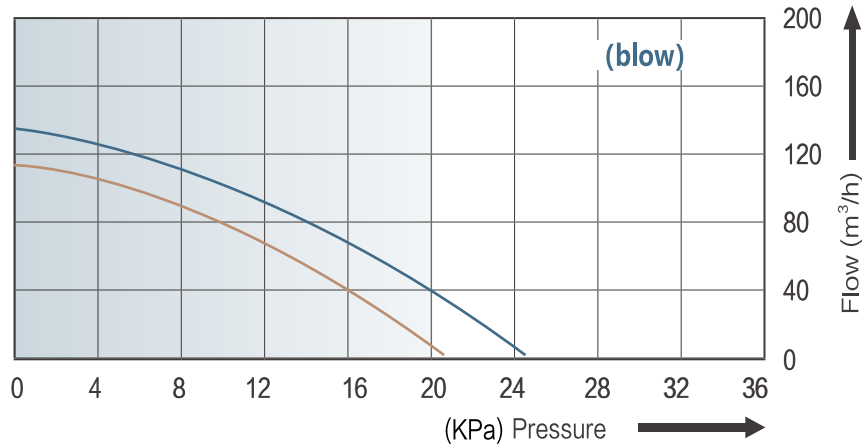

GB-750

50HZ 0.75KW 60HZ 0.90KW

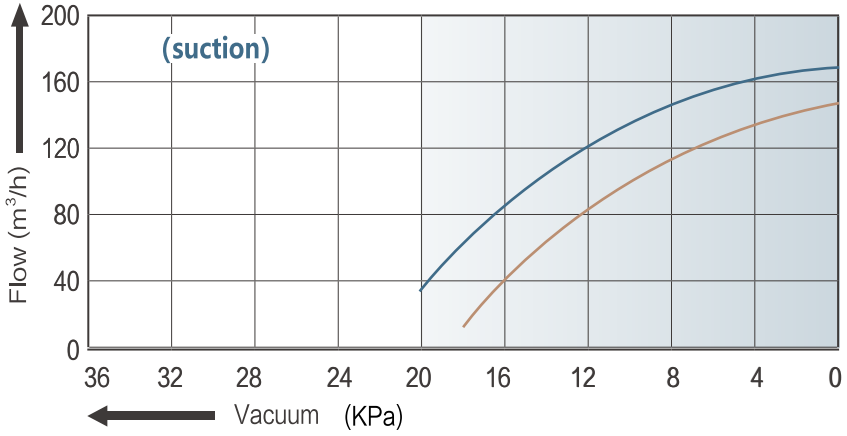

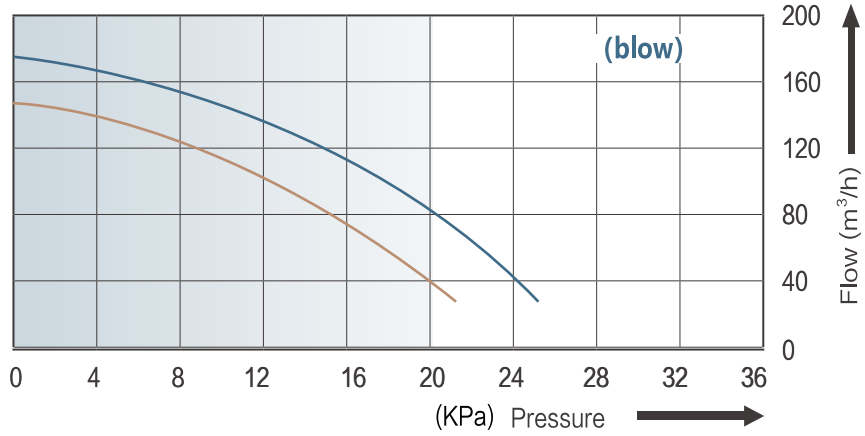

perotac
MADE IN TAIWAN

HIGH PRESSURE VORTEX AIR PUMP

GB-1100
GB-1500






Model	Rated voltage	Rated current	Frequency	Max.pressure	Max.flow	Max.vacuum	power	Speed	Noise	N.W	G.W	Packing volume
	V	A	HZ	Kpa	m^3/h	Kpa	KW	r/min	dB	KG	KG	CM
GB-1100	220	8.7(10.44)	50(60)	25(30)	210(245)	20(24)	1.1(1.3)	2800(3400)	<60	23	24.7	37x37x38
GB-1100S	△ 220 Y380	4.36(5.88) 2.52(3.42)	50(60)	25(30)	210(245)	20(24)	1.1(1.3)	2800(3400)	<60	21.5	22.9	37x37x38
GB-1500	220	11.8(14.16)	50(60)	26(31)	220(255)	21(25)	1.5(1.8)	2800(3400)	<60	23.4	28	37x37x38
GB-1500S	△ 220 Y380	5.96(8.20) 3.44(4.74)	50(60)	26(31)	220(255)	21(25)	1.5(1.8)	2800(3400)	<60	22.5	26	37x37x38


GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)

GB-1100


50HZ 1.1KW 60HZ 1.3KW

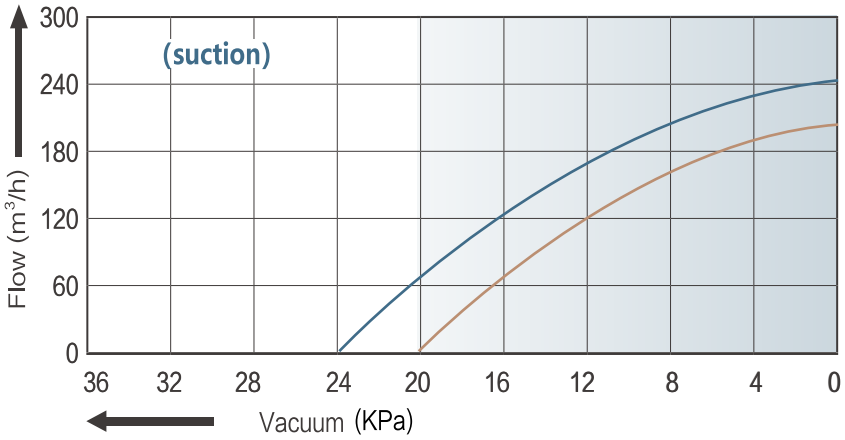


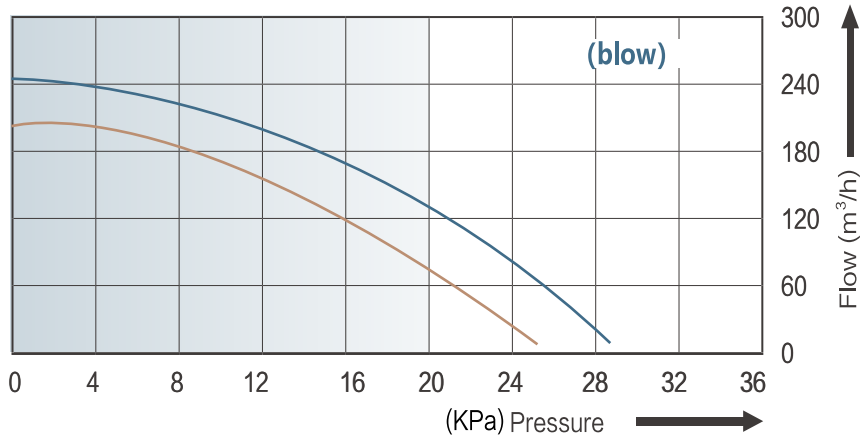

GB-1500

50HZ 1.5KW 60HZ 1.8KW

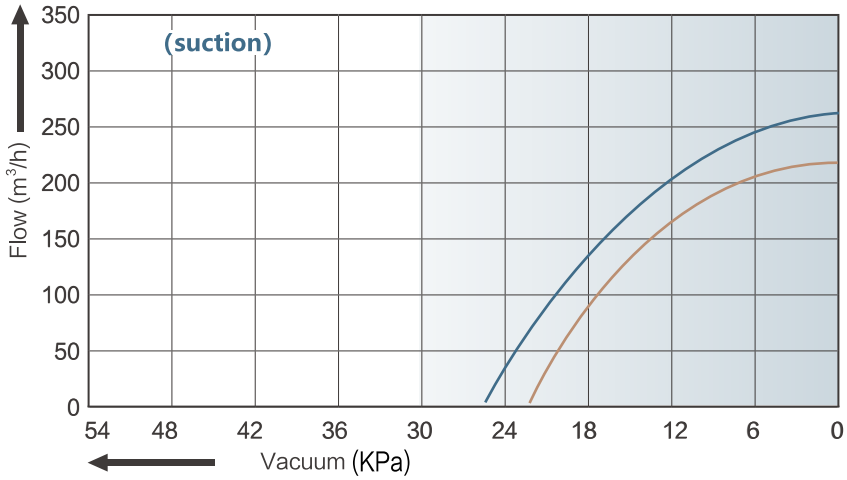

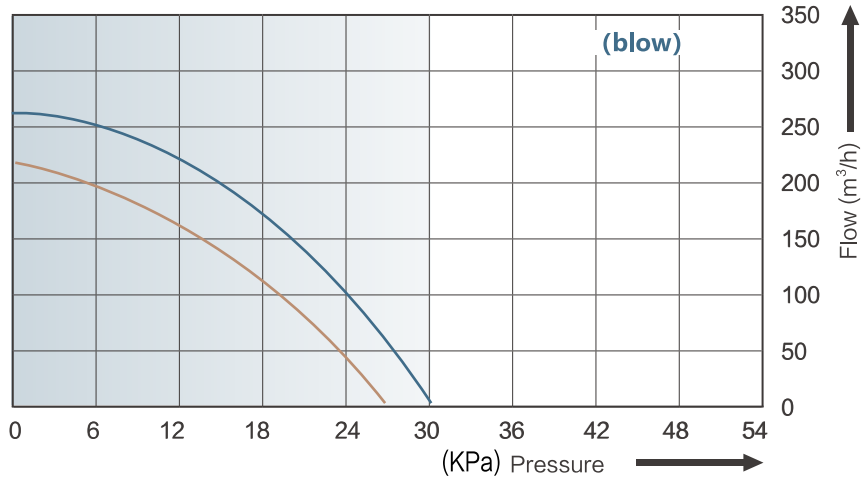

perotac
MADE IN TAIWAN

HIGH PRESSURE VORTEX AIR PUMP

GB-2200






Model	Rated voltage	Rated current	Frequency	Max.pressure	Max.flow	Max.vacuum	power	Speed	Noise	N.W	G.W	Packing volume
	V	A	HZ	Kpa	m^3/h	Kpa	KW	r/min	dB	KG	KG	CM
GB-2200	220	14.8(17.7)	50(60)	36(43)	325(365)	28(33)	2.2(2.6)	2800(3400)	<70	29	31.5	42x42x42
GB-2200S	△ 220 Y380	8.52(10.22) 4.92(5.91)	50(60)	36(43)	325(365)	28(33)	2.2(2.6)	2800(3400)	<70	29	31.5	42x42x42

GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)

GB-2200

● 50HZ 2.2KW ● 60HZ 2.6KW

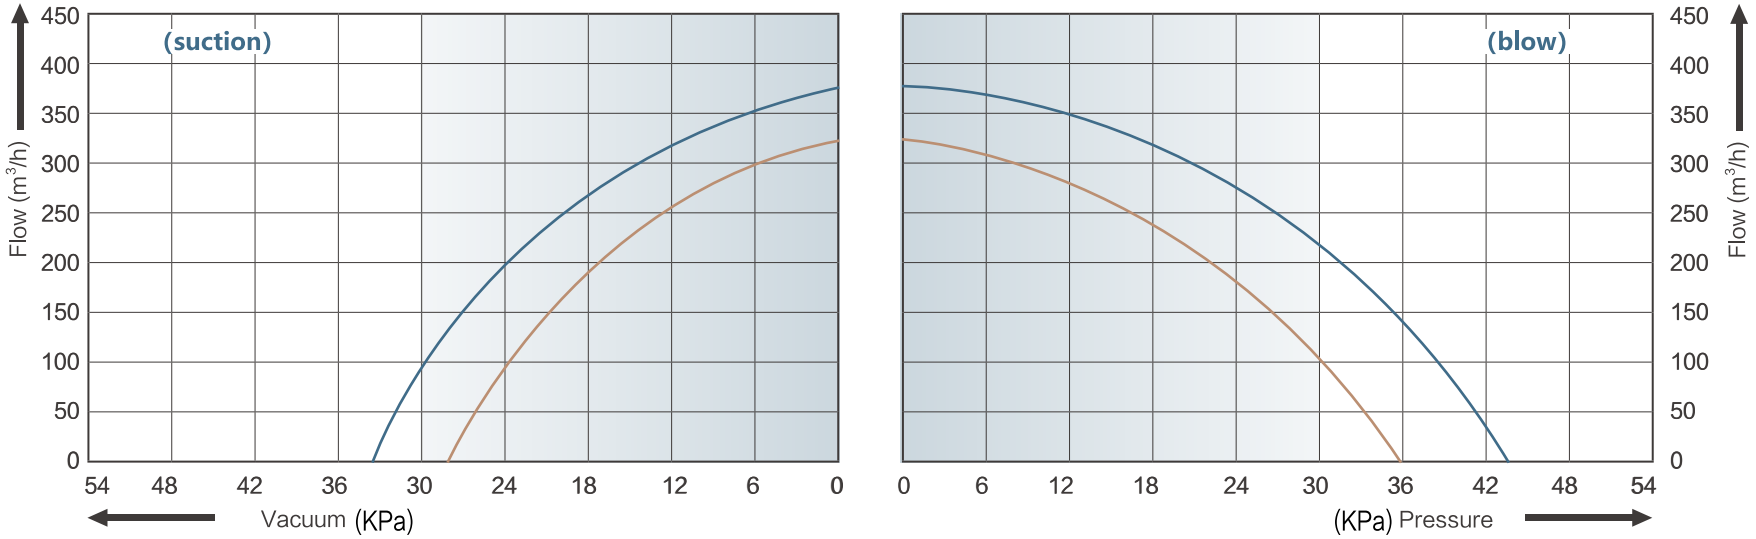

perotac
MADE IN TAIWAN

HIGH PRESSURE VORTEX AIR PUMP

GB-3000
GB-4000






Model	Rated voltage	Rated current	Frequency	Max.pressure	Max.flow	Max.vacuum	power	Speed	Noise	N.W	G.W	Packing volume
	V	A	HZ	Kpa	m^3/h	Kpa	KW	r/min	dB	KG	KG	CM
GB-3000S	△ 220 Y380	11.07(13.29) 6.39(7.67)	50(60)	37(44)	390(435)	29(34)	3.0(3.6)	2800(3400)	<70	44	51	46x46x50
GB-4000S	△ 380 Y660	8.17(9.8) 4.72(5.6)	50(60)	38(45)	475(525)	30(35)	4.0(4.8)	2800(3400)	<70	47	54	46x46x50


GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)

GB-3000


50HZ 3.0KW　60HZ 3.6KW

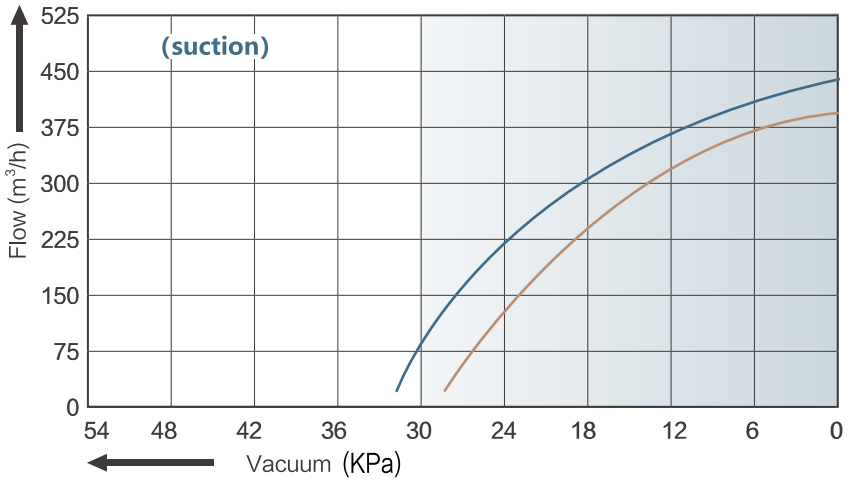


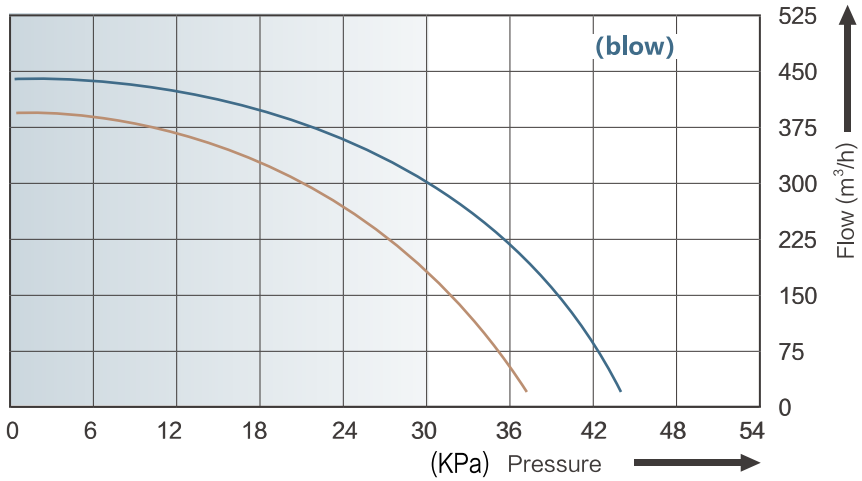

GB-4000

50HZ 4.0KW　60HZ 4.8KW

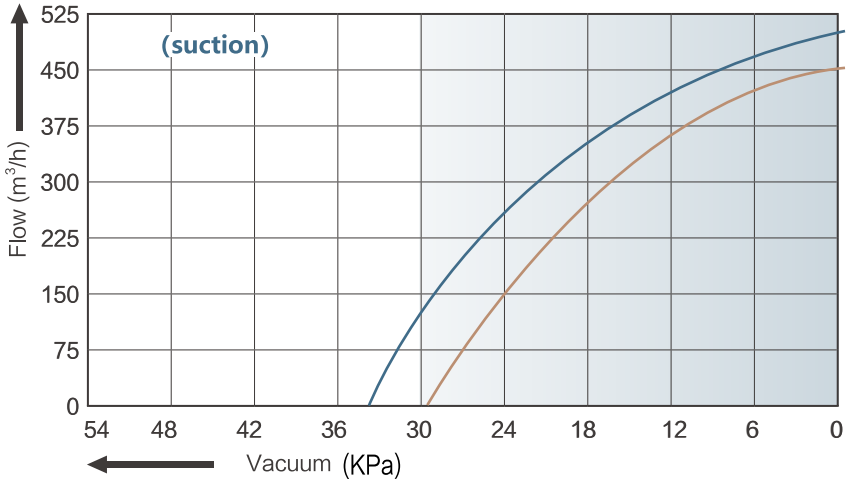

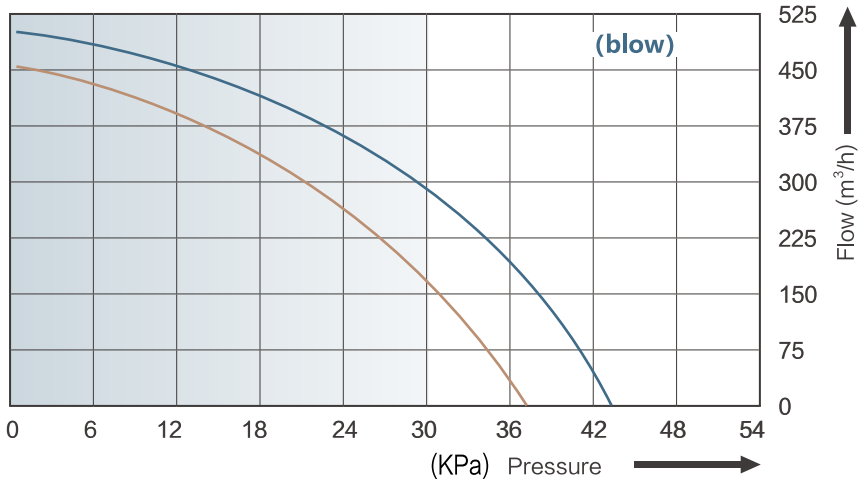

perotac
MADE IN TAIWAN

HIGH PRESSURE VORTEX AIR PUMP

GB-5500
GB-7500






Model	Rated voltage	Rated current	Frequency	Max.pressure	Max.flow	Max.vacuum	power	Speed	Noise	N.W	G.W	Packing volume
	V	A	HZ	Kpa	m^3/h	Kpa	KW	r/min	dB	KG	KG	CM
GB-5500S	△ 380 Y660	11.1(13.4) 6.4(7.6)	50(60)	42(50)	530(616)	34(38)	5.5(6.6)	2800(3400)	<70	62	71	48x50x52
GB-7500S	△ 380 Y660	15(19.74) 8.6(10.4)	50(60)	45(52)	550(640)	35(42)	7.5(9.0)	2800(3400)	<70	65	74	48x50x52

GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)


GB-5500

50HZ 5.5KW 60HZ 6.6KW

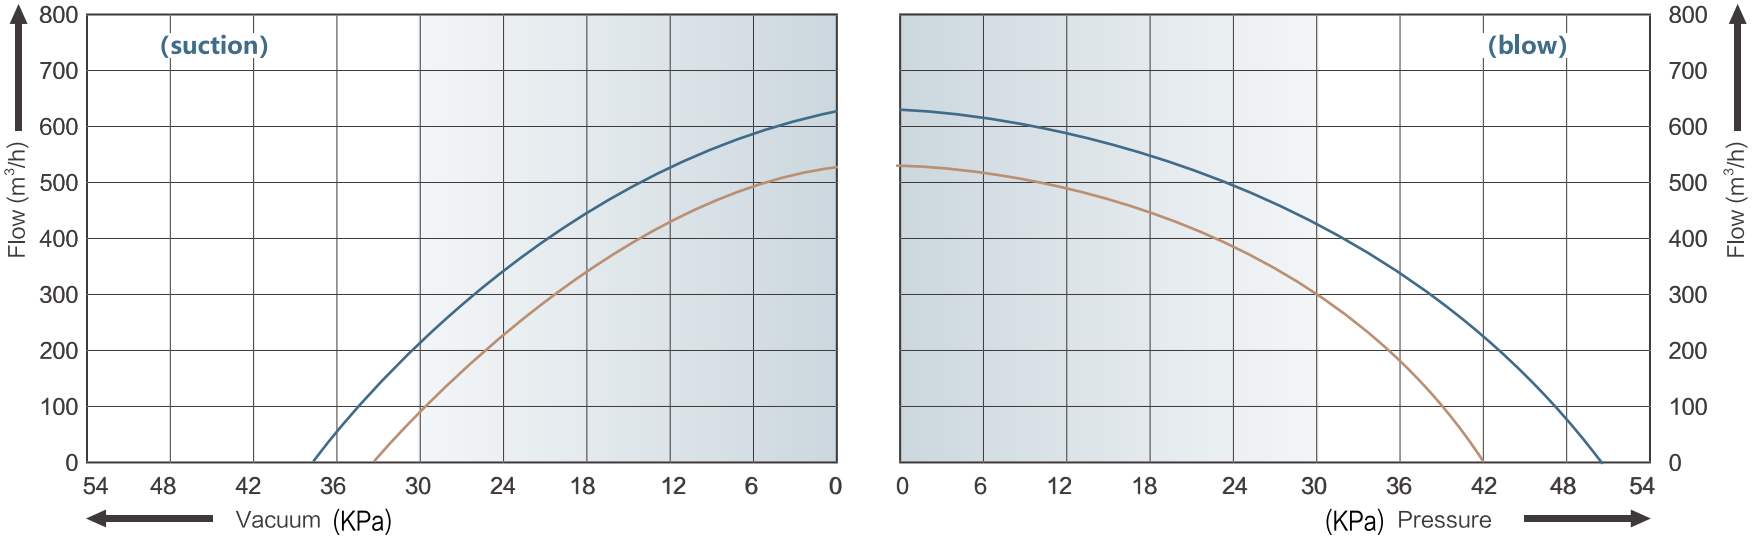

GB-7500

50HZ 7.5KW 60HZ 9.0KW

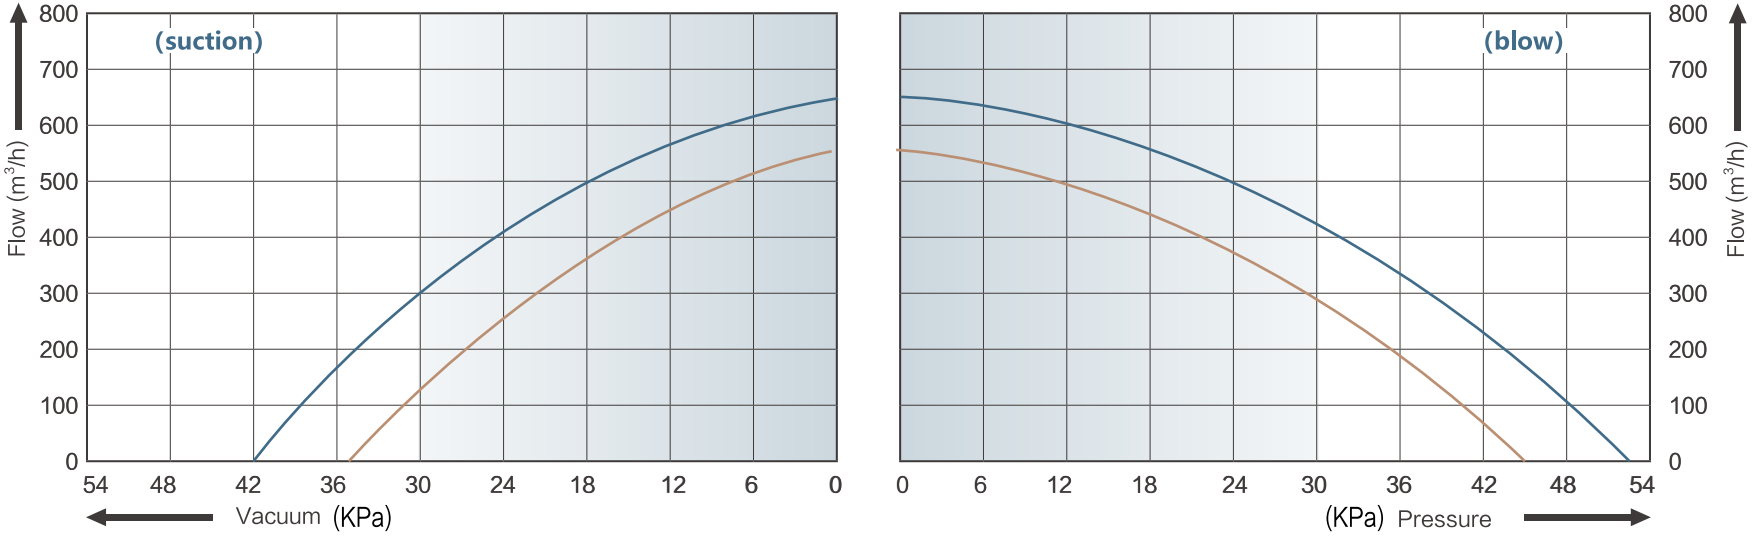

perotac
MADE IN TAIWAN

HIGH PRESSURE VORTEX AIR PUMP

GB-9000
GB-11000
GB-15000
GB-18000






Model	Rated voltage	Rated current	Frequency	Max.pressure	Max.flow	Max.vacuum	power	Speed	Noise	N.W	G.W	Packing volume
	V	A	HZ	Kpa	m^3/h	Kpa	KW	r/min	dB	KG	KG	CM
GB-9000S	△ 380 Y660	18(21) 10.4(12)	50(60)	70(80)	1000(1150)	40(52)	9.0(10.3)	2800(3400)	<70	100	125	69x58x61
GB-11000S	△ 380 Y660	21(24.2) 12.1(14)	50(60)	75(85)	1050(1200)	40(52)	11(12.5)	2800(3400)	<70	120	135	69x58x61
GB-15000S	△ 380 Y660	28(33.5) 16.2(18.6)	50(60)	77(87)	1050(1200)	40(52)	15(17.2)	2800(3400)	<70	125	140	69x58x61
GB-18000S	△ 380 Y660	34(39) 19.6(22.6)	50(60)	79(89)	1050(1200)	40(52)	18(20.7)	2800(3400)	<70	130	145	69x58x61


GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)

GB-9000


50HZ 9.0KW 60HZ 10.3KW

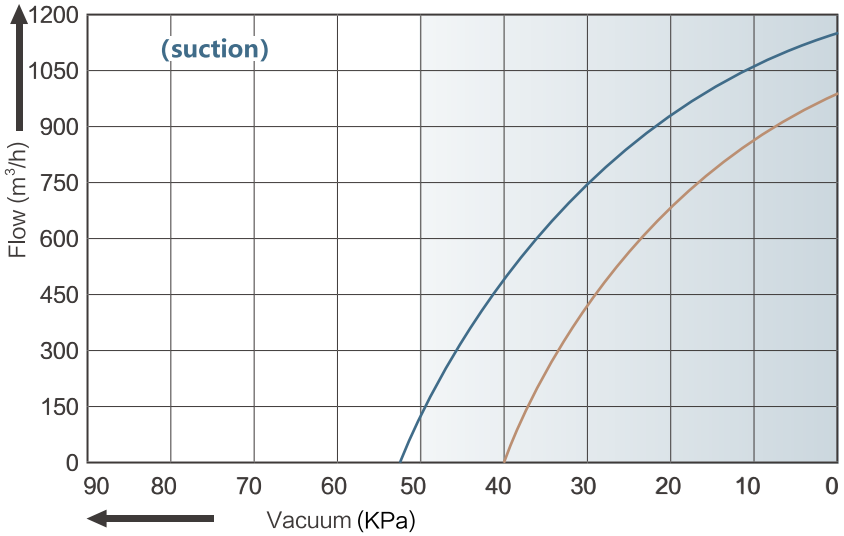


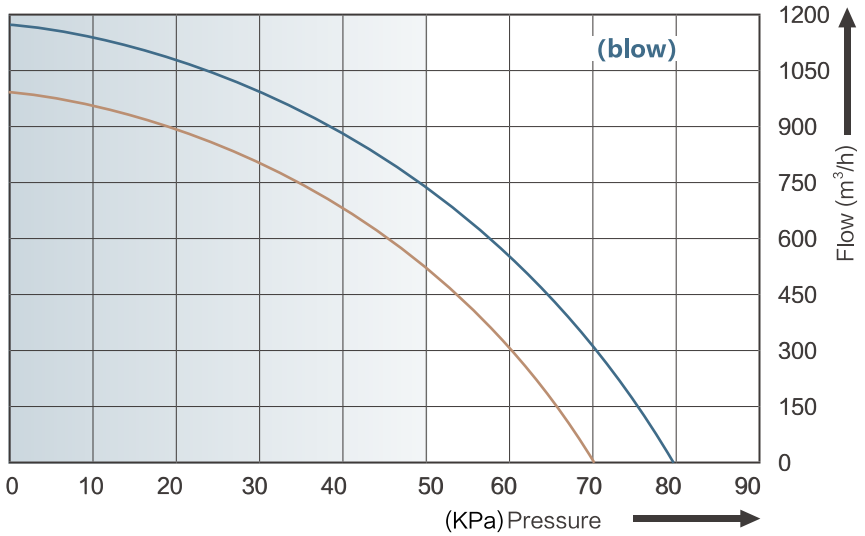

GB-11000

50HZ 11KW 60HZ 12.5KW

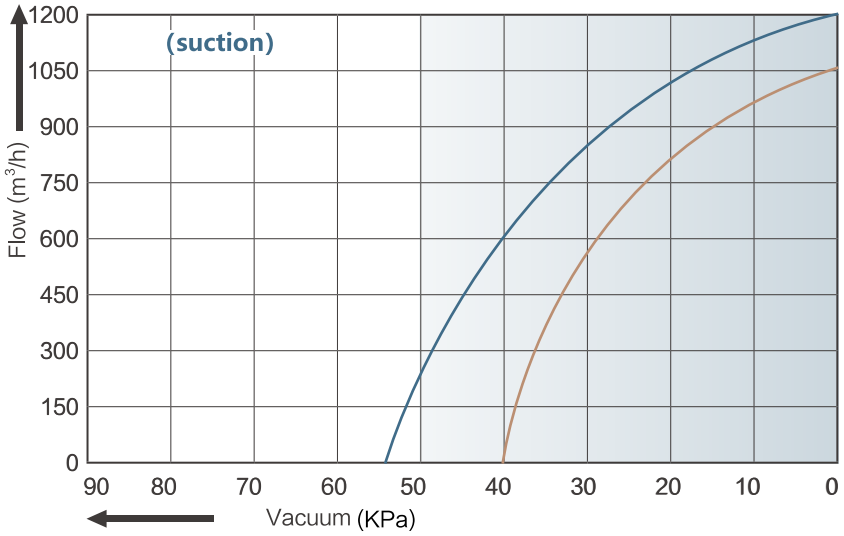

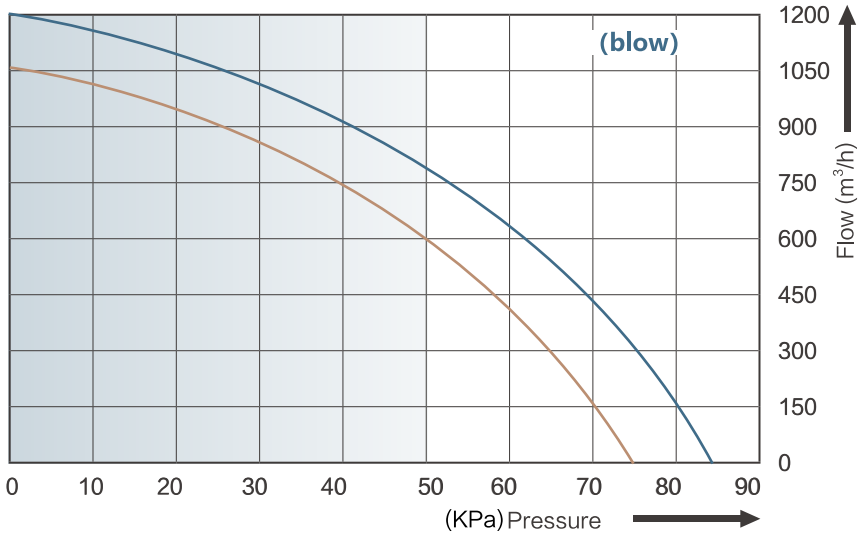


GB

Performance Curve of GB Series Vortex Air pump (for reference only and not for testing basis)


GB-15000

50HZ 15KW 60HZ 17.2KW

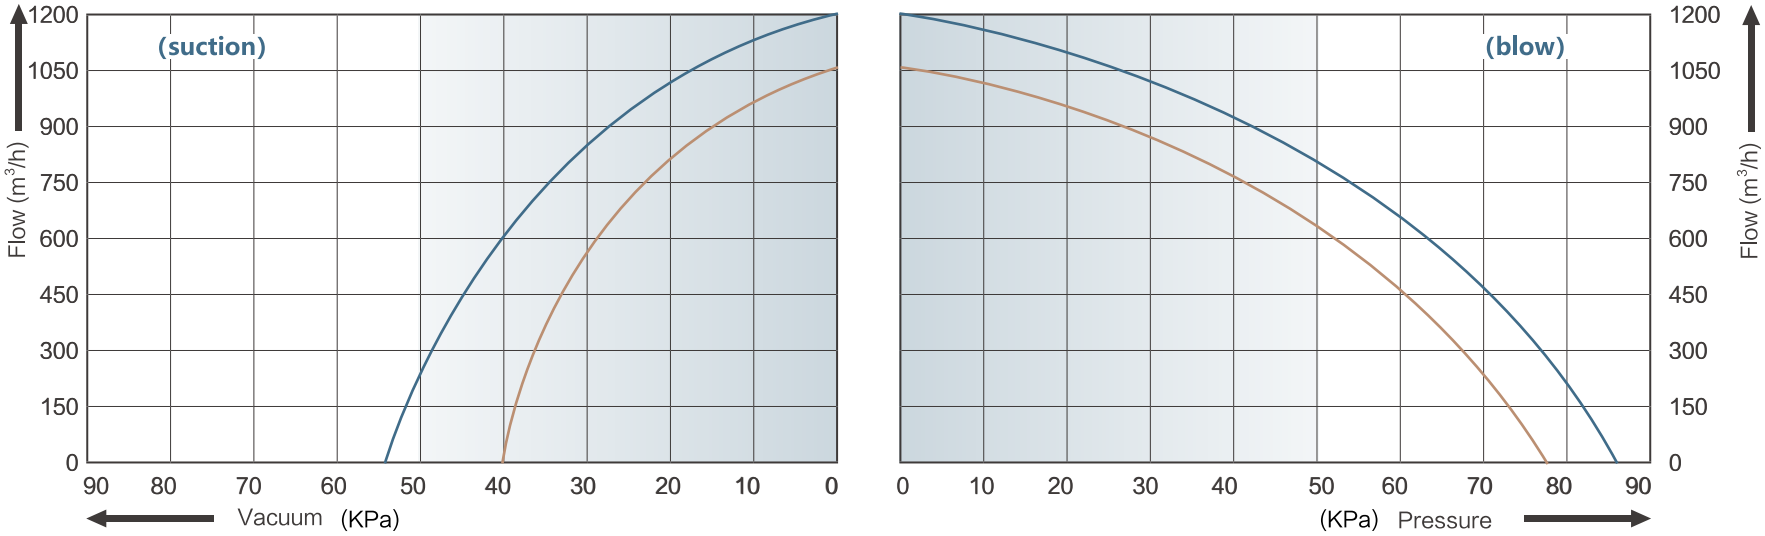


GB-18000


50HZ 18KW 60HZ 20.7KW

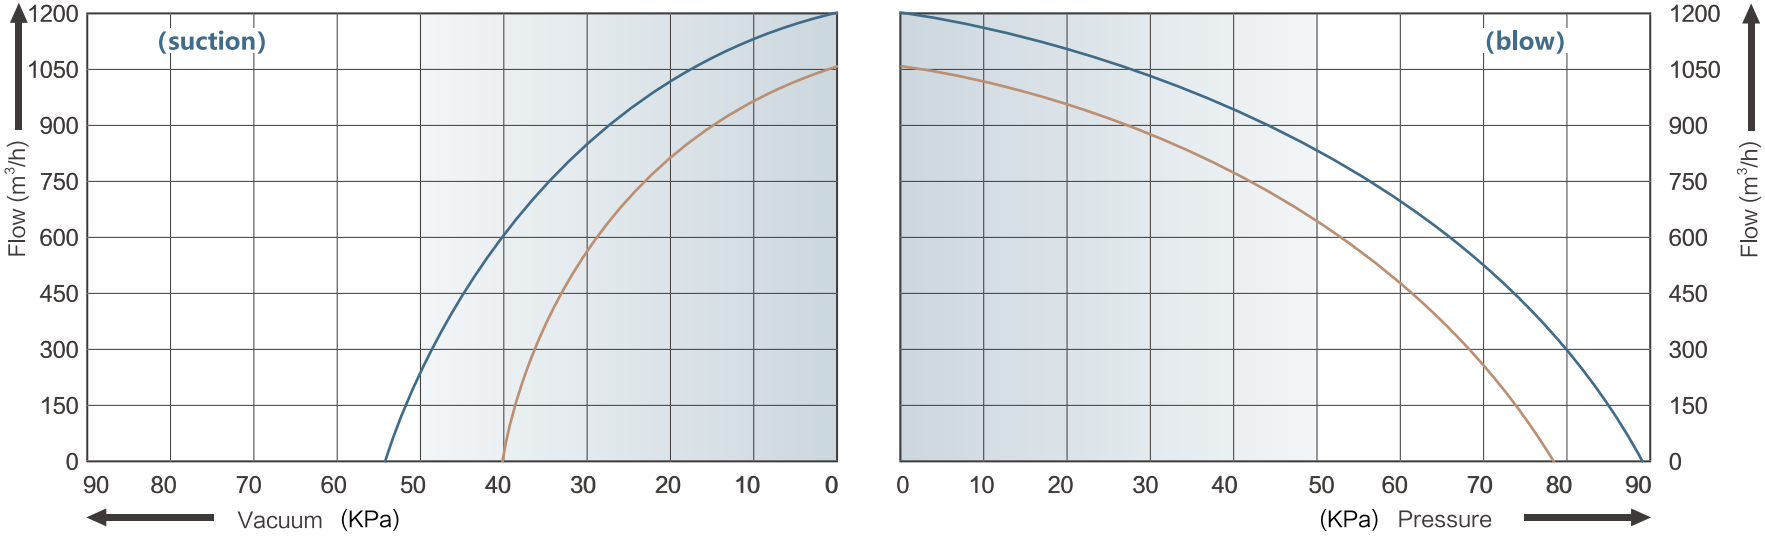

perotac
MADE IN TAIWAN

DIMENSION DIAGRAM

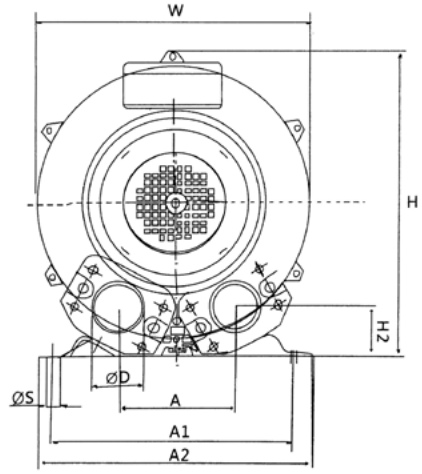

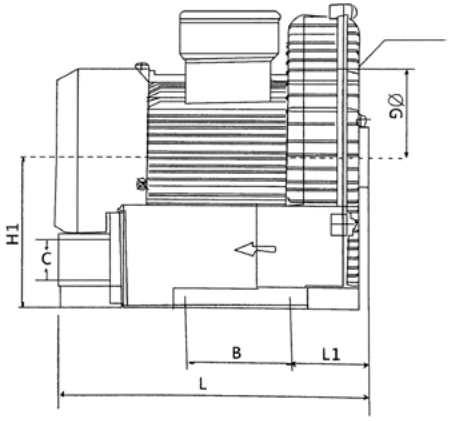

Model	Size													
	L	W	H	H1	H2	A	A1	A2	L1	B	G	D	S	C
GB-250	260	246	247	120	37	90	205	235	62	83	φ140	φ49	8.5	G1 1/4
GB-370	260	246	247	120	37	90	205	235	62	83	φ140	φ49	8.5	G1 1/4
GB-550	277	268	272	155	47	93	205	265	66	83	φ162	φ49	12	G1 1/4
GB-750	300	286	302	165	58	111	225	265	80	95	φ173	φ50	12	G1 1/2
GB-1100	325	335	340	190	61.5	115	270	300	30	140	φ200	φ60	14	G2
GB-1500	325	335	340	190	61.5	115	270	300	30	140	φ200	φ60	14	G2
GB-2200	350	362	365	192	61	120	290	326	95	140	φ246	φ60	14	G2
GB-3000	402	408	410	210	56	140	313	345	103	140	φ256	φ60	14	G2
GB-4000	435	418	470	237	110	143	315	330	113	185	φ280	φ76	14	G2 1/2
GB-5500	475	446	480	250	118	148	360	415	100	170	φ288	φ76	15	G2 1/2
GB-7500	475	446	480	250	118	148	360	415	100	170	φ288	φ76	15	G2 1/2
GB-9000	660	550	570	300	92	207	360	415	89	-	490	φ110	-	G4
GB-11000	660	550	570	300	92	207	360	415	89	-	490	φ110	-	G4
GB-15000	660	550	570	300	92	207	360	415	89	-	490	φ110	-	G4
GB-18000	660	550	570	300	92	207	360	415	89	-	490	φ110	-	G4

perotac
MADE IN TAIWAN

DOUBLE STAGE VORTEX AIR PUMP



0.55 – 0.75 KW



1.1 – 1.5 KW



2.2 – 3 KW



4 – 5.5 KW



7.5 – 9.5 KW



11 – 15 KW

perotac
MADE IN TAIWAN

DOUBLE STAGE VORTEX AIR PUMP

Model	Frequency	power	Rated voltage		Rated current	Max.flow	Max.vacuum	Max.pressure	Noise
	HZ	KW	V		A	m^3/h	Kpa	Kpa	dB
GB-550(S)/2	50	0.55	200-240	345-415	3.8/2.2	88	-24	30	<60
	60	0.66	220-275	380-480	3.75/2.15	100	-27	35	<60
GB-750(S)/2	50	0.75	200-240	345-415	4.2/2.4	88	-25	31	<60
	60	0.9	220-275	380-480	4.0/2.3	100	-28	35	<60
GB-1100(S)/2	50	1.1	200-240	345-415	5.7/3.3	145	-30	37	<60
	60	1.3	220-275	380-480	6.0/3.5	170	-34	45	<60
GB-1500(S)/2	50	1.5	200-240	345-415	7.5/4.3	145	-31	38	<60
	60	1.8	220-275	380-480	7.6/4.4	170	-35	47	<70
GB-2200(S)/2	50	2.2	200-240	345-415	9.7/5.6	220	-39	42	<70
	60	2.6	220-275	380-480	10/5.8	255	-44	49	<70
GB-3000S/2	50	3.0	345-415	600-720	7.2/4.2	220	-43	44	<70
	60	3.6	380-480	660-720	7.5/4.3	255	-47	48	<70
GB-4000S/2	50	4	345-415	600-720	9.0/5.2	325	-42	57	<70
	60	4.8	380-480	660-720	9.4/5.4	360	-47	64	<70
GB-5500S/2	50	5.5	345-415	600-720	13.3/7.7	325	-48	63	<70
	60	6.6	380-480	660-720	13.3/7.7	360	-54	71	<80
GB-7500S/2	50	7.5	345-415	600-720	16.7/9.6	520	-53	68	<80
	60	9.0	380-480	660-720	17.3/10.0	620	-55	70	<80
GB-9500S/2	50	9.5	345-415	600-720	17.3/10.0	520	-55	70	<80
	60	11.4	380-480	660-720	18.0/10.4	620	-57	72	<80
GB-11000S/2	50	11	345-415	600-720	21.5/12.4	560	-55	70	<80
	60	12.6	380-480	660-720	22.0/12.7	650	-57	72	<80
GB-15000S/2	50	15	345-415	600-720	32.5/18.8	560	-57	72	<80
	60	18	380-480	660-720	34.5/19.9	650	-59	74	<80


GB


Perotac MADE IN TAIWAN

Performance Curve of gb Series Vortex Air pump (for reference only and not for testing basis)

GB-550(S)/2


50HZ 0.55KW 60HZ 0.66KW

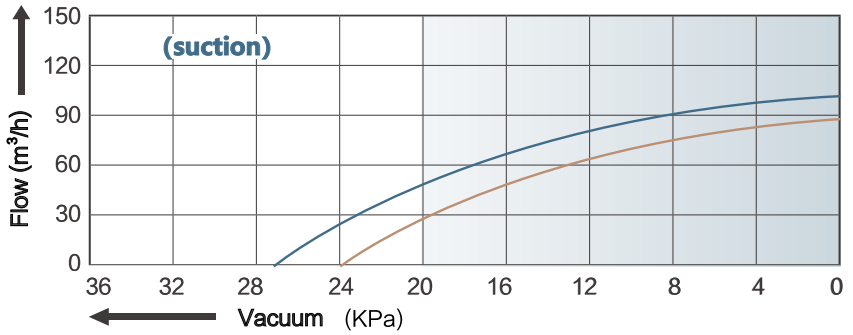


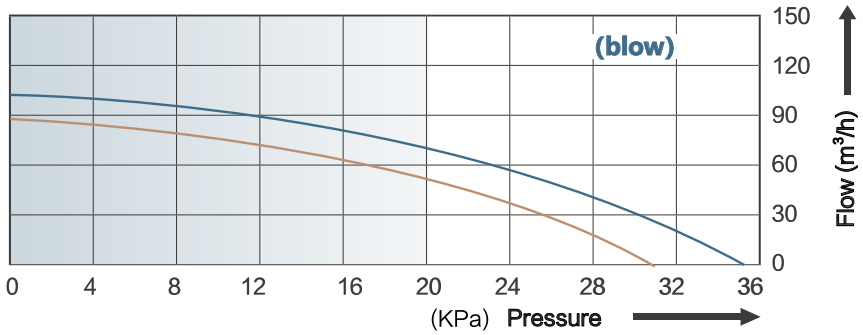

GB-750(S)/2


50HZ 0.75KW 60HZ 0.9KW

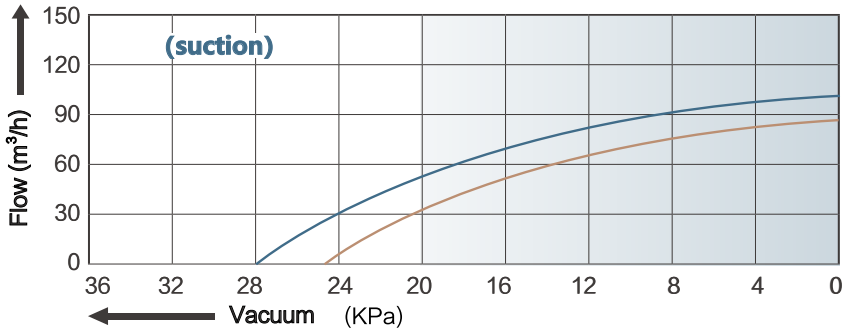


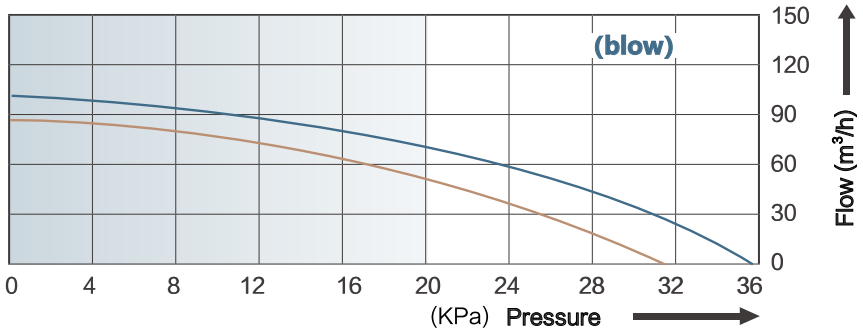

GB-1100(S)/2

50HZ 1.1KW 60HZ 1.3KW

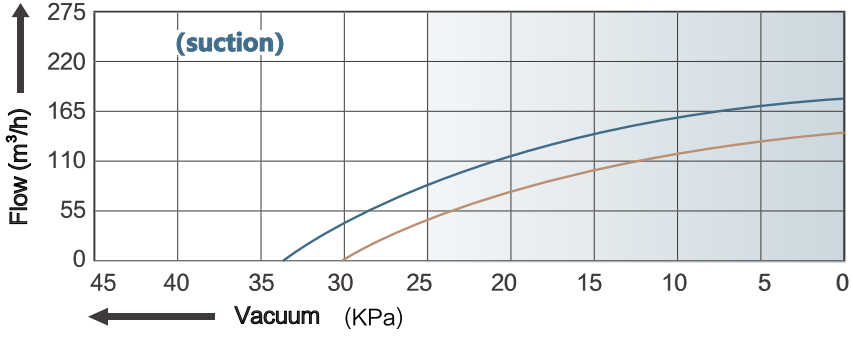

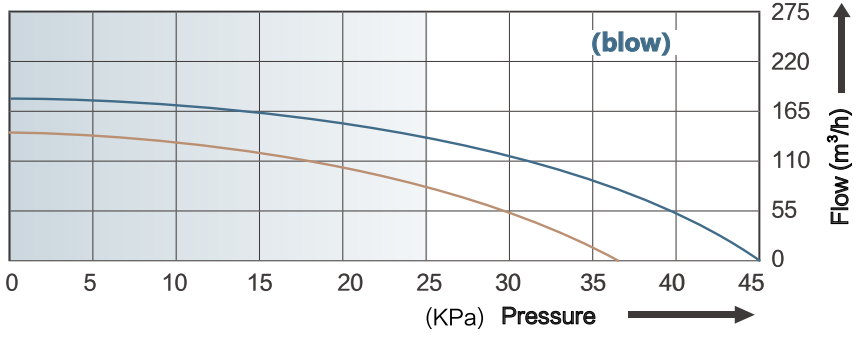


GB


Perotac
MADE IN TAIWAN

Performance Curve of gb Series Vortex Air pump (for reference only and not for testing basis)

GB-1500(S)/2


50HZ 1.5KW 60HZ 1.8KW

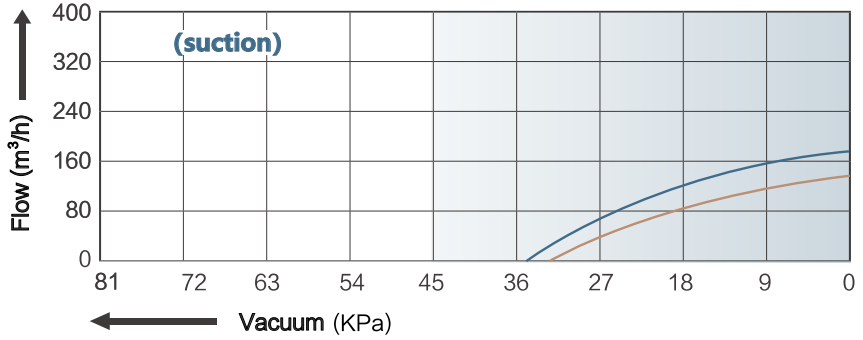


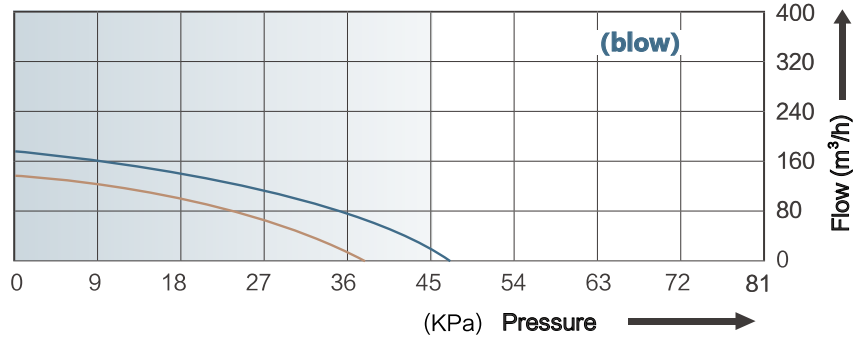

GB-2200(S)/2


50HZ 2.2KW 60HZ 2.6KW

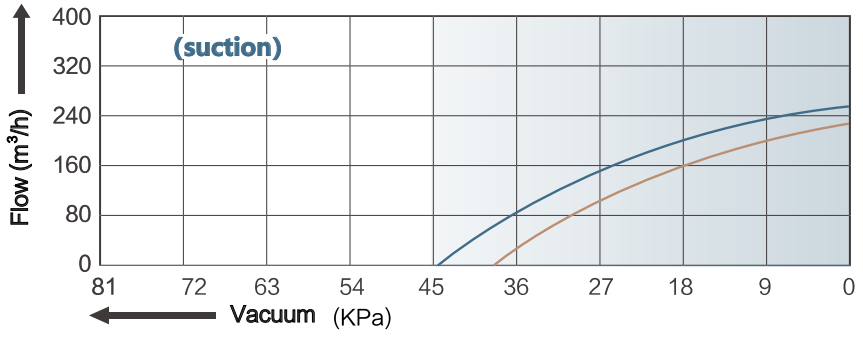


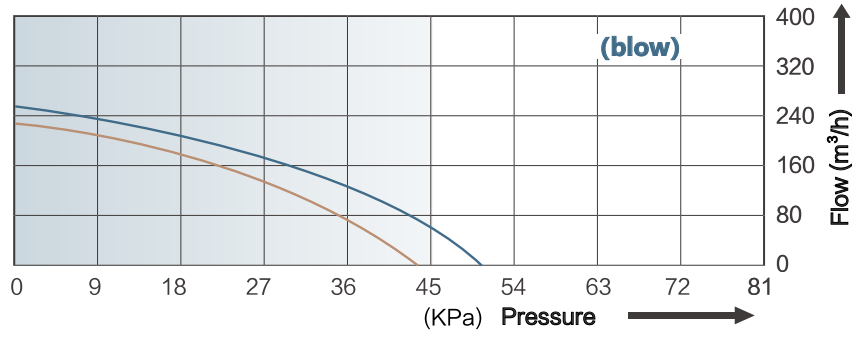

GB-3000S/2

50HZ 3KW 60HZ 3.6KW

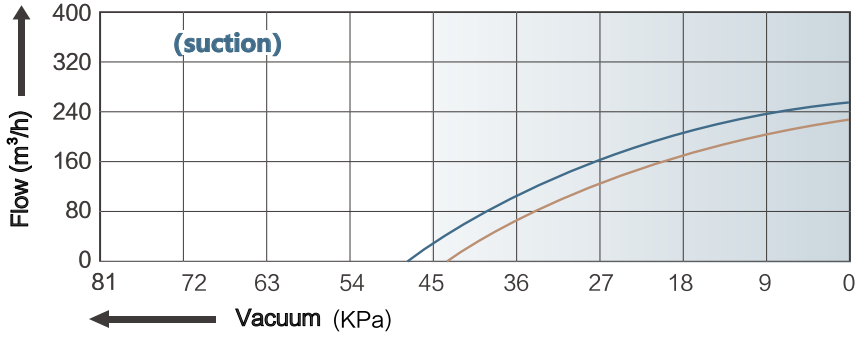

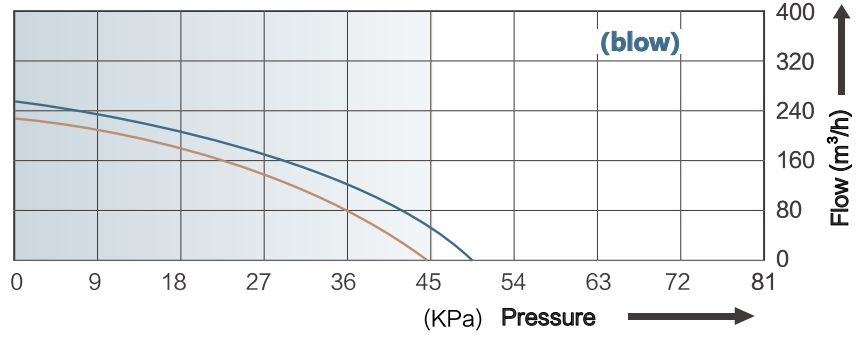


GB


Perotac MADE IN TAIWAN

Performance Curve of gb Series Vortex Air pump (for reference only and not for testing basis)

GB-4000S/2


50HZ 4KW 60HZ 4.8KW

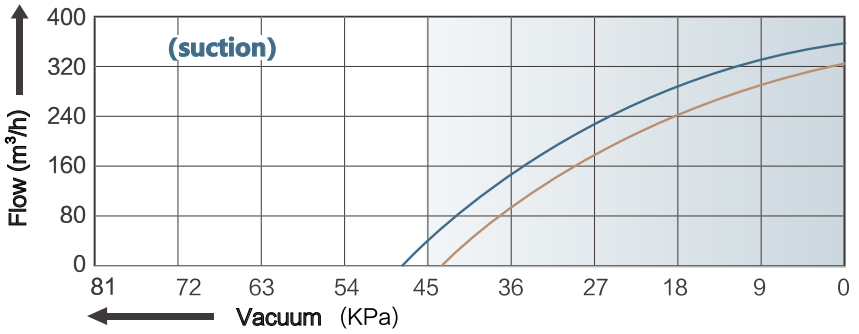


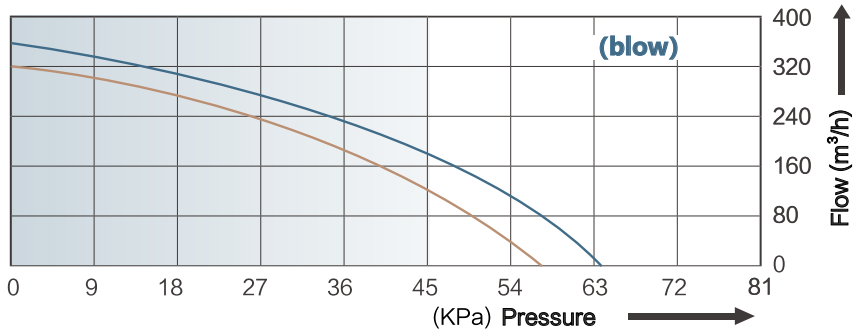

GB-5500S/2


50HZ 5.5KW 60HZ 6.6KW

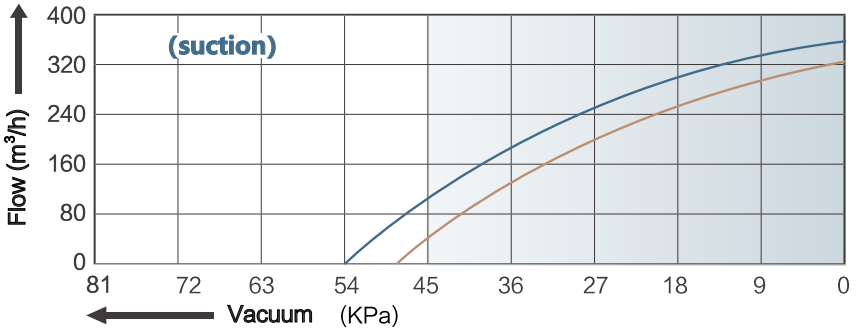


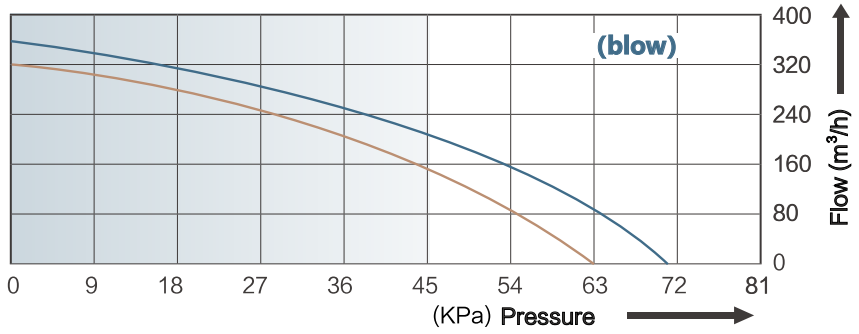

GB-7500S/2

50HZ 7.5KW 60HZ 9.0KW

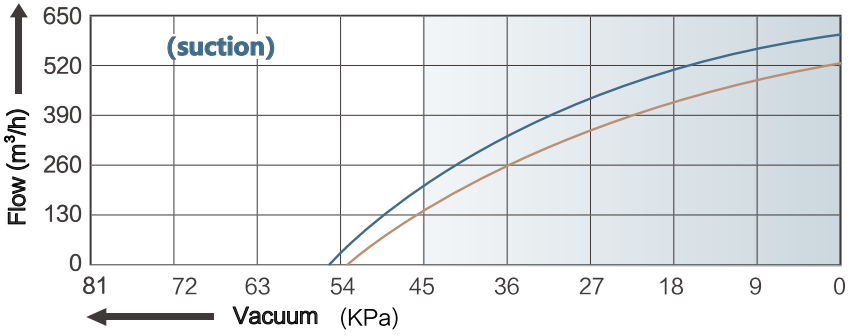

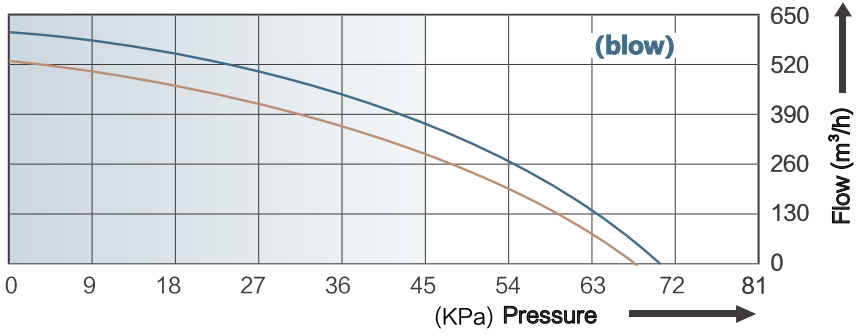


GB


Perotac MADE IN TAIWAN

Performance Curve of gb Series Vortex Air pump (for reference only and not for testing basis)

GB-9500S/2


50HZ 9.5KW 60HZ 11.4KW

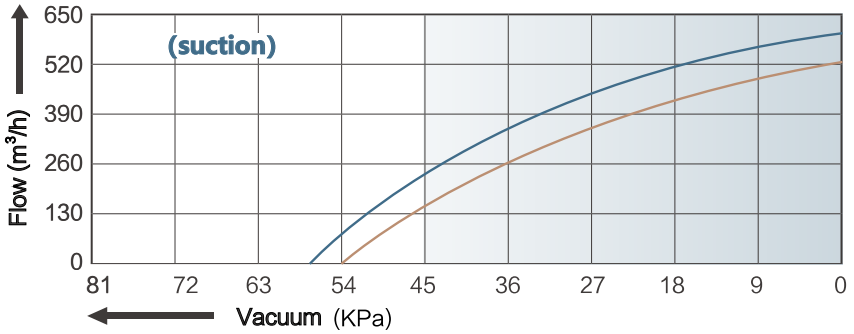


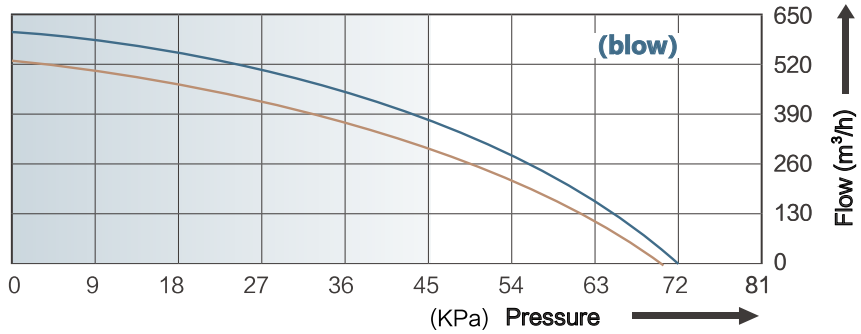

GB-11000S/2


50HZ 11KW 60HZ 12.6KW

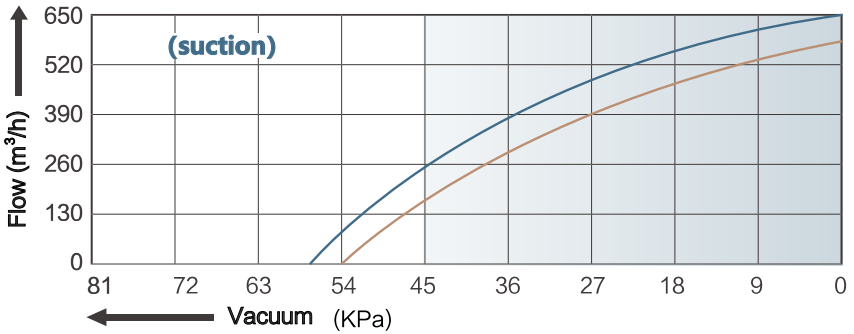


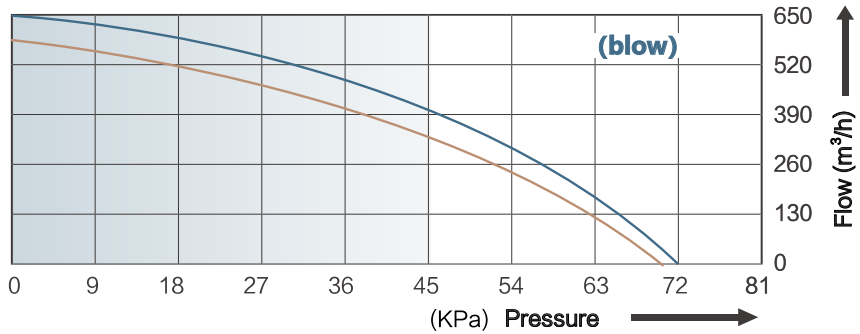

GB-15000S/2


50HZ 15KW 60HZ 18KW

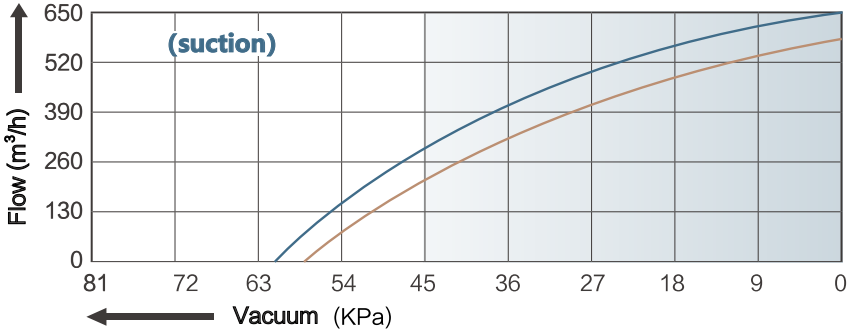


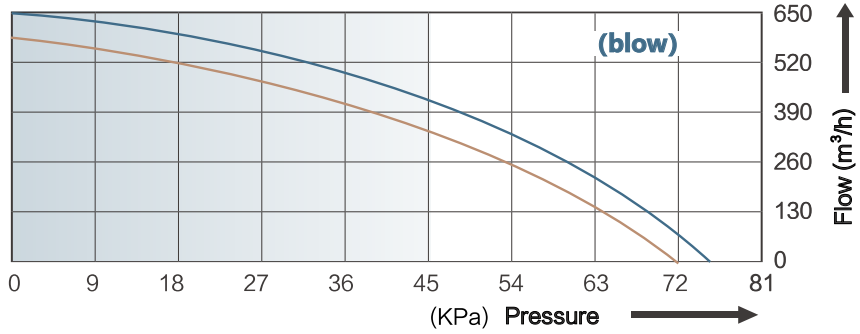


perotac
MADE IN TAIWAN

DIMENSION DIAGRAM

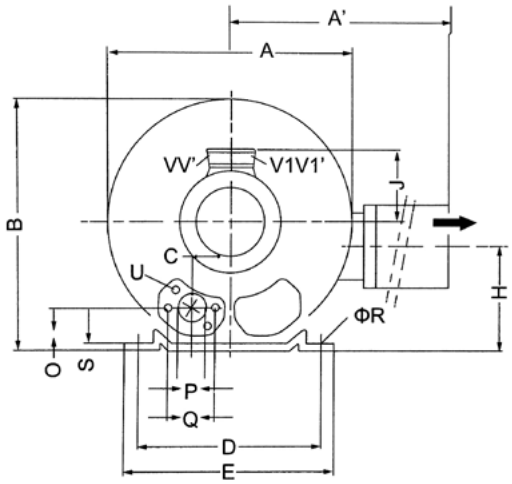

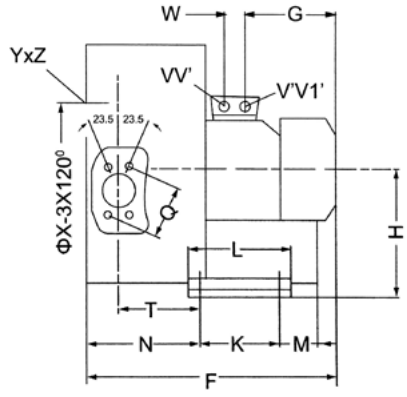



Model	Size																													
	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	φR	S	T	U	V	V'	V1	V1'	a	φX	YXZ	X-Holes	W
GB-550(S)/2	284	316	270	45	205	230	316	135	128	106	111	83	108	75	130	39	G1 1/4	64	10	3	88	M6X17	-	-	M25X1.5	M16X1.5	27°	140	M6X15	51°/171°/291°	
GB-750(S)/2	293	324	286	47	205	230	354	160	141	114	120	83	108	82	138	41	G1 1/4	64	10	3	92	M6X17	-	-	M25X1.5	M16X1.5	27°	140	M6X15	51°/171°/291°	
GB-1100(S)/2	293	324	286	47	205	230	354	160	141	114	120	83	108	82	138	41	G1 1/4	64	10	3	92	M6X17	-	-	M25X1.5	M16X1.5	27°	140	M6X15	51°/171°/291°	
GB-1500(S)/2	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G1 1/2	72	12	3	104	M6X19	-	-	M25X1.5	M16X1.5	28°	174	M6X15	51°/171°/291°	
GB-2200(S)/2	372	411	371	60	260	295	465	190	175	144	135	115	155	98	171	48	G2	83	14	4	116	M8X17	M25X1.5	M25X1.5	-	-		200	M8X20	51.5°/171.5°/291.5°	42
GB-3000S/2	372	411	371	60	260	295	465	190	175	144	135	115	155	98	171	48	G2	83	14	4	116	M8X17	M25X1.5	M25X1.5	-	-		200	M8X20	51.5°/171.5°/291.5°	42
GB-4000S/2	426	426	410	63	290	325	496	188	197	162	135	140	180	84	205	53	G2	83	15	4.5	130	M8X17	-	-	M25X1.5	M25X1.5		240	M10X20	51.5°/171.5°/291.5°	42
GB-5500S/2	426	426	410	154	290	325	571	226	197	162	167	140	180	200	205	53	G2	83	15	4.5	130	M8X17	-	-	M25X1.5	M25X1.5		240	M10X20	51.5°/171.5°/291.5°	42
GB-7500S/2	426	426	410	154	290	325	571	226	197	162	167	140	180	200	205	53	G2	83	15	4.5	130	M8X17	-	-	M25X1.5	M25X1.5		240	M10X20	51.5°/171.5°/291.5°	42
GB-9500S/2	500	549	490	76	356	394	545	226	240	199	167	170	217	-	236	65	G2 1/2		15	6			2XM25X1.5					286	M12X20	514°/120°/240°	42
GB-11000S/2	500	549	490	76	356	394	545	226	240	199	167	170	217	-	212	105	G2 1/2		15	6			2XM32X1.5					286	M12X20	514°/120°/240°	42
GB-15000S/2	500	549	490	76	356	394	545	226	240	199	167	170	217	-	212	105	G2 1/2		15	6			2XM32X1.5					286	M12X20	514°/120°/240°	42

perotac
MADE IN TAIWAN

VORTEX AIR PUMP FITTINGS



FILTER



FILTER



RELIEF VALVE




DISTRIBUTOR



SILENCER




FILTER

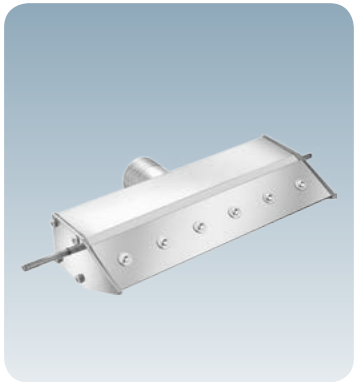

AIR KNIFE



FILTER+PIPE

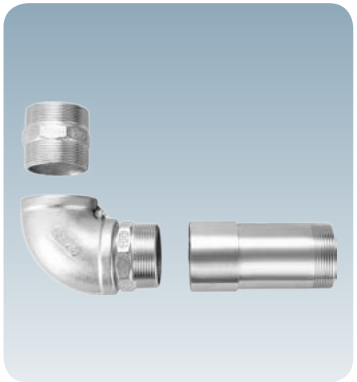

PIPE



ELBOW PIPE


GB

Perotac
MADE IN TAIWAN

APPLICATION EXAMPLE USE OF BLOWING


● Blow hoover exhaust cool transport air cushion

The gas and heavy oil gush out firing




High pressure air (2.00mmaq)adequate ventilation,Will reduce your dependence on compressor

Wash the battle machine and dries up




Beverage bottle washing will drip dry,Applicable to the food industry

Can collect all the bits automatically after cut the Paper




Automatic collection of plastic,cloth,paper cutting edge

It is dry to use the air knife

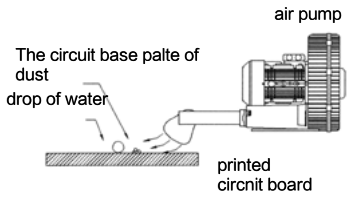


The circuit board can be used to blow a small blower Dust and debris

Air cushion




Increasing the buoyancy easy to move

The domestic animal excrement ferments fierceness gas




High pressure air is blown intothe Storage fecal groove,Increase the contact area,and also suitable for polluted wastewater treatmengt

Subpoena transport




It regards air as motive force to be fast also really to transport

The electrolytic liquid mix round




trough,make the electroly circulate,and repel adhering to the bubble and make electroplate rapidly,the results is even.

The oxygen supply in breed aquatics




water in the pool

Puncher machine




convenient to is it press product of talking shape after to take out

Powder body transport




Power body grains of body,etc,air of raw materials transport

incinerator




atmdspherical help blaze and exhaust

The exhaust gas blows smoking




discharging rapidly by the scattered exhaust gas that appears,so as not to cause pollution

Wash the car and dry up



blow the moisture content to dry after having car machine washing

Print and force dryness


















enabling the printing color to dyr fast

GB

perotac
MADE IN TAIWAN

APPLICATION EXAMPLE USE OF SUCTION

- Blow hoover exhaust cool transport air cushion

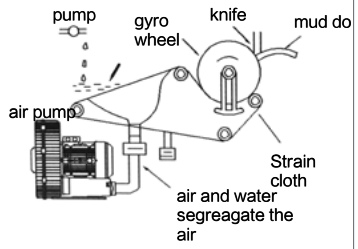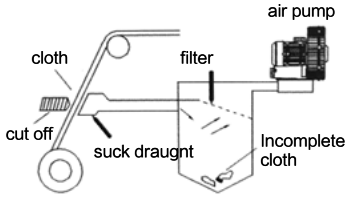The sucking of the printing machine of entwork edition	Eject the exhaust gas and dust produced while welding drawing	The weave cottom machine suck silk	Photo – engraving	The powder body transports
				
The sorption pressure fixed,in order to facilitate the printing operation	Smoke and dust whenwelding vacuum mode protect the operator ensure health	Absorbing moisture and fixed regular end,improve the quality and efficiency	Using vacuum suction force protect film,suitable for gravure industry	Plastic materials and other granular objects,by blowing or sucking to transport
Print suck	**Industry hoover**	**Vacuum dehydrate**	**Make books machine**	**Incomplete cloth deal with**
				
Vacuum sorption printing or tissue formation to	Factory always scrap residue on the machine,can smoke collection	Paper pulp, pollution,cloth dehydrate	When cutting the books sorption kept	Cloth cutting processing
Ox milk paper carton filling machine	**Bean curd machinery**	**Keeping processing**	**Defence works scene**	**Iron cloth machine**
				
Vacuum milk box filled with the attraction	Draw soybean delivery, to the cleaning tank cleaning	Wood,plastic and other non – magnetic objects fixed with	Tunnel with small work site,dust, poisonous gas,partial removall	Press cloth will emit vapor