SA SERIES

AQUARIS MADE IN ITALY

SUBMERSIBLE PUMPS · 2 in TO 6 in WELLS · 50 Hz · n ≈ 2850 /min



16	0.18–22 kW	54 m³/h	450 m
RANGES	POWER	MAX. FLOW	MAX. HEAD

RANGE OVERVIEW

RANGE	WELL Ø	MODELS	POWER (kW)	Q MAX (m³/h)	H MAX (m)	OUTLET	PAGE
2SA0.7	2 in	3	0.18–0.37	0.96	51	0.5 / 0.75 in	02
2.5SA1.5	2.5 in	4	0.25–0.75	2.4	84	1 in	03
3SA2	3 in	8	0.18–1.5	2.7	196	1 / 1.25 / 1.5 in	04
3SA3	3 in	7	0.25–1.5	3.6	149	1 / 1.25 / 1.5 in	05
3SA4	3 in	7	0.25–1.5	5.4	115	1 / 1.25 / 1.5 in	06
4SA3	4 in	13	0.25–5.5	5.4	450	1.25 in	07
4SA4	4 in	13	0.37–7.5	6	427	1.5 in	08
4SA6	4 in	15	0.37–7.5	9.6	328	1.5 in	09
4SA8	4 in	11	0.75–7.5	10.8	255	1.5 in	10
4SA10	4 in	13	0.75–7.5	14.4	218	1.5 in	11
4SA12	4 in	12	0.75–7.5	16	196	2 in	12
4SA16	4 in	11	1.1–7.5	22	139	2 in	13
6SA15	6 in	8	3–15	21	345	3 in	14
6SA25	6 in	9	3–18.5	33	300	3 in	15
6SA35	6 in	9	4–22	45	294	3 in	16
6SA45	6 in	9	4–22	54	211	3 in	17

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR (4 IN)

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 4 12-1.1

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
4	Capacity (m³/h)
12	Number of stages
1.1	Motor power (kW)

PHASE

Models up to 3 kW: single-phase 1~ 220–240 V and three-phase 3~ 380–415 V
Models above 3 kW and 6 in models: three-phase 3~ 380–415 V only


2SA0.7

AQUARIS MADE IN ITALY

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min



0.18–0.37 kW	0.96 m³/h	51 m	0.5 / 0.75 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

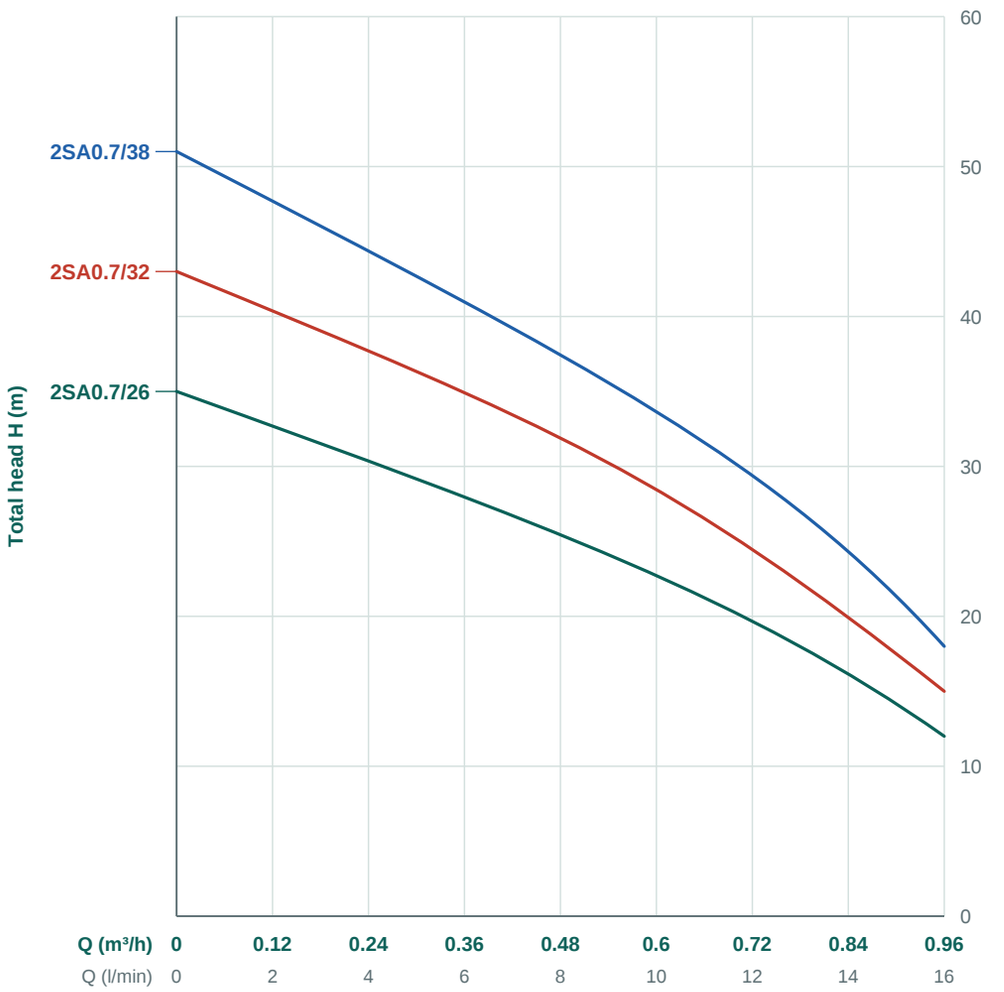

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Pumps designed with stressed casing
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

2 SA 0.7 32-0.25

2	Well diameter: 2 in
SA	2SA submersible pump
0.7	Capacity (m³/h)
32	Number of stages
0.25	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q	m³/h	0	0.12	0.24	0.36	0.48	0.6	0.72	0.84	0.96
					l/min	0	2	4	6	8	10	12	14	16
2SA0.7/26	1~ / 3~	0.18	0.25			35	32	30	28	26	23	20	16	12
2SA0.7/32	1~ / 3~	0.25	0.33	**H (m)**		43	40	37	35	32	29	24	20	15
2SA0.7/38	1~ / 3~	0.37	0.5			51	47	44	41	38	34	29	24	18


2.5SA1.5

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



0.25–0.75 kW	2.4 m³/h	84 m	1 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

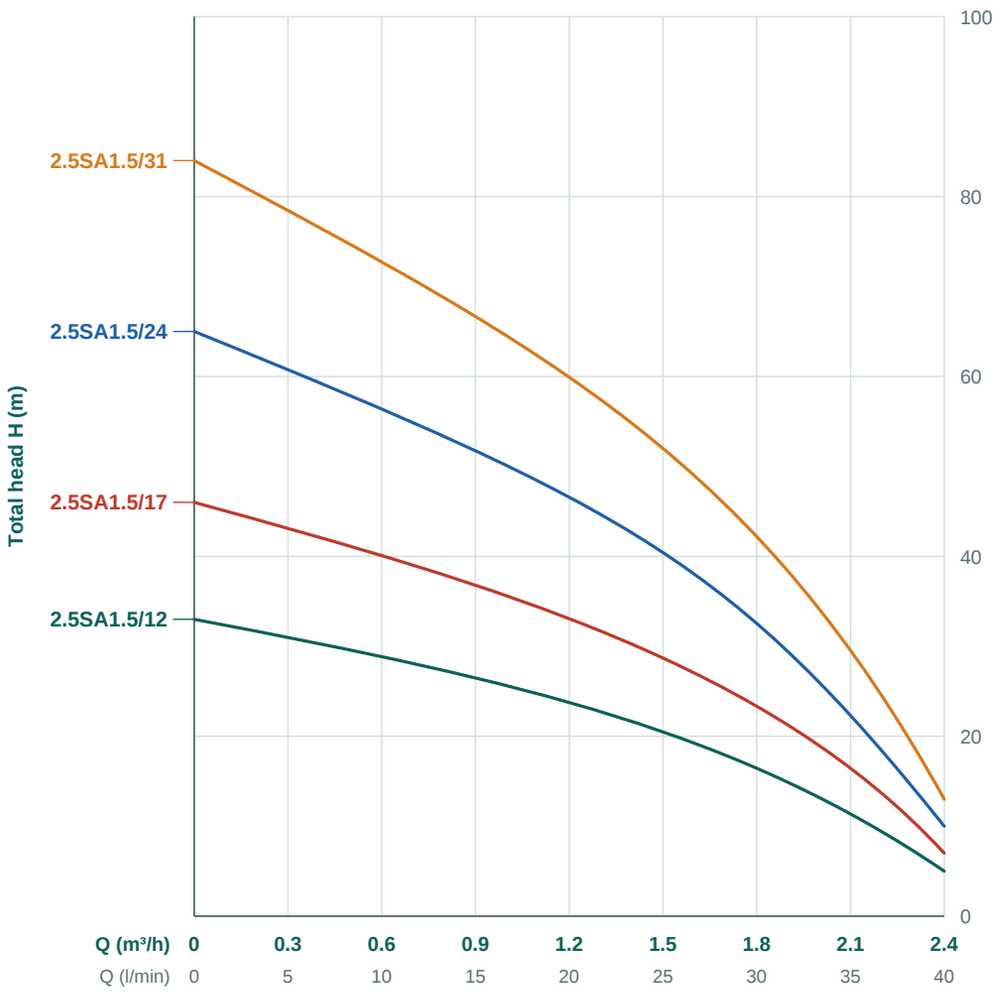

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Pumps designed with stressed casing
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

2.5 SA 1.5 24-0.55

2.5	Well diameter: 2.5 in
SA	2.5SA submersible pump
1.5	Capacity (m³/h)
24	Number of stages
0.55	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q	m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4
					l/min	0	5	10	15	20	25	30	35	40
2.5SA1.5/12	1~ / 3~	0.25	0.33	H (m)		33	30	28	26	23	20	17	11	5
2.5SA1.5/17	1~ / 3~	0.37	0.5			46	42	39	37	33	29	24	16	7
2.5SA1.5/24	1~ / 3~	0.55	0.75			65	60	56	52	46	40	33	22	10
2.5SA1.5/31	1~ / 3~	0.75	1			84	77	72	67	60	52	43	29	13


3SA2

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



0.18–1.5 kW	2.7 m³/h	196 m	1 / 1.25 / 1.5 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

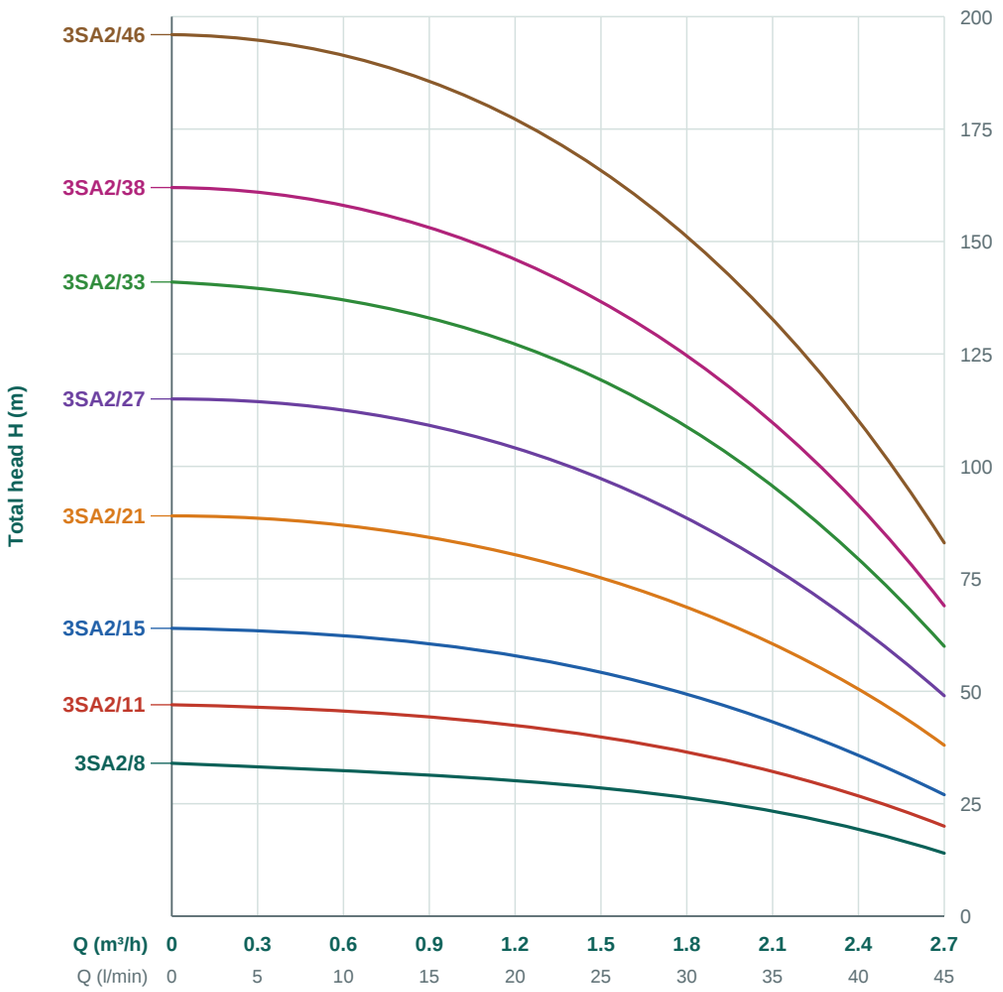

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Pumps designed with stressed casing
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

3 SA 2 27-0.75

3	Well diameter: 3 in
SA	3SA submersible pump
2	Capacity (m³/h)
27	Number of stages
0.75	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7
				Q l/min	0	5	10	15	20	25	30	35	40	45
3SA2/8	1~ / 3~	0.18	0.25	H (m)	34	33	32	31	30	29	26	23	19	14
3SA2/11	1~ / 3~	0.25	0.33		47	46	45	44	43	40	36	32	27	20
3SA2/15	1~ / 3~	0.37	0.5		64	63	62	61	58	54	49	43	36	27
3SA2/21	1~ / 3~	0.55	0.75		89	88	87	85	81	76	68	60	51	38
3SA2/27	1~ / 3~	0.75	1		115	114	112	110	104	97	88	77	65	49
3SA2/33	1~ / 3~	0.92	1.25		141	139	136	134	128	119	108	95	80	60
3SA2/38	1~ / 3~	1.1	1.5		162	160	157	154	147	137	124	109	92	69
3SA2/46	1~ / 3~	1.5	2		196	194	190	187	178	166	150	132	111	83


3SA3

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



0.25–1.5 kW	3.6 m³/h	149 m	1 / 1.25 / 1.5 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

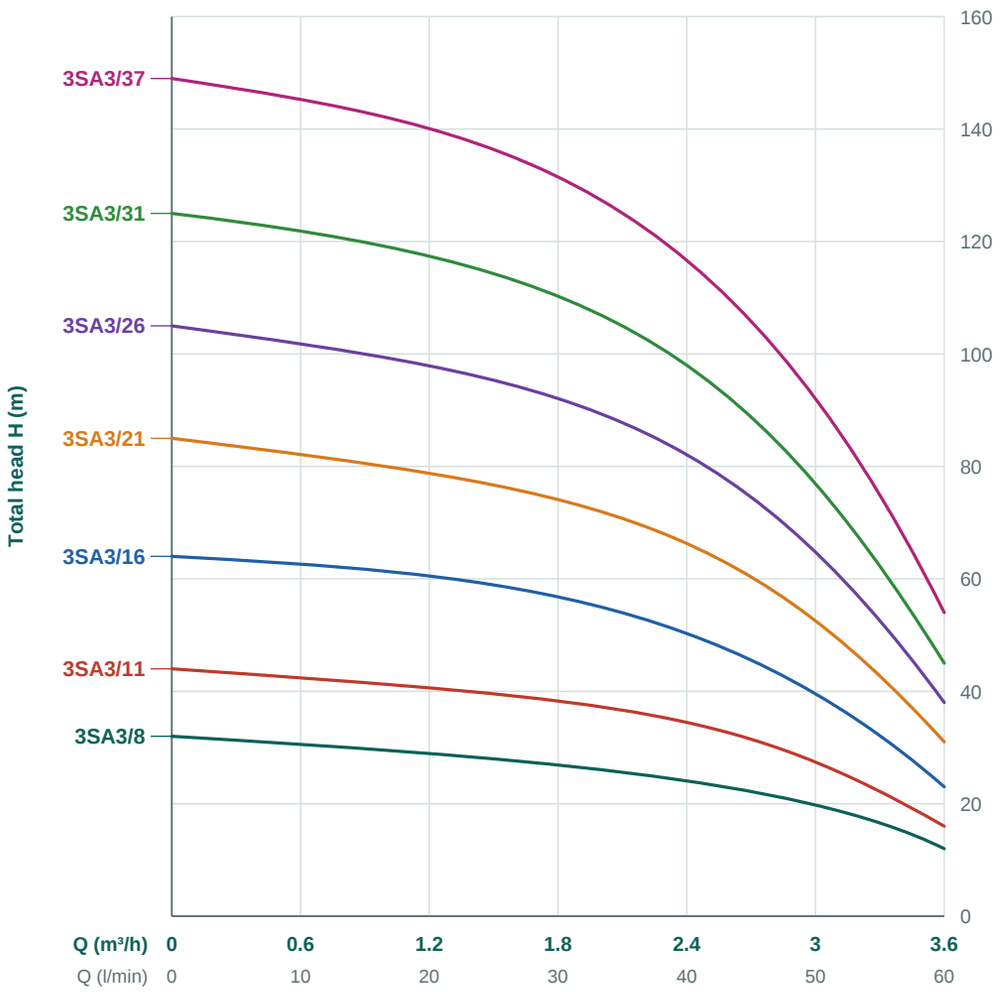

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Pumps designed with stressed casing
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

3 SA 3 21-0.75

3	Well diameter: 3 in
SA	3SA submersible pump
3	Capacity (m³/h)
21	Number of stages
0.75	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3	3.6
				Q l/min	0	5	10	15	20	25	30	35	40	45	50	55	60
3SA3/8	1~ / 3~	0.25	0.33		32	31	30	29	28	27	26	25	24	23	20	16	12
3SA3/11	1~ / 3~	0.37	0.5		44	43	42	41	40	39	38	37	35	31	27	22	16
3SA3/16	1~ / 3~	0.55	0.75		64	63	62	61	60	59	56	54	51	45	39	32	23
3SA3/21	1~ / 3~	0.75	1	H (m)	85	84	83	81	79	77	74	70	67	60	52	43	31
3SA3/26	1~ / 3~	0.92	1.25		105	104	103	100	98	96	91	87	83	74	64	53	38
3SA3/31	1~ / 3~	1.1	1.5		125	124	122	120	116	114	109	104	99	88	76	63	45
3SA3/37	1~ / 3~	1.5	2		149	148	146	143	139	136	130	124	118	105	91	75	54


3SA4

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



0.25–1.5 kW	5.4 m³/h	115 m	1 / 1.25 / 1.5 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

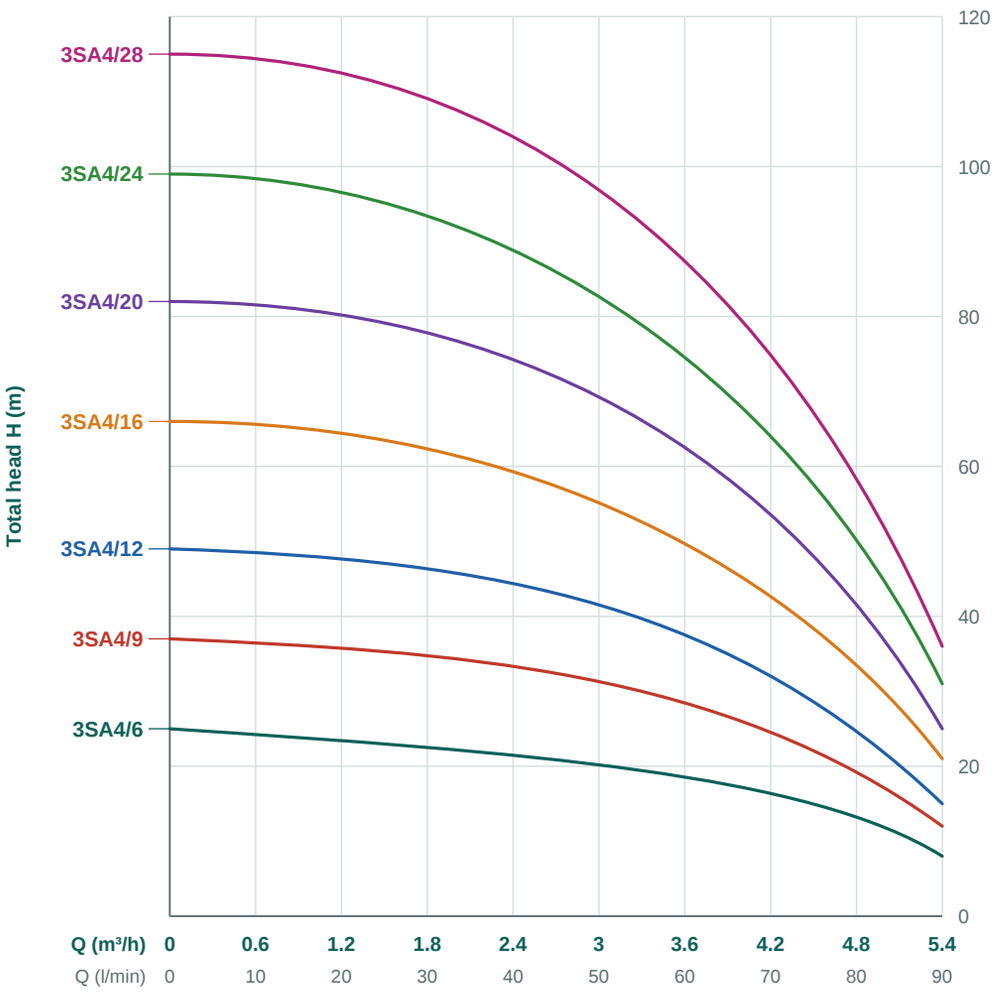

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Pumps designed with stressed casing
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

3 SA 4 16-0.75

3	Well diameter: 3 in
SA	3SA submersible pump
4	Capacity (m³/h)
16	Number of stages
0.75	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h / l/min	0 / 0	0.6 / 10	1.2 / 20	1.8 / 30	2.4 / 40	3 / 50	3.6 / 60	4.2 / 70	4.8 / 80	5.4 / 90
3SA4/6	1~ / 3~	0.25	0.33		25	24	23	22	21	20	19	16	13	8
3SA4/9	1~ / 3~	0.37	0.5		37	36	35	34	33	32	28	24	19	12
3SA4/12	1~ / 3~	0.55	0.75		49	48	47	46	45	42	37	32	25	15
3SA4/16	1~ / 3~	0.75	1	H (m)	66	65	64	62	59	56	50	42	34	21
3SA4/20	1~ / 3~	0.92	1.25		82	81	80	78	74	70	62	53	42	25
3SA4/24	1~ / 3~	1.1	1.5		99	98	97	93	89	84	75	63	51	31
3SA4/28	1~ / 3~	1.5	2		115	114	113	109	104	98	87	74	59	36


4SA3

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



0.25–5.5 kW	5.4 m³/h	450 m	1.25 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

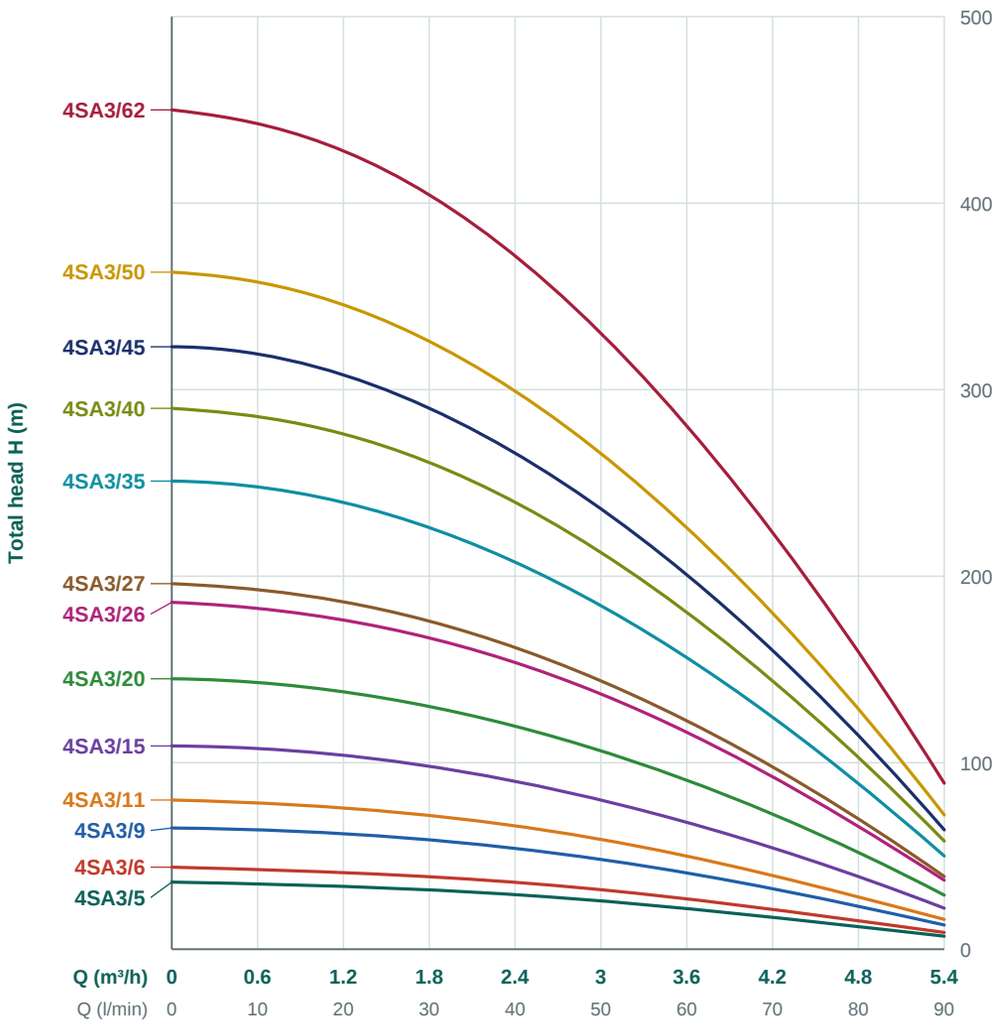

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 3 15-1.1

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
3	Capacity (m³/h)
15	Number of stages
1.1	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	1.2	2.4	3.6	4.8	5.4
				Q l/min	0	20	40	60	80	90
4SA3/5	1~ / 3~	0.25	0.33		36	34	**29**	22	12	7
4SA3/6	1~ / 3~	0.37	0.5		44	41	**36**	27	15	9
4SA3/9	1~ / 3~	0.55	0.75		65	62	**54**	41	23	13
4SA3/11	1~ / 3~	0.75	1.0		80	76	**66**	50	28	16
4SA3/15	1~ / 3~	1.1	1.5		109	104	**90**	68	39	22
4SA3/20	1~ / 3~	1.5	2.0		145	138	**120**	90	52	29
4SA3/26	1~ / 3~	1.8	2.5	H (m)	186	176	**154**	116	66	37
4SA3/27	1~ / 3~	2.2	3.0		196	186	**162**	122	70	39
4SA3/35	1~ / 3~	2.6	3.5		251	239	**208**	156	89	50
4SA3/40	1~ / 3~	3.0	4.0		290	276	**240**	180	103	58
4SA3/45	3~	3.7	5.0		323	307	**267**	200	115	64
4SA3/50	3~	4.0	5.5		363	345	**300**	225	129	72
4SA3/62	3~	5.5	7.5		450	428	**372**	279	160	89


4SA4

AQUARIS MADE IN ITALY

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min



0.37–7.5 kW	6 m³/h	427 m	1.5 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

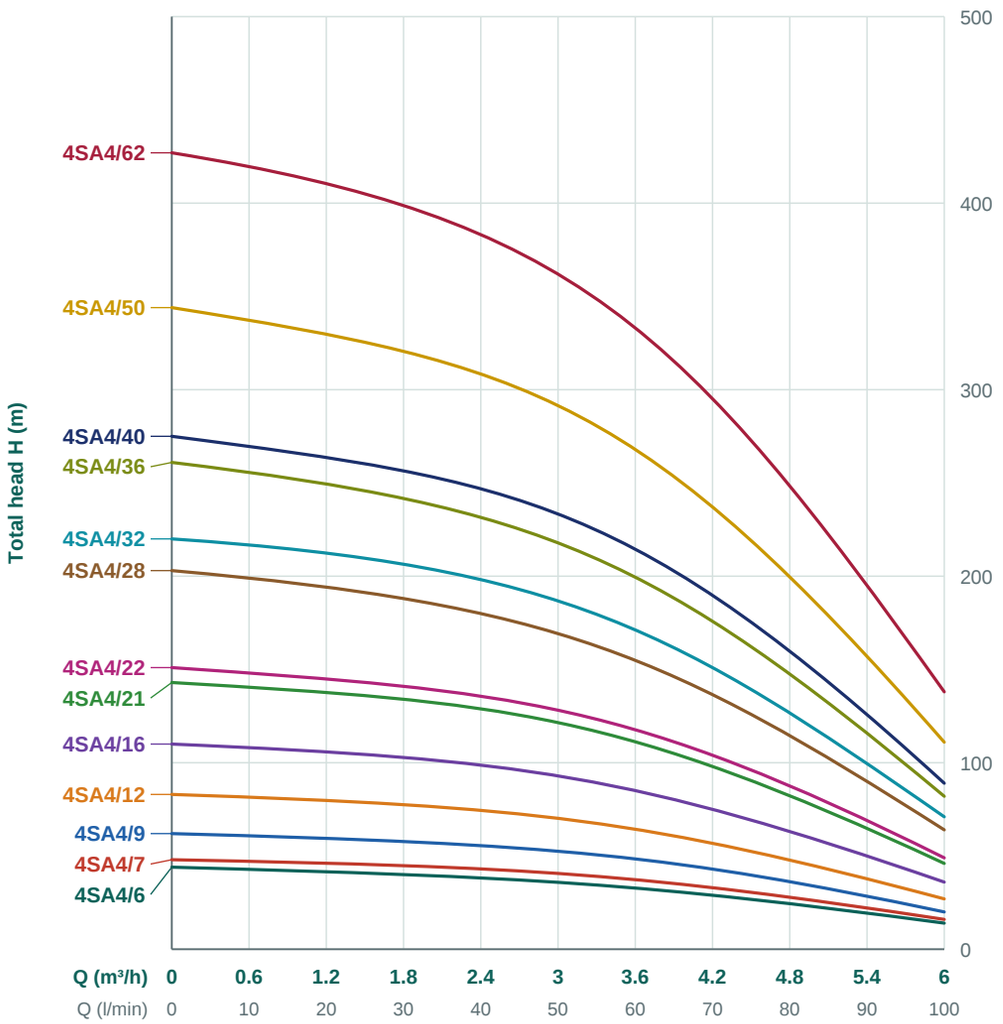

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 4 12-1.1

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
4	Capacity (m³/h)
12	Number of stages
1.1	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	1.2	3	4.2	5.4	6
				Q l/min	0	20	50	70	90	100
4SA4/6	1~ / 3~	0.37	0.5		44	41	**36**	29	19	14
4SA4/7	1~ / 3~	0.55	0.75		48	46	**41**	33	22	16
4SA4/9	1~ / 3~	0.75	1.0		62	59	**53**	43	28	20
4SA4/12	1~ / 3~	1.1	1.5		83	79	**71**	57	37	27
4SA4/16	1~ / 3~	1.5	2.0		110	105	**94**	76	49	36
4SA4/21	1~ / 3~	1.8	2.5		143	136	**123**	98	64	46
4SA4/22	1~ / 3~	2.2	3.0	H (m)	151	144	**130**	104	68	49
4SA4/28	1~ / 3~	2.6	3.5		203	192	**170**	135	90	64
4SA4/32	1~ / 3~	3.0	4.0		220	210	**189**	151	99	71
4SA4/36	3~	3.7	5.0		261	247	**219**	174	116	82
4SA4/40	3~	4.0	5.5		275	262	**236**	189	124	89
4SA4/50	3~	5.5	7.5		344	328	**295**	237	155	111
4SA4/62	3~	7.5	10		427	406	**366**	293	192	138


4SA6

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



0.37–7.5 kW	9.6 m³/h	328 m	1.5 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

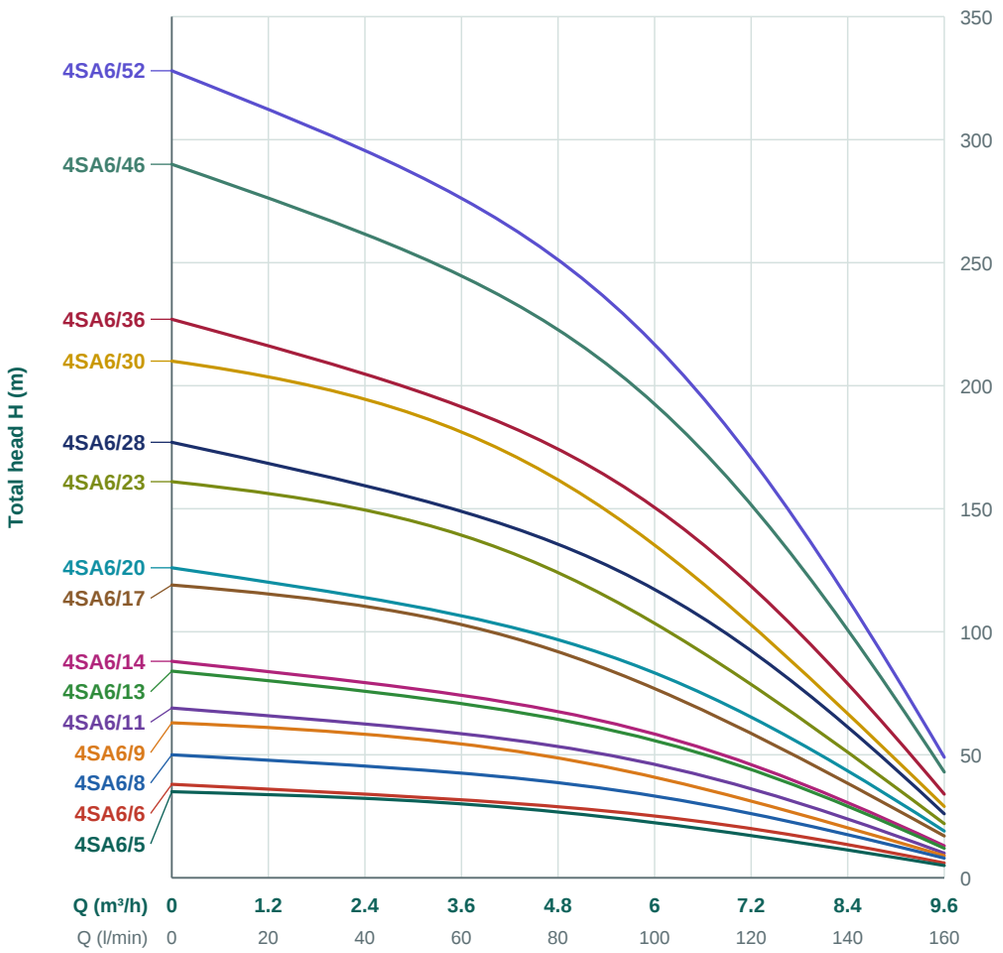

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 6 20-2.2

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
6	Capacity (m³/h)
20	Number of stages
2.2	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	1.2	2.4	4.8	7.2	9.6
				Q l/min	0	20	40	80	120	160
4SA6/5	1~ / 3~	0.37	0.5		35	34	**32**	27	17	5
4SA6/6	1~ / 3~	0.55	0.75		38	36	**34**	29	20	6
4SA6/8	1~ / 3~	0.75	1.0		50	48	**45**	39	26	8
4SA6/9	1~ / 3~	0.92	1.25		63	61	**58**	49	31	9
4SA6/11	1~ / 3~	1.1	1.5		69	66	**62**	54	36	10
4SA6/13	1~ / 3~	1.3	1.75		84	81	**75**	65	44	12
4SA6/14	1~ / 3~	1.5	2.0		88	85	**78**	68	46	13
4SA6/17	1~ / 3~	1.8	2.5	H (m)	119	114	**110**	93	58	17
4SA6/20	1~ / 3~	2.2	3.0		126	121	**112**	98	65	19
4SA6/23	1~ / 3~	2.6	3.5		161	155	**149**	125	78	22
4SA6/28	1~ / 3~	3.0	4.0		177	169	**157**	137	92	26
4SA6/30	3~	3.7	5.0		210	202	**194**	163	102	29
4SA6/36	3~	4.0	5.5		227	217	**202**	176	118	34
4SA6/46	3~	5.5	7.5		290	278	**258**	225	151	43
4SA6/52	3~	7.5	10		328	314	**291**	254	170	49


4SA8

AQUARIS MADE IN ITALY

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min



0.75–7.5 kW	10.8 m³/h	255 m	1.5 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

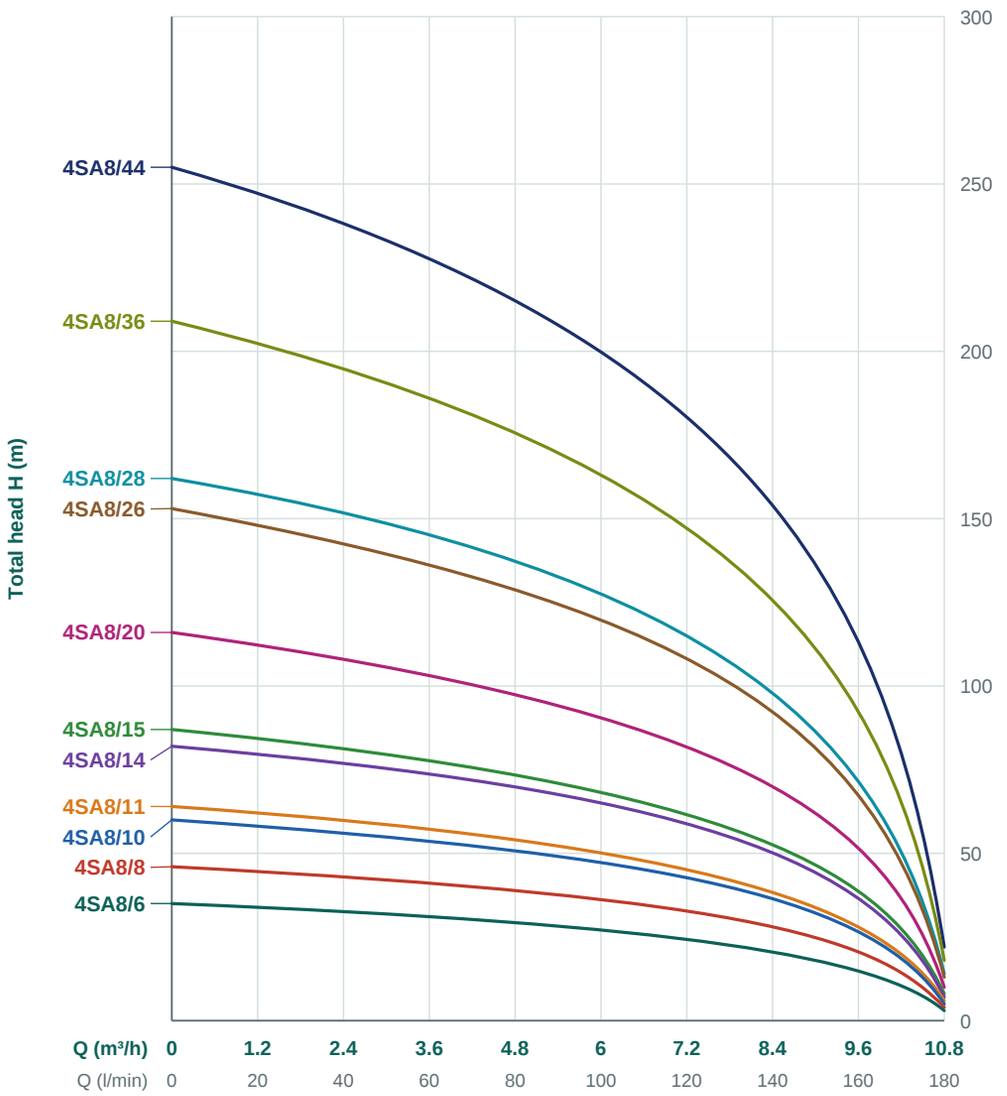

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 8 15-2.2

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
8	Capacity (m³/h)
15	Number of stages
2.2	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	Q l/min	0	2.4	4.8	7.2	9.6	10.8
						0	40	80	120	160	180
4SA8/6	1~ / 3~	0.75	1.0			35	33	**29**	24	15	3
4SA8/8	1~ / 3~	1.1	1.5			46	44	**39**	32	21	4
4SA8/10	1~ / 3~	1.3	1.75			60	57	**51**	42	27	5
4SA8/11	1~ / 3~	1.5	2.0			64	60	**54**	45	28	6
4SA8/14	1~ / 3~	1.8	2.5			82	78	**70**	58	37	7
4SA8/15	1~ / 3~	2.2	3.0	H (m)		87	82	**74**	61	39	8
4SA8/20	1~ / 3~	3.0	4.0			116	109	**98**	81	52	10
4SA8/26	3~	3.7	5.0			153	144	**129**	107	68	13
4SA8/28	3~	4.0	5.5			162	153	**137**	114	72	14
4SA8/36	3~	5.5	7.5			209	196	**177**	146	93	18
4SA8/44	3~	7.5	10			255	240	**216**	179	114	22


4SA10

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS MADE IN ITALY



0.75–7.5 kW	14.4 m³/h	218 m	1.5 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

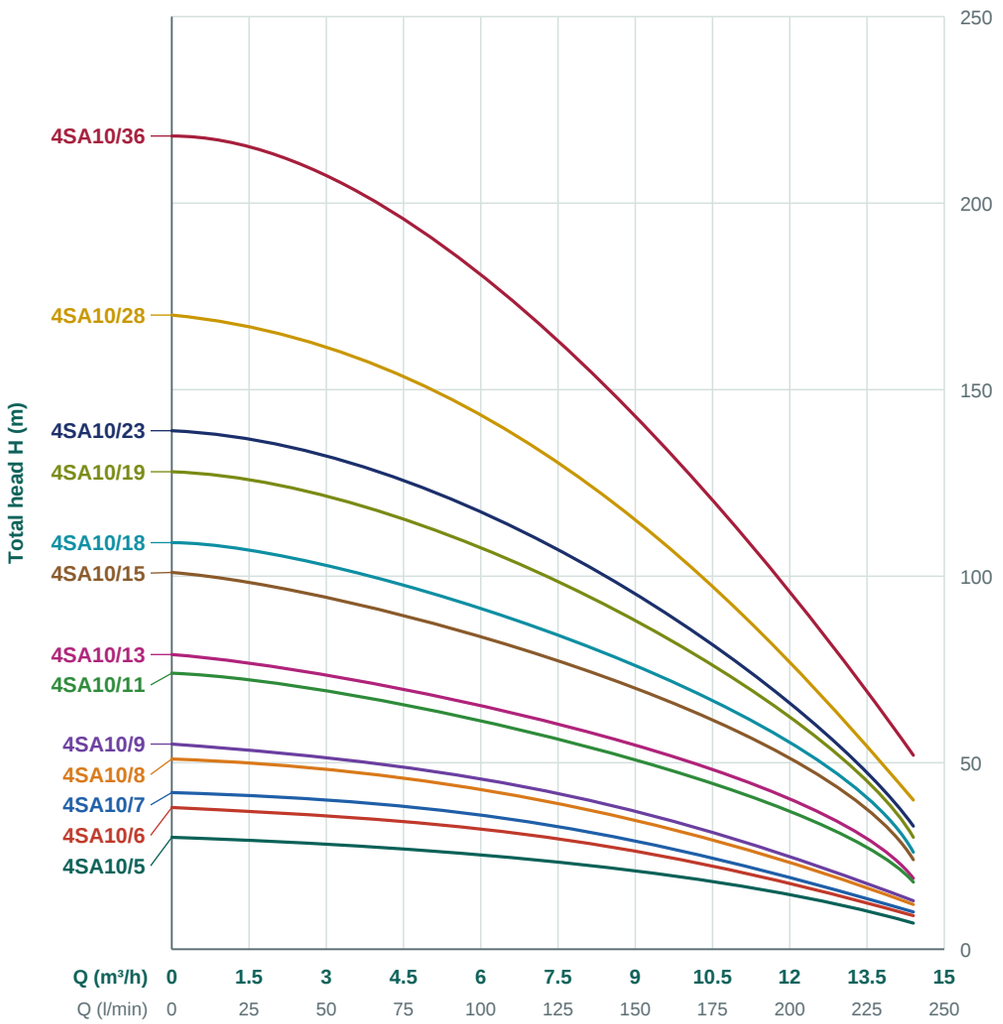

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 10 13-2.2

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
10	Capacity (m³/h)
13	Number of stages
2.2	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	1.8	5.4	9	12.6	14.4
				Q l/min	0	30	90	150	210	240
4SA10/5	1~ / 3~	0.75	1.0		30	29	**26**	21	13	7
4SA10/6	1~ / 3~	0.92	1.25		38	37	**33**	26	16	9
4SA10/7	1~ / 3~	1.1	1.5		42	41	**37**	29	17	10
4SA10/8	1~ / 3~	1.3	1.75		51	50	**44**	35	21	12
4SA10/9	1~ / 3~	1.5	2.0		55	53	**47**	37	22	13
4SA10/11	1~ / 3~	1.8	2.5		74	72	**64**	50	34	18
4SA10/13	1~ / 3~	2.2	3.0	H (m)	79	77	**68**	54	37	19
4SA10/15	1~ / 3~	2.6	3.5		101	99	**87**	69	47	24
4SA10/18	1~ / 3~	3.0	4.0		109	107	**94**	75	51	26
4SA10/19	3~	3.7	5.0		128	125	**111**	88	56	30
4SA10/23	3~	4.0	5.5		139	136	**121**	95	59	33
4SA10/28	3~	5.5	7.5		170	166	**147**	116	68	40
4SA10/36	3~	7.5	10.0		218	213	**189**	149	82	52


4SA12

AQUARIS MADE IN ITALY

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min



0.75–7.5 kW	16 m³/h	196 m	2 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

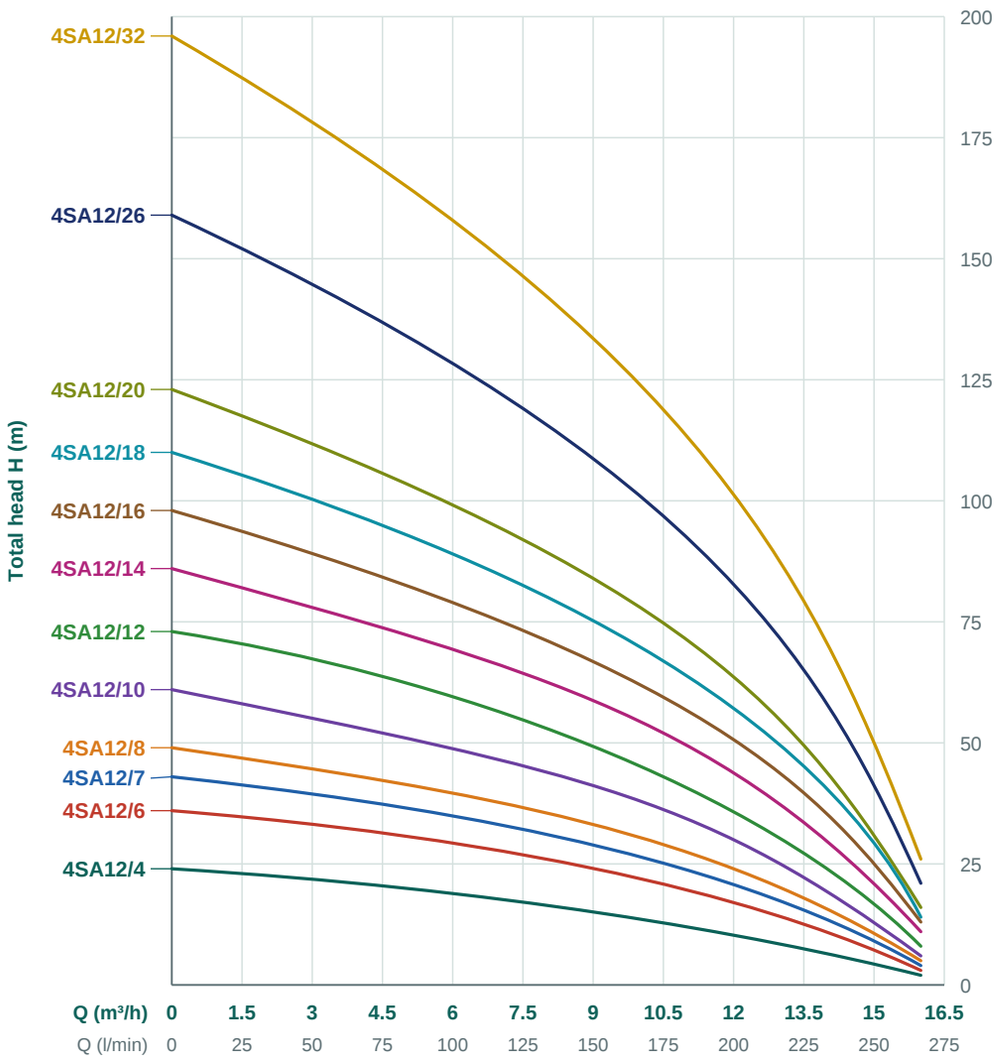

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 12 12-2.2

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
12	Capacity (m³/h)
12	Number of stages
2.2	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	4	8	10	12	16
				Q l/min	0	67	133	167	200	267
4SA12/4	1~ / 3~	0.75	1	H (m)	24	21	**16**	14	10	2
4SA12/6	1~ / 3~	1.1	1.5		36	32	**26**	22	17	3
4SA12/7	1~ / 3~	1.3	1.75		43	38	**31**	26	21	4
4SA12/8	1~ / 3~	1.5	2		49	43	**36**	30	24	5
4SA12/10	1~ / 3~	1.8	2.5		61	53	**44**	38	30	6
4SA12/12	1~ / 3~	2.2	3		73	65	**53**	45	36	8
4SA12/14	1~ / 3~	2.6	3.5		86	76	**62**	54	44	11
4SA12/16	1~ / 3~	3	4		98	86	**71**	62	51	13
4SA12/18	3~	3.7	5		110	97	**80**	70	57	14
4SA12/20	3~	4	5.5		123	108	**89**	78	64	16
4SA12/26	3~	5.5	7.5		159	140	**115**	101	83	21
4SA12/32	3~	7.5	10		196	172	**142**	124	102	26


4SA16

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS MADE IN ITALY



1.1–7.5 kW	22 m³/h	139 m	2 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

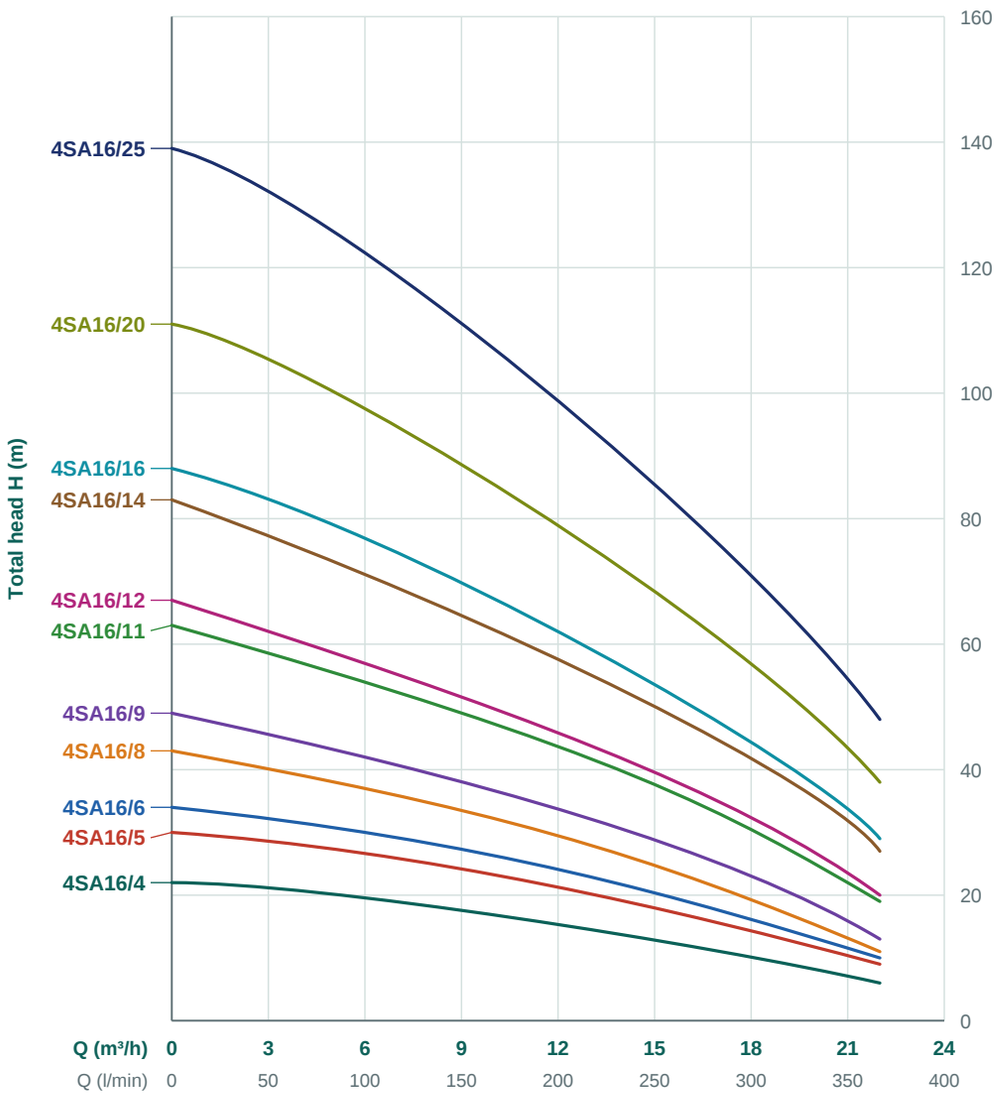

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Complies with the NEMA standard
Insulation class: B
Protection class: IP68
Maximum diameter: Ø95 mm
Maximum liquid temperature: 35 °C
Single-phase 1~: 220–240 V / 50 Hz
Three-phase 3~: 380–415 V / 50 Hz

MODEL CODE

4 SA 16 12-3.0

4	Well diameter: 100 mm (4 in)
SA	4SA steel submersible pump
16	Capacity (m³/h)
12	Number of stages
3.0	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h	0	6	12	14	16	22
				Q l/min	0	100	200	233	267	367
4SA16/4	1~ / 3~	1.1	1.5		22	20	**15**	14	12	6
4SA16/5	1~ / 3~	1.3	1.75		30	27	**21**	19	17	9
4SA16/6	1~ / 3~	1.5	2.0		34	30	**24**	22	19	10
4SA16/8	1~ / 3~	1.8	2.5		43	37	**30**	26	23	11
4SA16/9	1~ / 3~	2.2	3		49	42	**34**	30	27	13
4SA16/11	1~ / 3~	2.6	3.5	H (m)	63	55	**44**	39	36	19
4SA16/12	1~ / 3~	3	4		67	58	**46**	41	38	20
4SA16/14	3~	3.7	5.0		83	72	**58**	52	48	27
4SA16/16	3~	4	5.5		88	77	**62**	56	51	29
4SA16/20	3~	5.5	7.5		111	98	**78**	72	65	38
4SA16/25	3~	7.5	10		139	123	**98**	90	81	48


6SA15

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



3–15 kW	21 m³/h	345 m	3 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

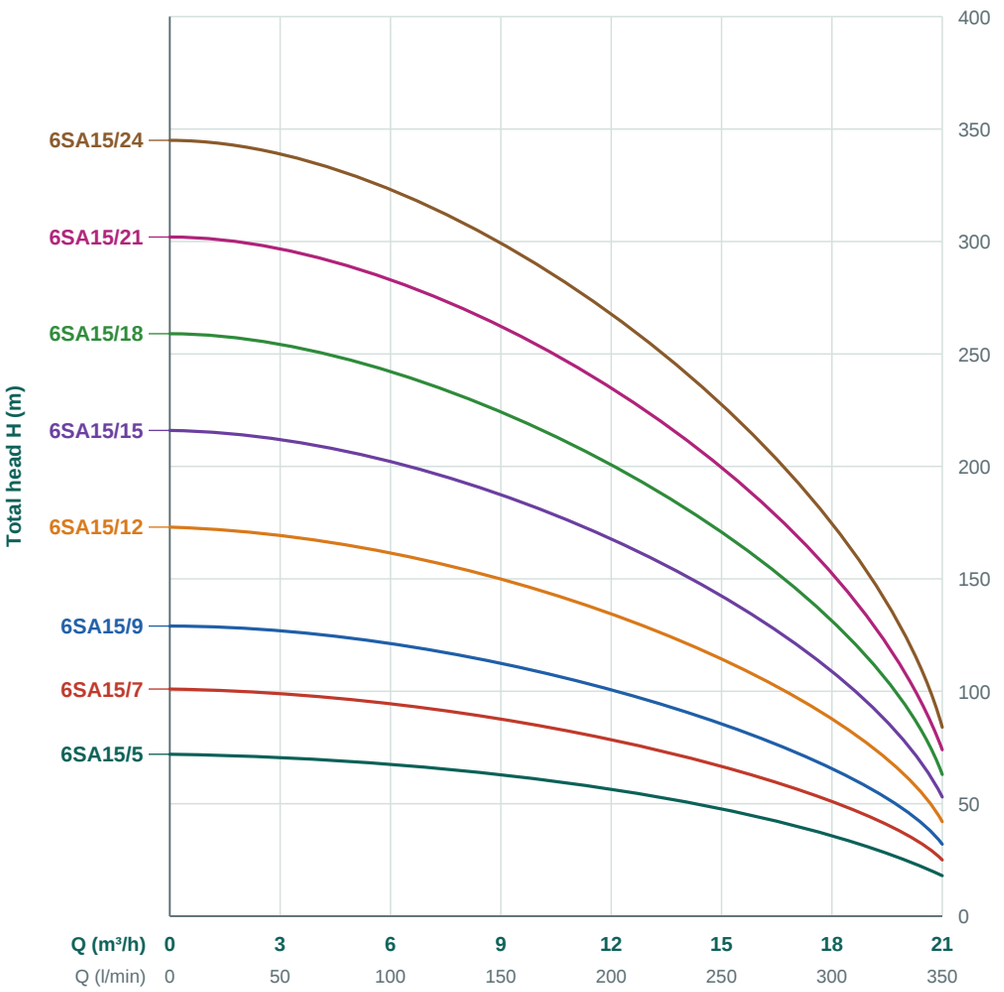

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

6 SA 15 15-9.2

6	Well diameter: 6 in
SA	6SA submersible pump
15	Capacity (m³/h)
15	Number of stages
9.2	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q	m³/h	0	3	6	9	12	15	18	21
					l/min	0	50	100	150	200	250	300	350
6SA15/5	3~	3	4	H (m)		72	70	68	63	56	48	36	18
6SA15/7	3~	4	5.5			101	99	95	88	78	67	51	25
6SA15/9	3~	5.5	7.5			129	127	122	113	100	86	66	32
6SA15/12	3~	7.5	10			173	169	162	150	134	114	88	42
6SA15/15	3~	9.2	12.5			216	211	203	188	167	143	109	53
6SA15/18	3~	11	15			259	254	243	225	200	171	131	63
6SA15/21	3~	13	17.5			302	296	284	263	234	200	153	74
6SA15/24	3~	15	20			345	338	324	300	267	228	175	84


6SA25

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS MADE IN ITALY



3–18.5 kW	33 m³/h	300 m	3 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

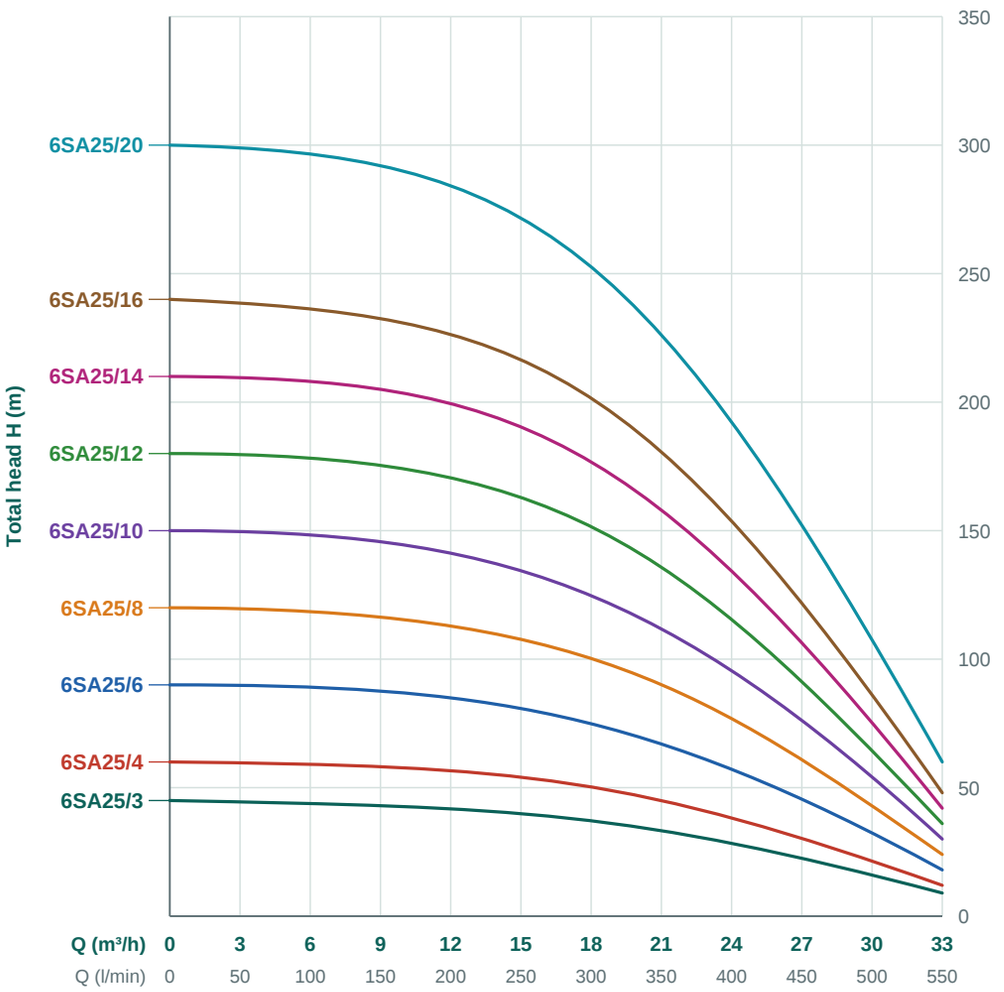

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

6 SA 25 10-9.2

6	Well diameter: 6 in
SA	6SA submersible pump
25	Capacity (m³/h)
10	Number of stages
9.2	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h / l/min	H (m)	0 / 0	3 / 50	6 / 100	9 / 150	12 / 200	15 / 250	18 / 300	21 / 350	24 / 400	27 / 450	30 / 500	33 / 550
6SA25/3	3~	3	4			45	44	43	42	41	40	38	33	28	22	16	9
6SA25/4	3~	4	5.5			60	59	58	57	56	54	50	45	39	30	21	12
6SA25/6	3~	5.5	7.5			90	89	88	87	85	81	76	66	58	45	32	18
6SA25/8	3~	7.5	10			120	119	118	117	113	108	101	89	78	60	43	24
6SA25/10	3~	9.2	12.5			150	149	148	146	141	135	126	111	97	75	55	30
6SA25/12	3~	11	15			180	179	178	175	169	162	151	134	117	90	65	36
6SA25/14	3~	13	17.5			210	209	208	204	197	189	176	156	136	105	76	42
6SA25/16	3~	15	20			240	239	238	234	226	216	202	178	156	120	87	48
6SA25/20	3~	18.5	25			300	299	298	292	282	270	252	223	195	150	109	60


6SA35

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS MADE IN ITALY



4–22 kW	45 m³/h	294 m	3 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

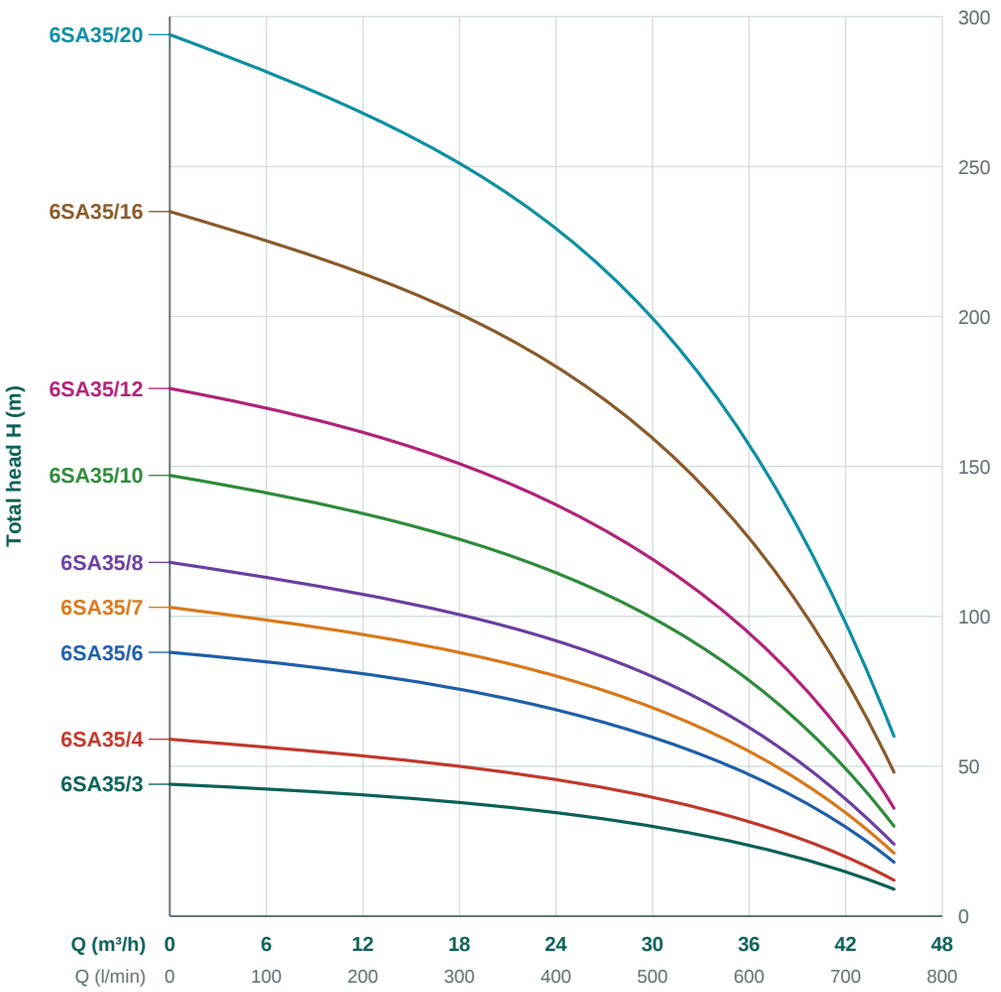

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

6 SA 35 8-11

6	Well diameter: 6 in
SA	6SA submersible pump
35	Capacity (m³/h)
8	Number of stages
11	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h / l/min	0 / 0	5 / 83	10 / 167	15 / 250	20 / 333	25 / 417	30 / 500	35 / 583	40 / 667	45 / 750
6SA35/3	3~	4	5.5		44	43	41	39	37	34	30	25	18	9
6SA35/4	3~	5.5	7.5		59	57	54	52	49	45	40	33	24	12
6SA35/6	3~	7.5	10		88	86	82	78	73	67	60	50	36	18
6SA35/7	3~	9.2	12.5		103	100	95	91	85	78	70	58	42	21
6SA35/8	3~	11	15	**H (m)**	118	114	109	104	98	90	80	66	48	24
6SA35/10	3~	13	17.5		147	143	136	130	122	112	100	83	60	30
6SA35/12	3~	15	20		176	171	163	155	146	134	120	100	72	36
6SA35/16	3~	18.5	25		235	228	218	207	195	179	160	133	96	48
6SA35/20	3~	22	30		294	285	272	259	244	224	200	166	120	60


6SA45

SA SERIES · SUBMERSIBLE PUMPS · 50 Hz · n ≈ 2850 /min

AQUARIS
MADE IN ITALY



4–22 kW	54 m³/h	211 m	3 in
POWER	MAX. FLOW	MAX. HEAD	OUTLET

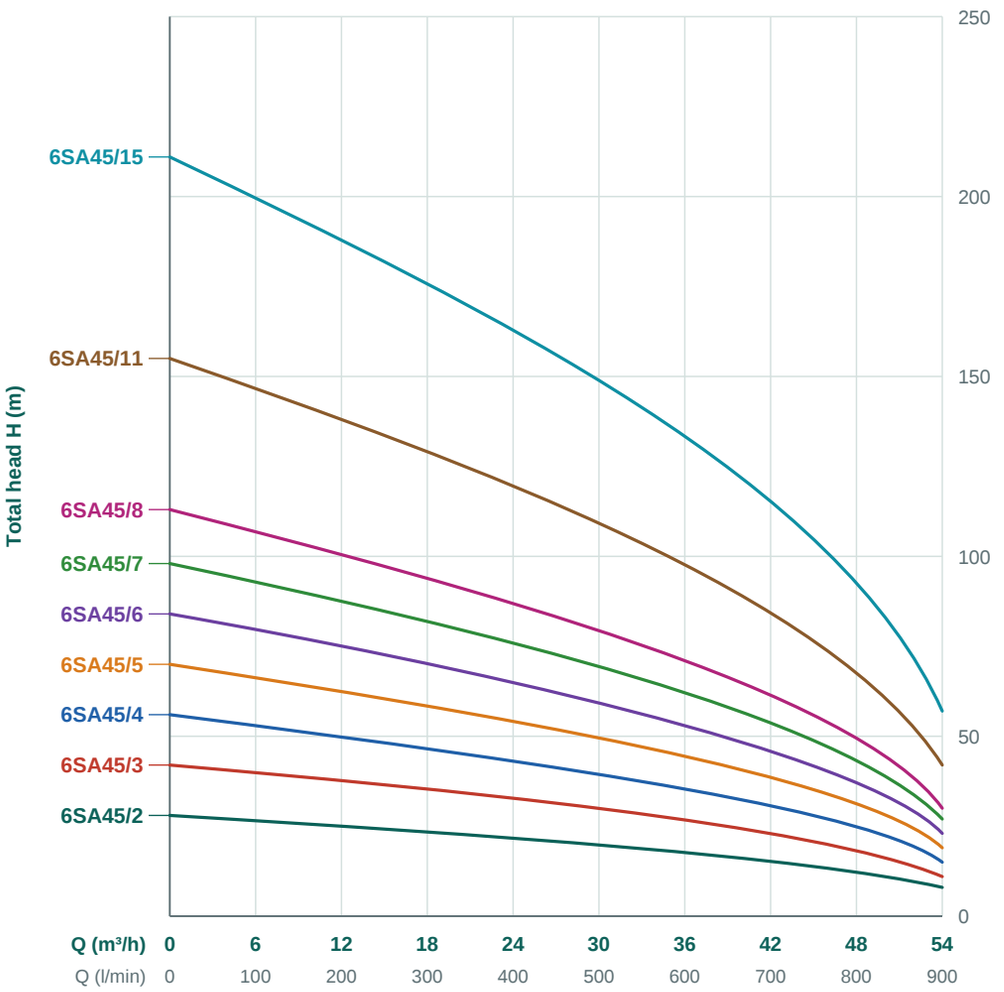

TYPICAL APPLICATIONS

Water supply systems
Pressure boosting
Garden and farm irrigation
Lowering of groundwater level
Various industrial applications

PUMP / MOTOR

Rewindable motor
Three-phase: 380–415 V / 50 Hz
With start control box or digital auto-control box
Curve tolerance according to ISO 9906
Maximum fluid temperature: +35 °C

MODEL CODE

6 SA 45 6-11

6	Well diameter: 6 in
SA	6SA submersible pump
45	Capacity (m³/h)
6	Number of stages
11	Motor power (kW)

PERFORMANCE DATA

MODEL	PHASE	P_2 kW	P_2 HP	Q m³/h / l/min	H (m) 0	6 / 100	12 / 200	18 / 300	24 / 400	30 / 500	36 / 600	42 / 700	48 / 800	54 / 900
6SA45/2	3~	4	5.5		28	27	25	23	22	20	18	15	12	8
6SA45/3	3~	5.5	7.5		42	40	38	35	33	30	27	23	18	11
6SA45/4	3~	7.5	10		56	53	50	47	43	39	35	31	25	15
6SA45/5	3~	9.2	12.5		70	67	63	58	54	49	44	39	31	19
6SA45/6	3~	11	15		84	80	75	70	65	59	53	46	37	23
6SA45/7	3~	13	17.5		98	93	88	82	76	69	62	54	43	27
6SA45/8	3~	15	20		113	107	100	93	87	79	71	62	49	30
6SA45/11	3~	18.5	25		155	147	138	128	120	109	98	85	67	42
6SA45/15	3~	22	30		211	200	188	175	163	148	133	116	92	57