SS SERIES

SS

Submersible sewage pump



1 **SS-150 … SS-3000**
three-phase, without float switch

2 **SSM-150F … SSM-1100F**
single-phase, with float switch

3 **SSM-1500F … SSM-3000F**
single-phase, with float switch

RANGE CHARACTERISTICS

Power	**0.15–3 kW**
Max. flow rate	**60 m³/h**
Max. head	**22 m**
Speed	**n ≈ 2850 /min**

MODEL CODE

SS-250	three-phase 3~
SSM-250F	single-phase 1~

APPLICATIONS

Sewage treatment plants
Industrial drainage
Agricultural irrigation

MATERIALS

Outer motor casing
Cast iron G20

Mechanical seal
Graphite-Ceramic


Shaft
AISI 304 SS-ASTM 5140

Seal lubricating oil
Oil for food machinery

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2850 /min

Redpump
Italy Standard

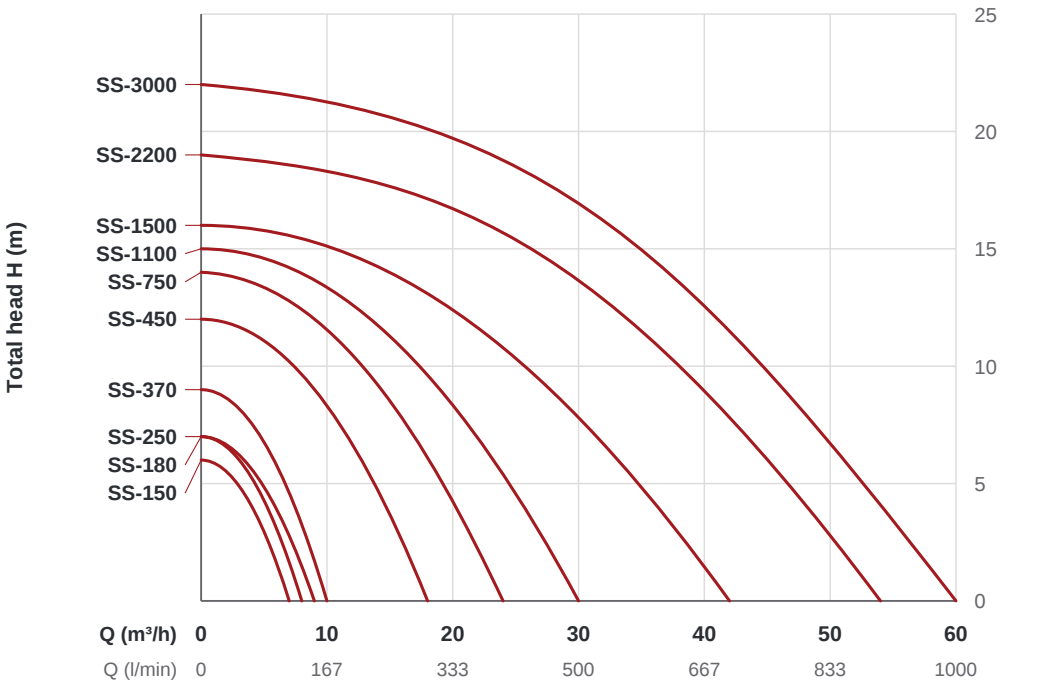

PERFORMANCE DATA

Q max = flow rate at H = 0

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	6	9	12	18	24	30	36	42	48	54	60	Q max
				l/min	0	100	150	200	300	400	500	600	700	800	900	1000	m³/h
THREE-PHASE 3~ 380–415 V																	
SS-150	0.15	0.2			6	1.6											**7**
SS-180	0.18	0.25			7	3.1											**8**
SS-250	0.25	0.33			7	3.9	0										**9**
SS-370	0.37	0.5			9	5.8	1.7										**10**
SS-450	0.45	0.6			12	10.7	9	6.7	0								**18**
SS-750	0.75	1	**H (m)**		14	13.1	12	10.5	6.1	0							**24**
SS-1100	1.1	1.5			15	14.4	13.7	12.6	9.6	5.4	0						**30**
SS-1500	1.5	2			16	15.7	15.3	14.7	13.1	10.8	7.8	4.2	0				**42**
SS-2200	2.2	3			19	18.8	18.5	18.1	16.9	15.2	13.1	11.5	7.5	4	0		**54**
SS-3000	3	4			22	21.8	21.5	21.1	20	18.5	16.5	14.9	11.2	7.9	4.2	0	**60**
SINGLE-PHASE 1~ 220–240 V																	
SSM-150F	0.15	0.2			6	1.6											**7**
SSM-180F	0.18	0.25			7	3.1											**8**
SSM-250F	0.25	0.33			7	3.9	0										**9**
SSM-370F	0.37	0.5			9	5.8	1.7										**10**
SSM-450F	0.45	0.6			12	10.7	9	6.7	0								**18**
SSM-750F	0.75	1	**H (m)**		14	13.1	12	10.5	6.1	0							**24**
SSM-1100F	1.1	1.5			15	14.4	13.7	12.6	9.6	5.4	0						**30**
SSM-1500F	1.5	2			16	15.7	15.3	14.7	13.1	10.8	7.8	4.2	0				**42**
SSM-2200F	2.2	3			19	18.8	18.5	18.1	16.9	15.2	13.1	11.5	7.5	4	0		**54**
SSM-3000F	3	4			22	21.8	21.5	21.1	20	18.5	16.5	14.9	11.2	7.9	4.2	0	**60**

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
Available with float switch
Suitable for water containing fibers
Curve tolerance according to ISO 9906

OPERATING CONDITIONS

Maximum fluid temperature:
+50 °C

ON REQUEST

Special mechanical seal available on request.