


● Performance scope

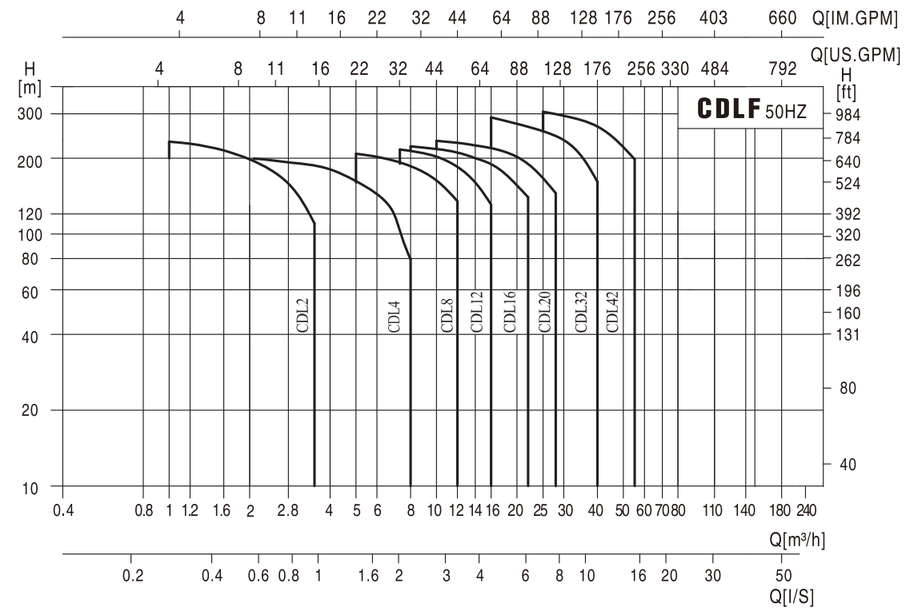

● Product range

Description	CDLF2	CDLF4	CDLF8	CDLF12	CDLF16	CDLF20	CDLF32	CDLF42
Rated flow[m³/h]	2	4	8	12	16	20	32	42
Rated flow[l/s]	0.56	1.1	2.2	3.3	4.4	5.6	8.9	11.7
Flow range[m³/h]	1-3.5	1.5-7	5-12	7-16	8-22	10-28	16-40	25-55
Flow range[l/s]	0.28-0.97	0.42-1.9	1.4-3.3	1.9-4.4	2.2-6.1	2.8-7.8	4.4-11.1	6.9-15.3
Max.pressure[bar]	23	21	21	22	22	23	29	30
Motor power[kW]	0.37-3	0.37-4	0.75-7.5	1.5-11	2.2-15	1.1-18.5	1.5-30	3.0-45
Temperature range[℃]	-15~+120							
Max.efficiency[%]	46	57	62	63	66	69	73	75
Type								
CDLF	●	●	●	●	●	●	●	●
CDLF Pipe connection								
DIN Flange	Dn25	Dn32	Dn40	DN50	DN50	DN50	DN65	DN80
Cutting ferrule joint	DN32	DN32	DN50	DN50	DN50	DN50		
Pipe thread	ZG1¼	ZG1¼	ZG2	ZG2	ZG2	ZG2		

● Pump

CDLF is a kind of vertical non-self priming multistage centrifugal pump, which is driven by a standard electric motor. The motor output shaft directly connects with the pump shaft through a coupling. The pres-sure-resistant cylinder and flow passage components are fixed between pump head and inlet &outlet section with stay bolts. The inlet and outlet are located at the pump bottom at the same plane. This kind of pump can be equipped with an intelligent protector to effectively prevent it from dry-running, out-of-phase and overload.

● Motor

Full-enclosed air-blast two-pole standard motor
Protection class: IP55
Insulation class: F
Standard voltage: 50Hz: 1×220-230/240V
3×200-220/346-380V
3×220-240/380-415V
3×380-415V