WC

PRODUCT NOMENCLATURE

50	WC	15	15	1.5
Outlet Size (mm)	Model	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)



RANGE CHARACTERISTICS

Power	**1.5-7.5kW**
Poles	**2**
Discharge	**DN50**
Max flow rate	**50 m^3/h**
Max head	**45 m**

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220 - 240V/50Hz
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

AQUARIS
MADE IN ITALY

WC

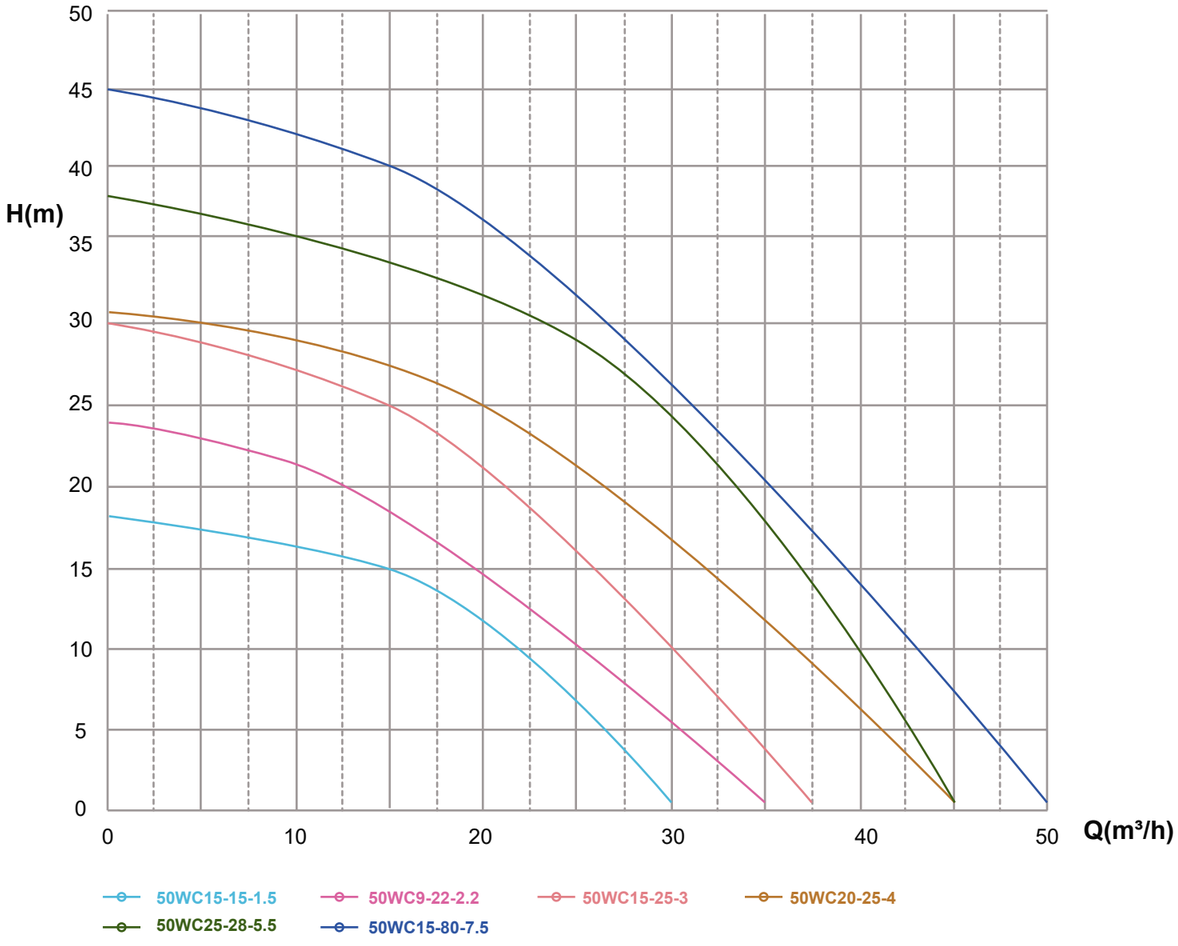

Type	Voltage (V)	Power (kW)	Power (HP)	Q (m^3/h) / Q (l/min)	0 / 0	5 / 83	10 / 167	15 / 250	20 / 333	25 / 417	30 / 500	35 / 583	40 / 667	45 / 750	50 / 833
50WC15-15-1.5	1Ph/220V	1.5	2	H(m)	18	17	16	15	12	7	1				
50WC15-15-1.5	3Ph/380V	1.5	2		18	17	16	15	12	7	1				
50WC9-22-2.2	1Ph/220V	2.2	3		24	23	21	18	15	10	5	1			
50WC9-22-2.2	3Ph/380V	2.2	3		24	23	21	18	15	10	5	1			
50WC15-25-3	3Ph/380V	3	4		30	29	27	25	21	16	8	4			
50WC20-25-4	3Ph/380V	4	5.5		31	30	29	27	25	21	17	12	6	1	
50WC25-28-5.5	3Ph/380V	5.5	7.5		38	37	35	33	32	28	24	17	10	1	
50WC15-40-7.5	3Ph/380V	7.5	10		45	44	43	40	36	32	26	20	14	7	1