MIX SERIES

SUBMERSIBLE MIXER · TECHNICAL DATA · 50 Hz

AQUARIS
MADE IN ITALY



0.4–2.2 kW
OUTPUT

108–408 m³/h
CAPACITY

1.78–3.5 m/s
FLOW SPEED

IP68
PROTECTION

APPLICATION

- Wastewater treatment in all industries
- River, pond and lake dredging
- Artificial water flow for amusement facilities
- Mixing and agitating impurities in water


MOTOR

- Power supply: 3~ 380–415 V, 50 Hz
- Insulation class: F
- Protection: IP68
- Built-in motor overload protector
- Motor type: Submersible dry type

OPERATING CONDITIONS

- Liquid temperature: 0–40 °C

CONSTRUCTION

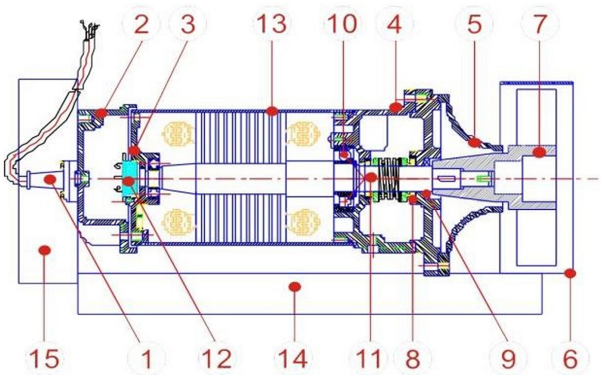

SPECIFICATIONS

MODEL		MIX-0.4	MIX-0.75	MIX-1.1	MIX-1.5	MIX-2.2
Output	kW	0.4	0.75	1.1	1.5	2.2
Output	HP	0.55	1	1.5	2	3
Poles		4	4	4	4	4
Capacity	m³/h	108	192	240	270	408
Flow speed	m/s	1.78	2.02	2.8	2.5	3.5

MATERIALS

NO.	NAME	MATERIAL
1	Cable	UL STOW
2	Motor upper cover	FC200
3	Bearing housing	FC200
4	Bracket	FC200
5	Inlet housing	FC200
6	Jet ring	SUS304
7	Mixer impeller	FCD450
8	Mechanical seal	SIC/SIC
9	Oil seal	VITON
10	Bearing	High quality
11	Shaft	SUS304
12	Overload protector	High quality
13	Motor housing	SUS304
14	Support base	SUS304
15	Seat for guide rail device	SUS304