
perotac
MADE IN TAIWAN

SUBMERSIBLE MIXER

4MIX SERIES | ALL STAINLESS STEEL | 50 Hz

APPLICATION

- Wastewater treatment in all industries
- River, pond and lake dredging
- Artificial water flow for amusement facilities
- Mixing and agitating impurities in water

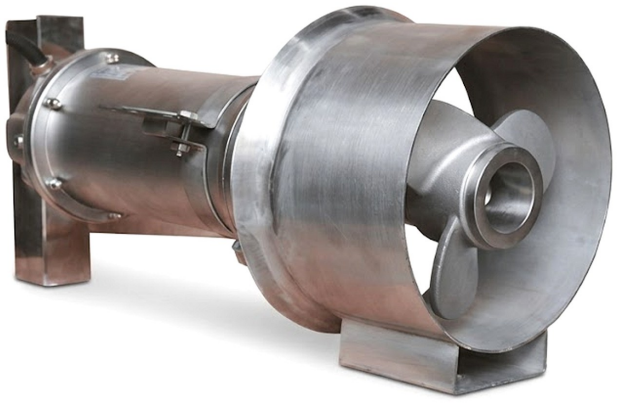

MOTOR

- Power supply: 3~ 380–415 V, 50 Hz
- Insulation class: F
- Protection: IP68
- Duty: S1 (continuous)
- Built-in motor overload protector
- Motor type: Submersible dry type


OPERATING CONDITIONS

- Liquid temperature: 0–40 °C
- Liquid density: max. 1050 kg/m³
- pH value: 5–9
- Max. submergence depth: 20 m
- Installation: submersible, horizontal

SPECIFICATIONS

MODEL	OUTPUT		POLES	CAPACITY	FLOW SPEED
	kW	HP		m³/h	m/s
4MIX-0.4	0.4	0.55	4	108	1.78
4MIX-0.75	0.75	1	4	192	2.02
4MIX-1.1	1.1	1.5	4	240	2.8
4MIX-1.5	1.5	2	4	270	2.5
4MIX-2.2	2.2	3	4	408	3.5

CONSTRUCTION AND MATERIALS

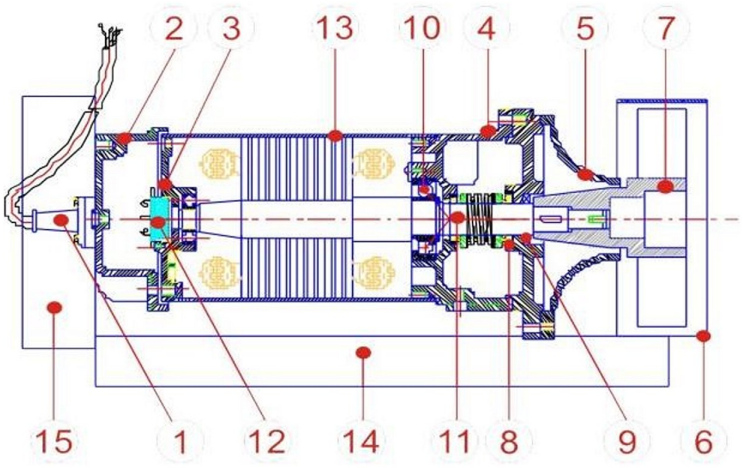

NO.	NAME	MATERIAL
1	Cable	UL STOW
2	Motor upper cover	SUS304
3	Bearing housing	SUS304
4	Bracket	SUS304
5	Inlet housing	SUS304
6	Jet ring	SUS304
7	Mixer impeller	SUS304
8	Mechanical seal	SIC/SIC
9	Oil seal	VITON
10	Bearing	High quality
11	Shaft	SUS304
12	Overload protector	High quality
13	Motor housing	SUS304
14	Support base	SUS304
15	Seat for guide rail device	SUS304