WC SERIES

50WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**1.5 – 7.5 kW**
Poles	**2**
Discharge	**DN50**
Max. flow rate	**50 m³/h**
Max. head	**45 m**
Speed	**n ≈ 2900 /min**

PRODUCT NOMENCLATURE


50	WC	15	15	1.5
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

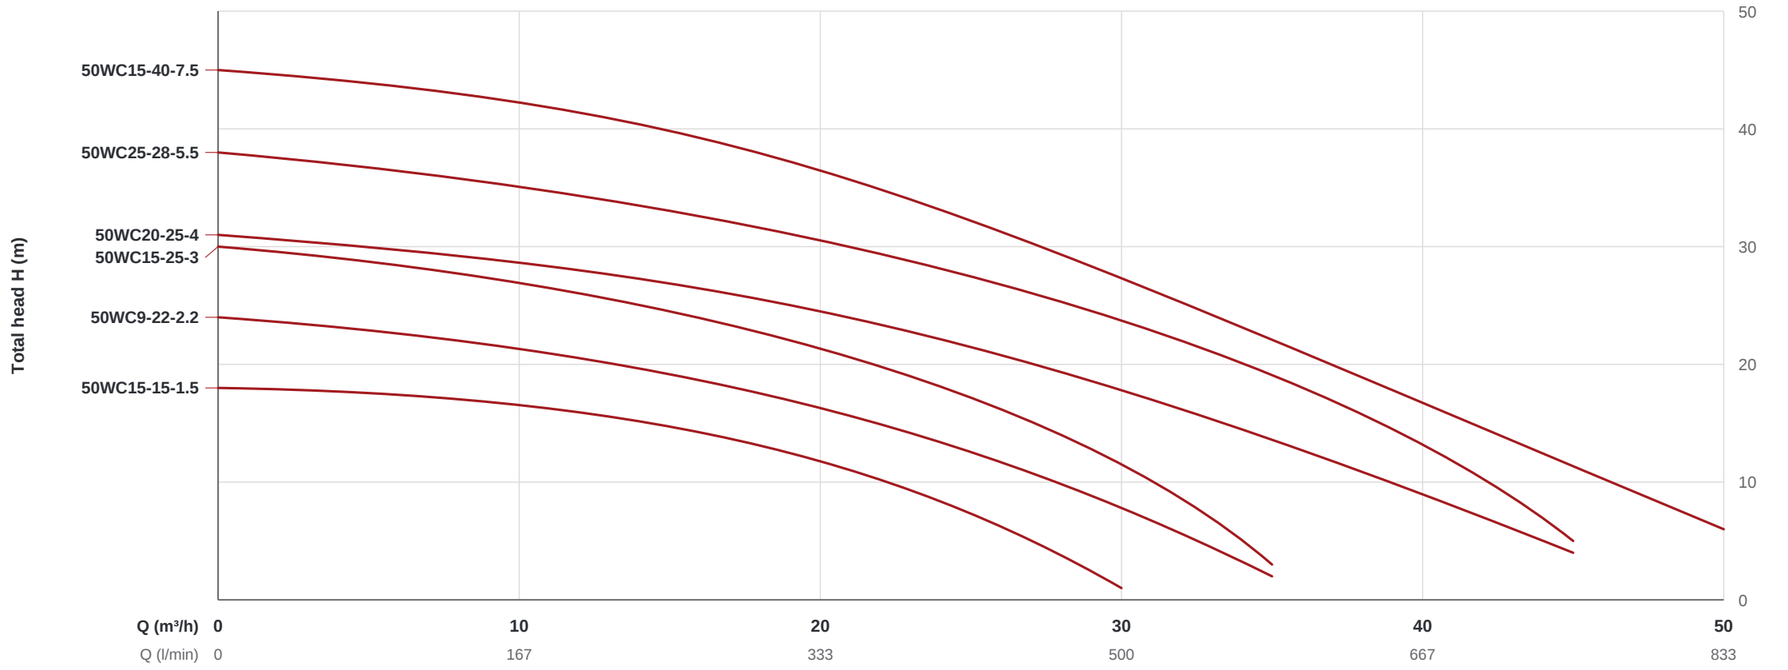

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	5	10	15	20	25	30	35	40	45	50
				l/min	0	83	167	250	333	417	500	583	667	750	833
THREE-PHASE 3~ 380–415 V															
50WC15-15-1.5	1.5	2	H (m)		18	18	17	15	12	7	1				
50WC9-22-2.2	2.2	3			24	23	22	19	16	12	8	2			
50WC15-25-3	3	4			30	29	28	25	21	17	11	3			
50WC20-25-4	4	5.5			31	31	29	28	25	22	18	13	9	4	
50WC25-28-5.5	5.5	7.5			38	38	36	34	32	28	23	19	13	5	
50WC15-40-7.5	7.5	10			45	44	42	40	36	32	28	22	16	11	6
SINGLE-PHASE 1~ 220–240 V															
50WCD15-15-1.5	1.5	2	H (m)		18	18	17	15	12	7	1				
50WCD9-22-2.2	2.2	3			24	23	22	19	16	12	8	2			

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WC SERIES

65WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**1.5 – 7.5 kW**
Poles	**2**
Discharge	**DN65**
Max. flow rate	**65 m³/h**
Max. head	**45 m**
Speed	**n ≈ 2900 /min**


PRODUCT NOMENCLATURE

65	WC	25	10	1.5
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

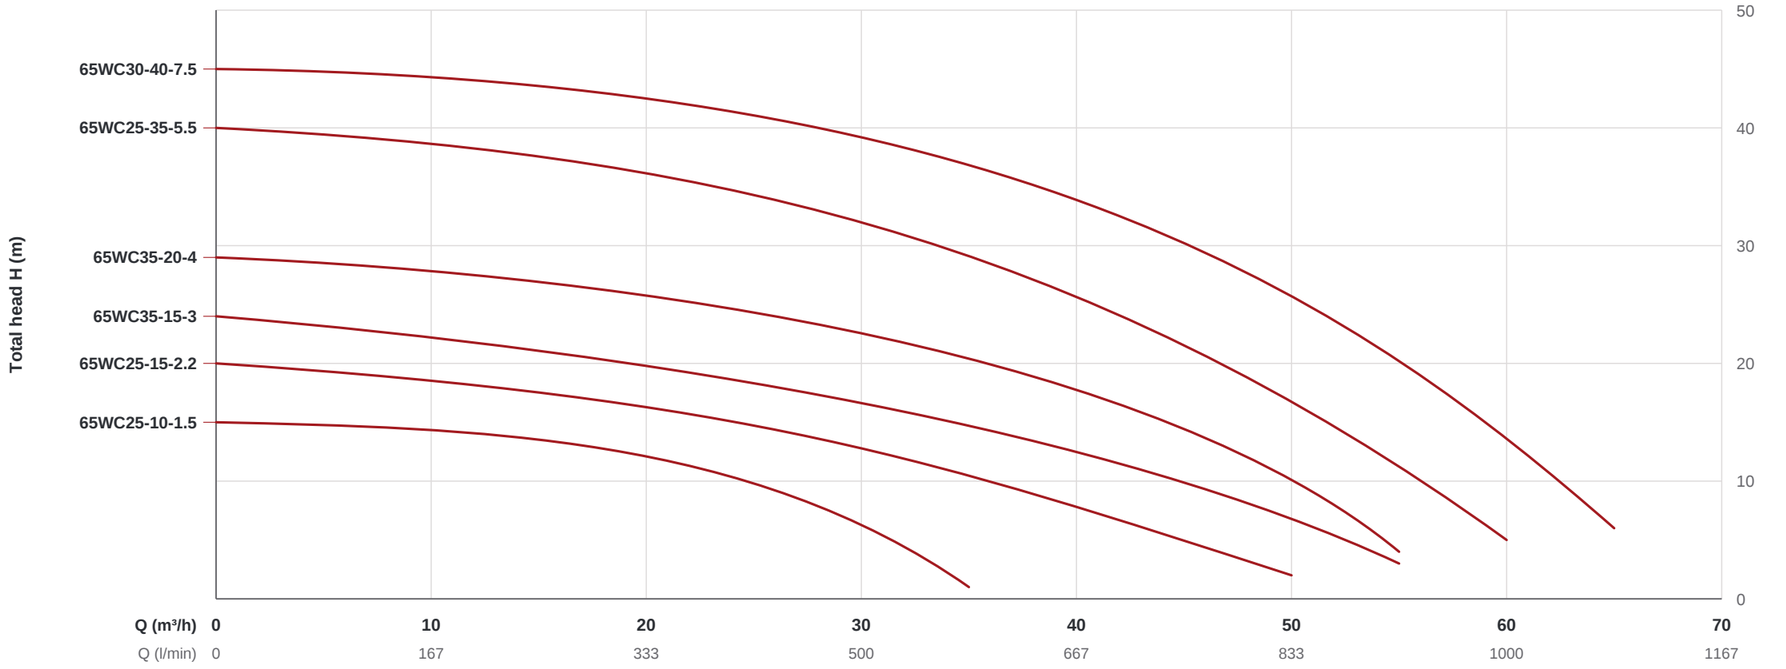

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q m³/h	0	5	10	15	20	25	30	35	40	45	50	55	60	65
			l/min	0	83	167	250	333	417	500	583	667	750	833	917	1000	1083
THREE-PHASE 3~ 380–415 V																	
65WC25-10-1.5	1.5	2	H (m)	15	15	15	14	12	10	6	1						
65WC25-15-2.2	2.2	3		20	20	19	18	17	15	13	10	8	5	2			
65WC35-15-3	3	4		24	24	23	22	20	19	17	15	12	10	7	3		
65WC35-20-4	4	5.5		29	29	29	28	27	25	23	20	17	14	10	4		
65WC25-35-5.5	5.5	7.5		40	40	39	38	37	35	33	30	26	21	16	11	5	
65WC30-40-7.5	7.5	10		45	45	45	44	43	42	40	37	34	30	26	20	13	6
SINGLE-PHASE 1~ 220–240 V																	
65WCD25-10-1.5	1.5	2	H (m)	15	15	15	14	12	10	6	1						
65WCD25-15-2.2	2.2	3		20	20	19	18	17	15	13	10	8	5	2			

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WC SERIES

80WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**2.2 – 9.5 kW**
Poles	**2**
Discharge	**DN80**
Max. flow rate	**120 m³/h**
Max. head	**40 m**
Speed	**n ≈ 2900 /min**


PRODUCT NOMENCLATURE

80	WC	45	9	2.2
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

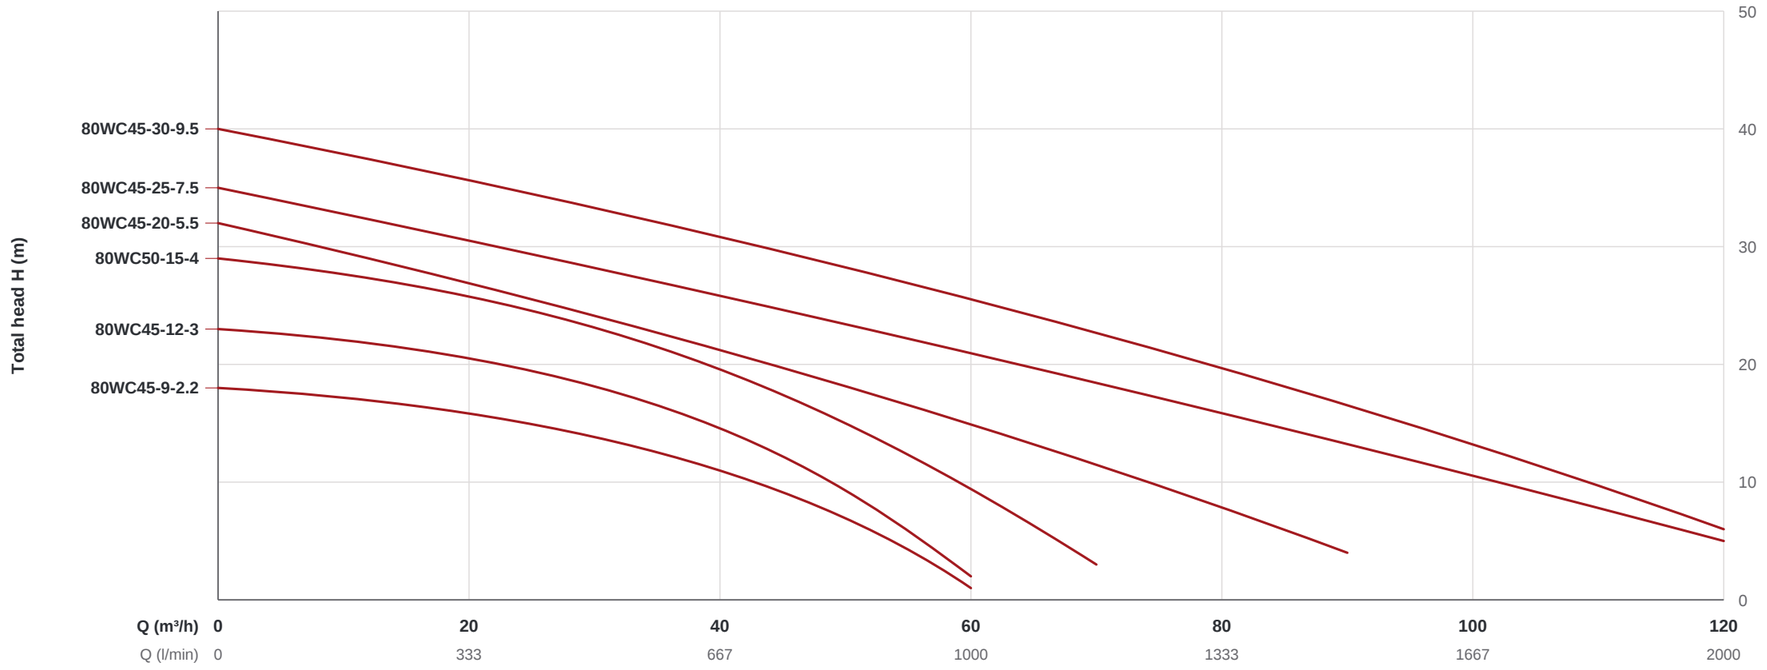

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	10	20	30	40	50	60	70	80	90	100	110	120
				l/min	0	167	333	500	667	833	1000	1167	1333	1500	1667	1833	2000
THREE-PHASE 3~ 380–415 V																	
80WC45-9-2.2	2.2	3			18	18	16	14	11	7	1						
80WC45-12-3	3	4			23	23	21	19	15	9	2						
80WC50-15-4	4	5.5	**H (m)**		29	28	27	24	20	15	9	3					
80WC45-20-5.5	5.5	7.5			32	30	28	25	22	18	15	11	8	4			
80WC45-25-7.5	7.5	10			35	33	31	29	26	24	21	18	16	13	11	8	5
80WC45-30-9.5	9.5	13			40	38	36	34	31	29	26	23	19	16	13	10	6
SINGLE-PHASE 1~ 220–240 V																	
80WCD45-9-2.2	2.2	3	**H (m)**		18	18	16	14	11	7	1						

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WC SERIES

100WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**4 – 22 kW**
Poles	**2**
Discharge	**DN100**
Max. flow rate	**240 m³/h**
Max. head	**65 m**
Speed	**n ≈ 2900 /min**

PRODUCT NOMENCLATURE


100	WC	65	12	4
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

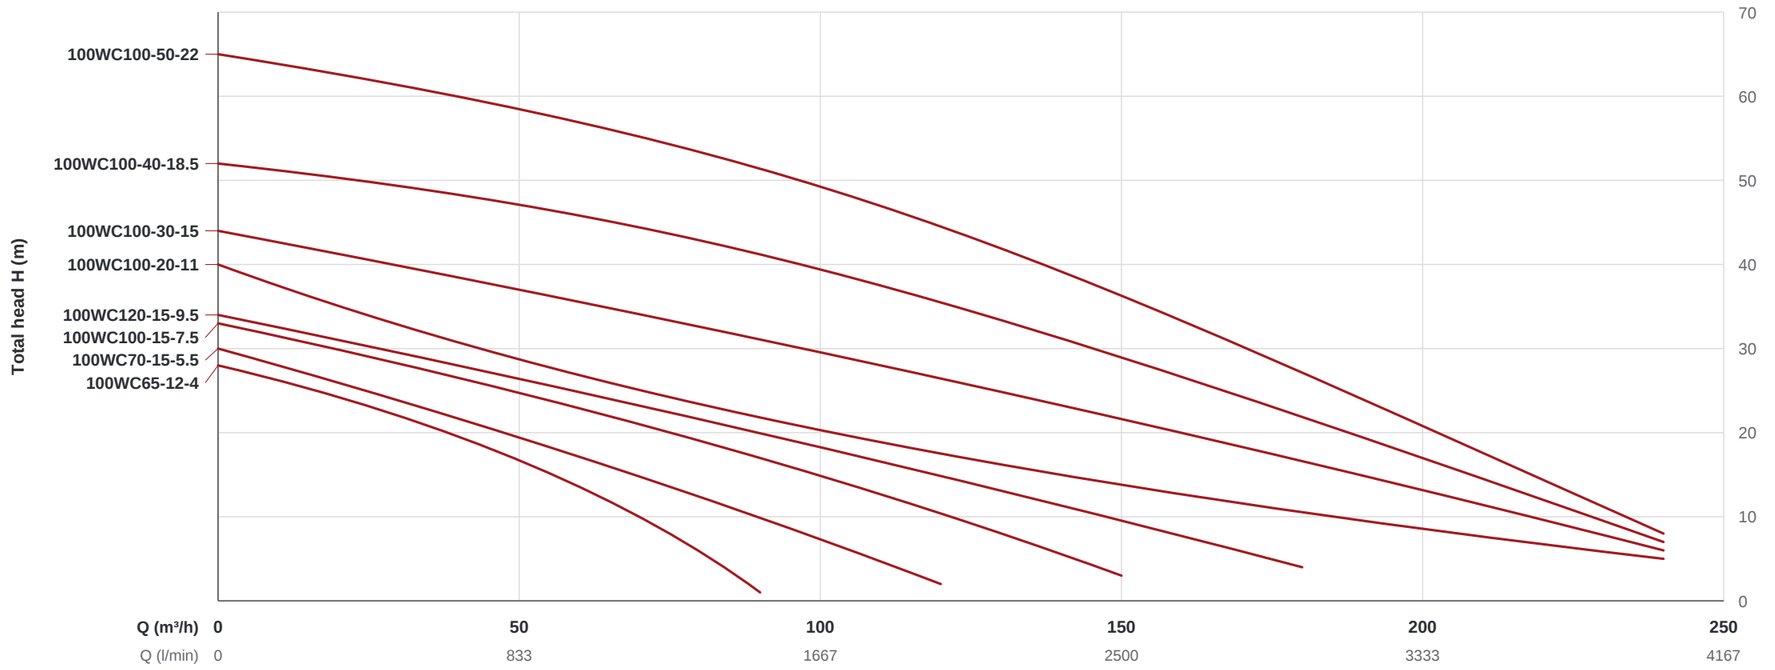

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q m³/h / l/min	0 / 0	30 / 500	60 / 1000	90 / 1500	120 / 2000	150 / 2500	180 / 3000	210 / 3500	240 / 4000
THREE-PHASE 3~ 380–415 V												
100WC65-12-4	4	5.5	H (m)	28	23	14	1					
100WC70-15-5.5	5.5	7.5		30	24	17	10	2				
100WC100-15-7.5	7.5	10		33	29	24	17	10	3			
100WC120-15-9.5	9.5	13		34	30	25	20	15	10	4		
100WC100-20-11	11	15		40	34	27	22	17	14	11	8	5
100WC100-30-15	15	20		44	40	36	32	27	21	17	11	6
100WC100-40-18.5	18.5	25		52	49	46	41	35	29	22	15	7
100WC100-50-22	22	30		65	62	58	52	45	37	26	17	8

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WC SERIES

150WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**5.5 – 22 kW**
Poles	**2**
Discharge	**DN150**
Max. flow rate	**360 m³/h**
Max. head	**44 m**
Speed	**n ≈ 2900 /min**

PRODUCT NOMENCLATURE


150	WC	100	10	5.5
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

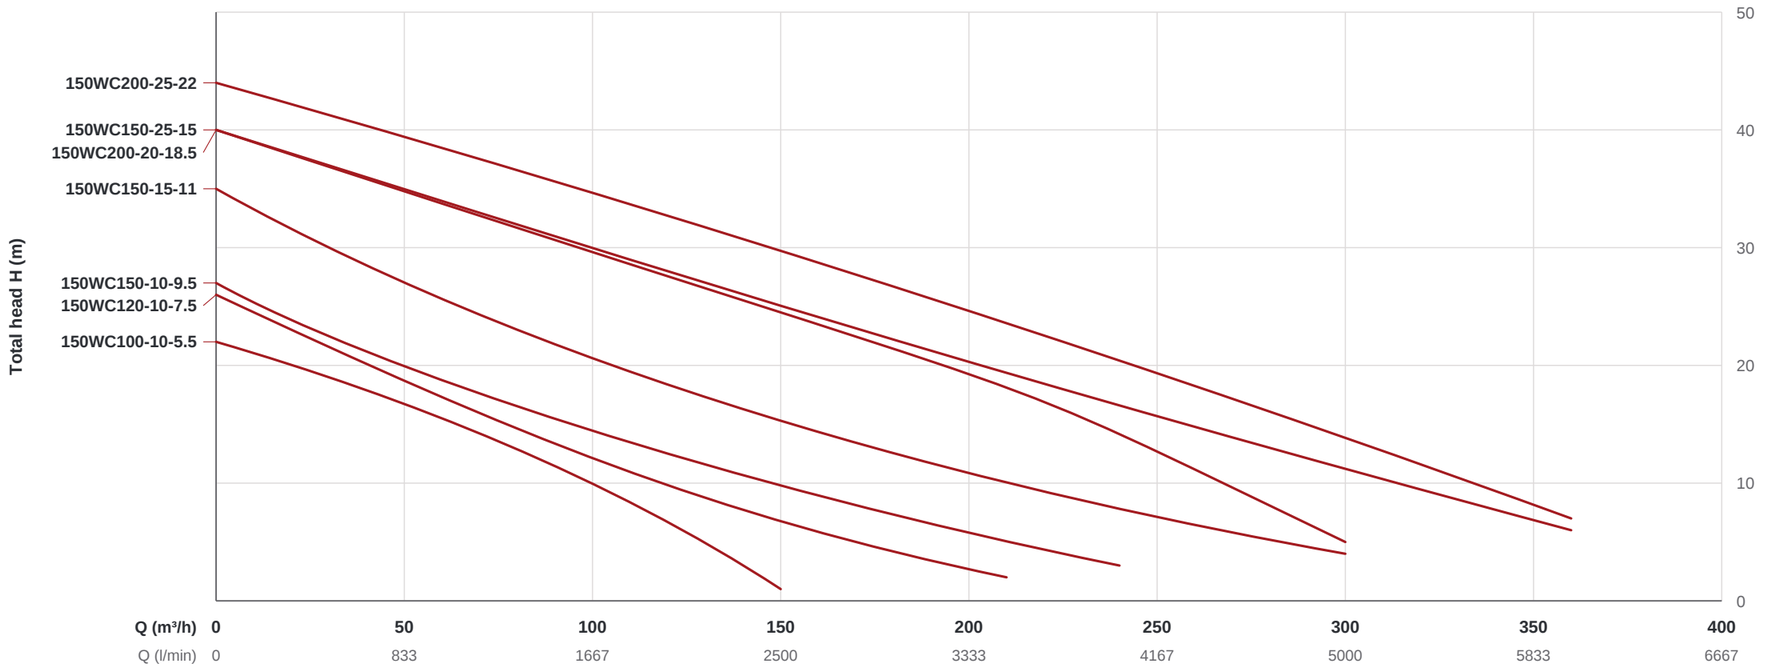

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q m³/h	0	30	60	90	120	150	180	210	240	270	300	330	360
			Q l/min	0	500	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000
THREE-PHASE 3~ 380–415 V																
150WC100-10-5.5	5.5	7.5		22	19	16	12	7	1							
150WC120-10-7.5	7.5	10		26	22	17	14	10	7	4	2					
150WC150-10-9.5	9.5	13		27	22	18	15	13	10	7	5	3				
150WC150-15-11	11	15	H (m)	35	30	26	22	18	15	12	10	8	6	4		
150WC150-25-15	15	20		40	37	34	31	28	25	21	18	14	10	5		
150WC200-20-18.5	18.5	25		40	37	34	31	28	25	22	19	17	14	11	9	6
150WC200-25-22	22	30		44	42	40	37	34	31	27	24	20	17	14	10	7

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WC SERIES

200WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**11 – 30 kW**
Discharge	**DN200**
Max. flow rate	**600 m³/h**
Max. head	**32 m**
Speed	**n ≈ 1450 /min**


PRODUCT NOMENCLATURE

200	WC	200	9	11
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 1450 /min

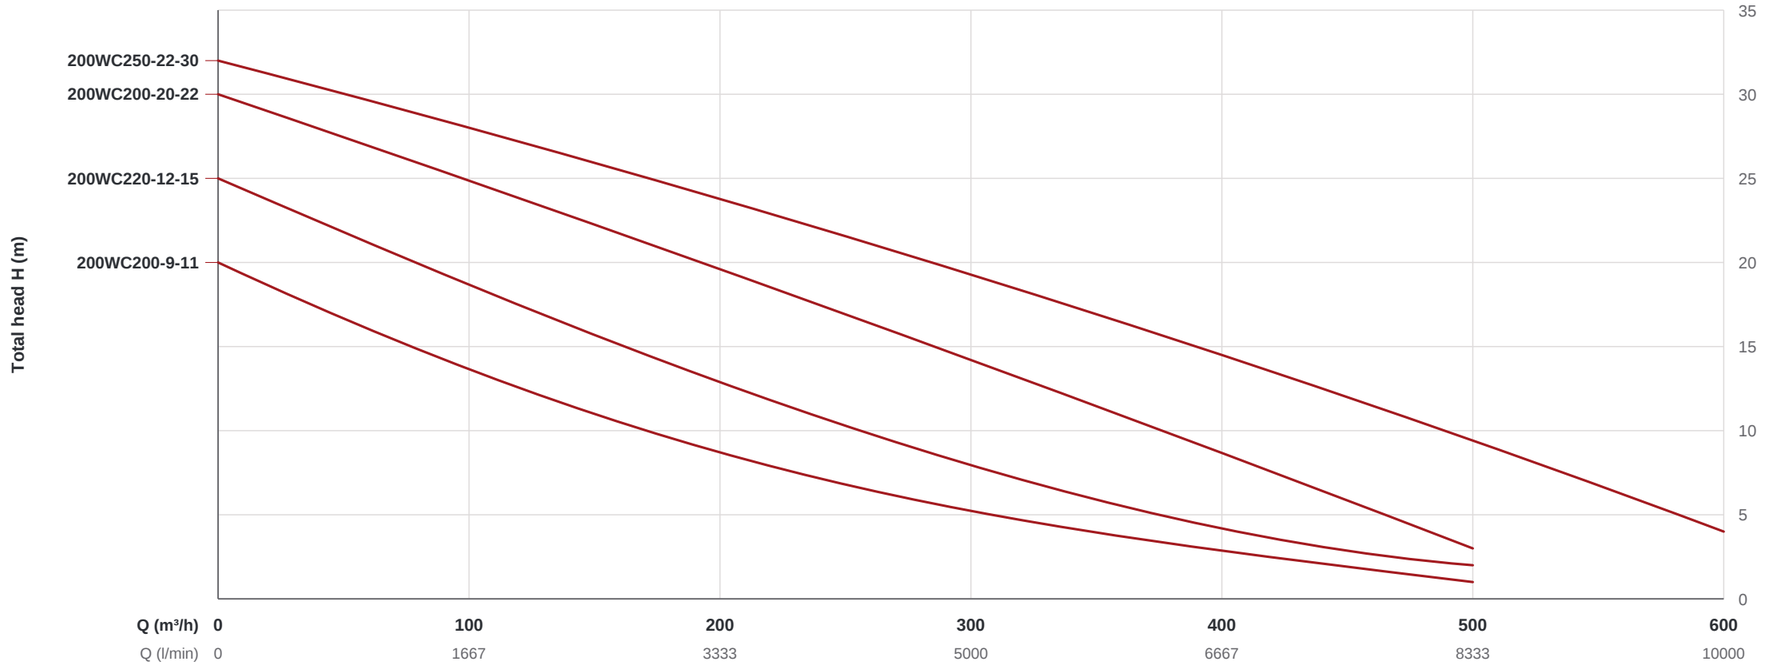

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	50	100	150	200	250	300	350	400	450	500	550	600
				l/min	0	833	1667	2500	3333	4167	5000	5833	6667	7500	8333	9167	10000
THREE-PHASE 3~ 380–415 V																	
200WC200-9-11	11	15	H (m)		20	17	14	11	9	7	5	4	3	2	1		
200WC220-12-15	15	20			25	22	19	16	13	10	8	6	4	3	2		
200WC200-20-22	22	30			30	28	25	23	20	17	14	11	9	6	3		
200WC250-22-30	30	40			32	30	28	26	24	22	19	17	14	12	9	7	4

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WC SERIES

250WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**30 – 45 kW**
Discharge	**DN250**
Max. flow rate	**1100 m³/h**
Max. head	**24 m**
Speed	**n ≈ 1450 /min**


PRODUCT NOMENCLATURE

250	WC	600	9	30
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 1450 /min

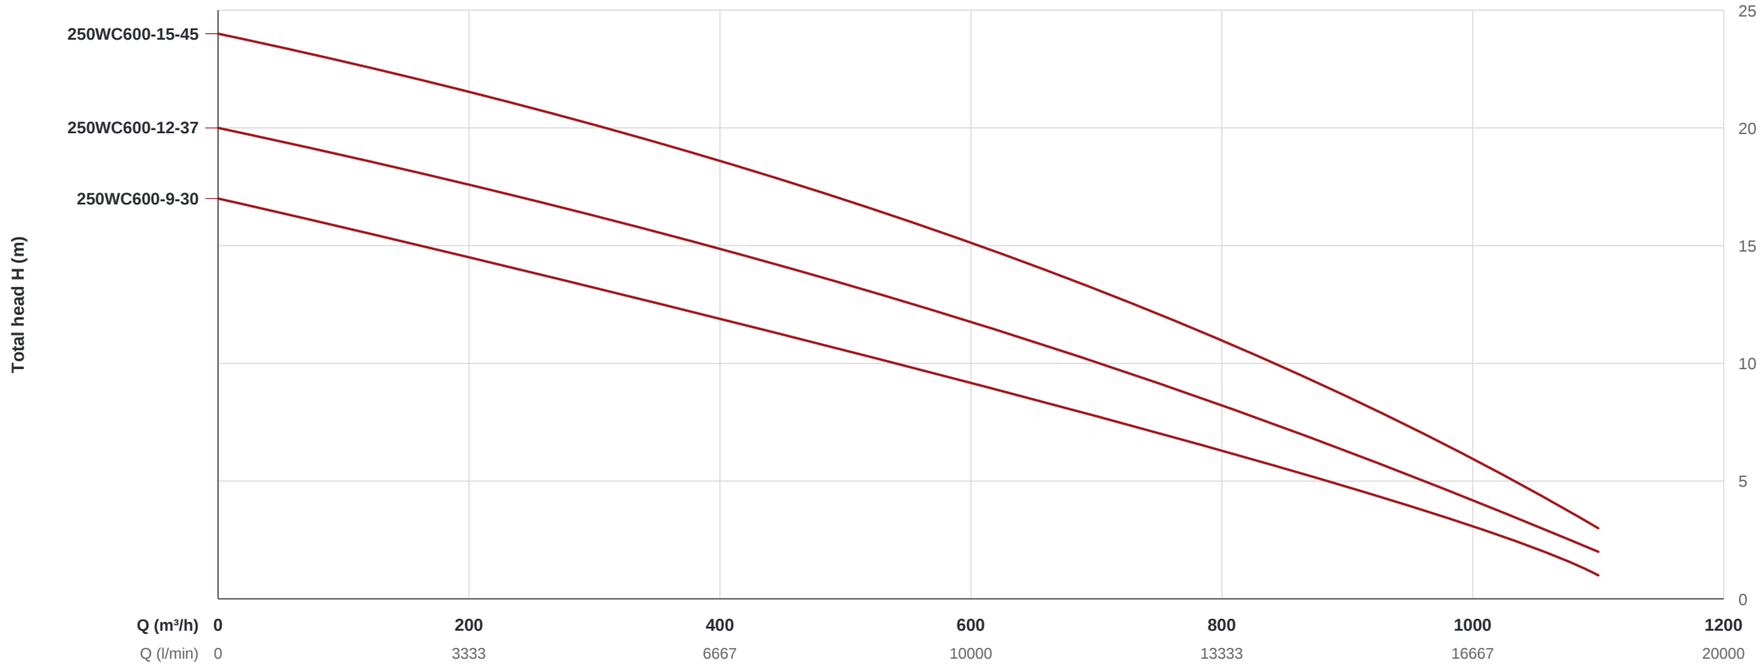

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	100	200	300	400	500	600	700	800	900	1000	1100
				l/min	0	1667	3333	5000	6667	8333	10000	11667	13333	15000	16667	18333
THREE-PHASE 3~ 380–415 V																
250WC600-9-30	30	40			17	16	15	13	12	11	9	8	6	5	3	1
250WC600-12-37	37	50	**H (m)**		20	19	18	17	15	14	12	10	8	6	4	2
250WC600-15-45	45	60			24	23	22	21	19	17	15	13	11	9	6	3

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WC SERIES

300WC

Submersible sewage pumps with cutter



RANGE CHARACTERISTICS

Power	**45 – 110 kW**
Discharge	**DN300**
Max. flow rate	**2600 m³/h**
Max. head	**34 m**
Speed	**n ≈ 1450 /min**


PRODUCT NOMENCLATURE

300	WC	800	12	45
Outlet size (mm)	Model	Rated flow (m³/h)	Rated head (m)	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 1450 /min

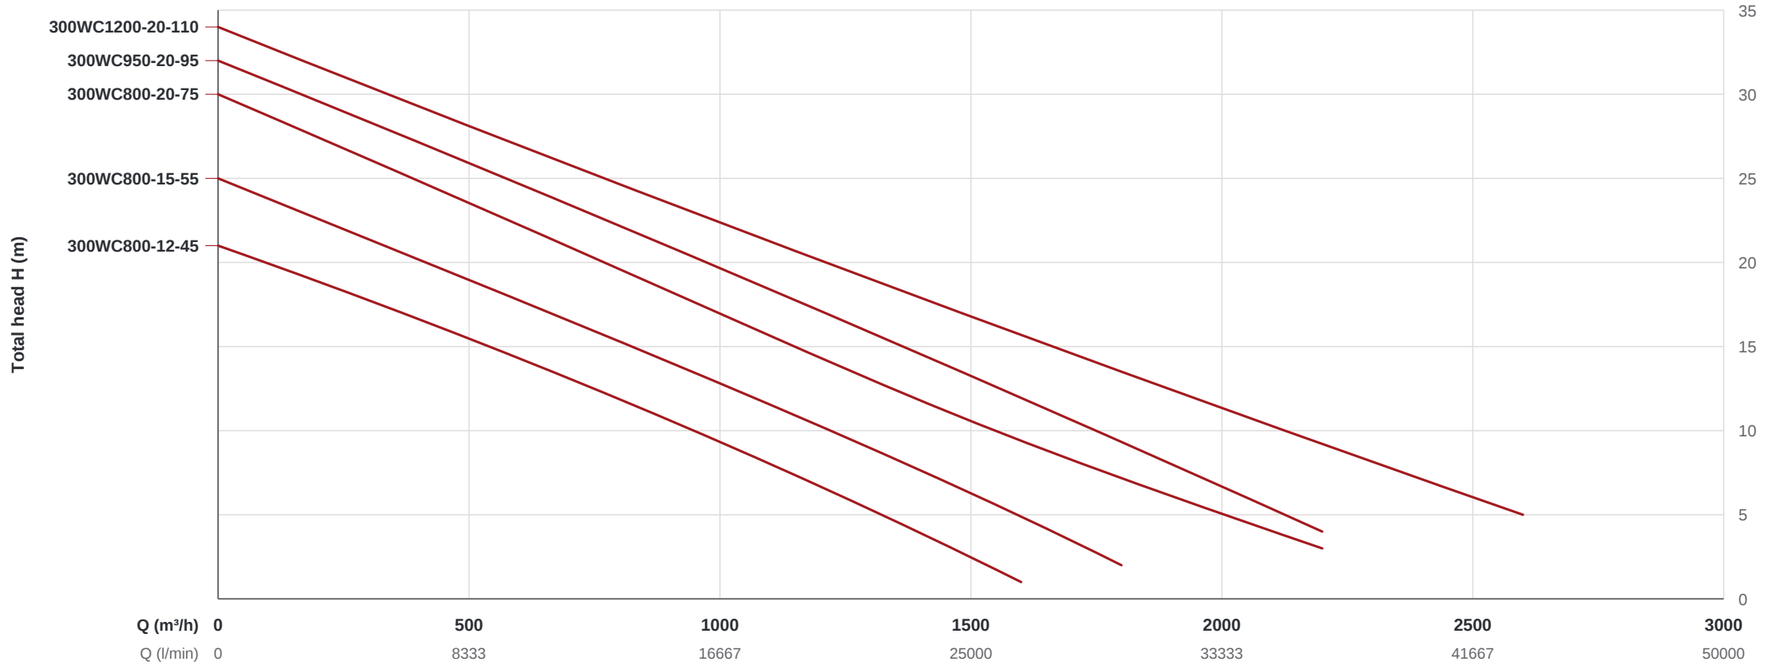

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600
				l/min	0	3333	6667	10000	13333	16667	20000	23333	26667	30000	33333	36667	40000	43333
THREE-PHASE 3~ 380–415 V																		
300WC800-12-45	45	60			21	19	17	14	12	9	7	4	1					
300WC800-15-55	55	75			25	23	20	18	15	13	10	8	5	2				
300WC800-20-75	75	100		**H (m)**	30	28	25	23	20	17	15	12	9	7	5	3		
300WC950-20-95	95	130			32	30	27	25	22	19	17	14	12	9	7	4		
300WC1200-20-110	110	150			34	32	30	27	25	23	20	18	15	14	11	9	7	5

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS / MOTOR AND PUMP

Maximum fluid temperature up to +40 °C
Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use