4MIX SERIES

4MIX

Stainless steel submersible mixer

0.4–2.2 kW
OUTPUT

108–408 m³/h
CAPACITY

1.78–3.5 m/s
FLOW SPEED

SUS304
BODY MATERIAL

APPLICATION

- Wastewater treatment in all industries
- River, pond and lake dredging
- Artificial water flow for amusement facilities
- Mixing and agitating impurities in water


MOTOR

- Power supply: 3~ 380–415 V, 50 Hz
- Insulation class: F
- Protection: IP68
- Duty: S1 (continuous)
- Built-in motor overload protector
- Motor type: Submersible dry type

SUBMERSIBLE MIXER

ALL STAINLESS STEEL | 50 Hz

Redpump
Italy Standard

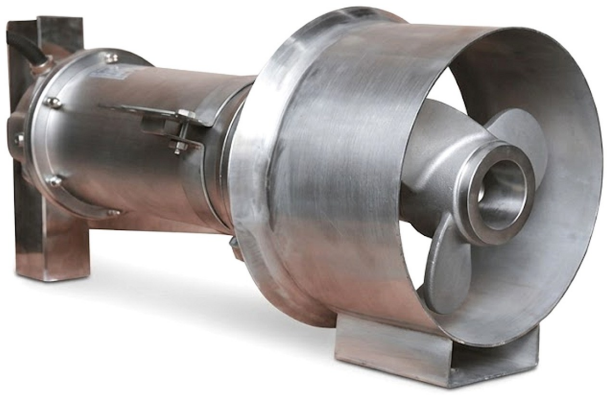


OPERATING CONDITIONS

- Liquid temperature: 0–40 °C
- Liquid density: max. 1050 kg/m³
- pH value: 5–9
- Max. submergence depth: 20 m
- Installation: submersible, horizontal

SPECIFICATIONS

MODEL	OUTPUT kW	OUTPUT HP	POLES	CAPACITY m³/h	FLOW SPEED m/s
4MIX-0.4	0.4	0.55	4	108	1.78
4MIX-0.75	0.75	1	4	192	2.02
4MIX-1.1	1.1	1.5	4	240	2.8
4MIX-1.5	1.5	2	4	270	2.5
4MIX-2.2	2.2	3	4	408	3.5

CONSTRUCTION

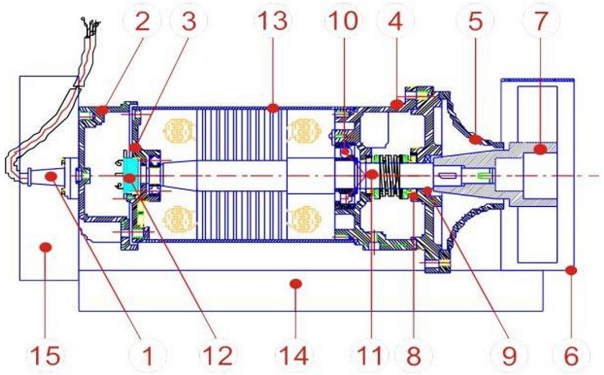

NO.	NAME	MATERIAL
1	Cable	**UL STOW**
2	Motor upper cover	**SUS304**
3	Bearing housing	**SUS304**
4	Bracket	**SUS304**
5	Inlet housing	**SUS304**
6	Jet ring	**SUS304**
7	Mixer impeller	**SUS304**
8	Mechanical seal	**SIC/SIC**

NO.	NAME	MATERIAL
9	Oil seal	**VITON**
10	Bearing	**High quality**
11	Shaft	**SUS304**
12	Overload protector	**High quality**
13	Motor housing	**SUS304**
14	Support base	**SUS304**
15	Seat for guide rail device	**SUS304**