RM-3052
RM-313
RM-325
RM-337




MATERIAL AND STANDARD TABLE

	Caliber		50mm • 80mm
Liquid	Temperature		0°C~40°C(32°F~104°F)
	Application		Draining at civil engineering or building sites. Draining storm water, groundwater, or puddles. Draining from basements or utility pits.
Pump	Material	Upper Cover	FC-200
		Bracket	FC-200
		Impeller	FCD-450
		Motor Bracket	FC-200
		Mechanical Seal Bracket	FC-200
		Bottom Plate	SS41
Motor	Type		Submersible dry type
	Inner protector		Auto Reset Motor Protector
	Material	Casing	SUS-304
		Main Shaft	SUS-304
		Cable	VCT


APPLICATION

1.Biological treatment tanks.
2.Equalization tanks.
3.Lime slurry storage tanks.
4.Ponds and rivers water circulations.
5.Heat exchanger
6.Ice prevention

STRUCTURAL DRAWING

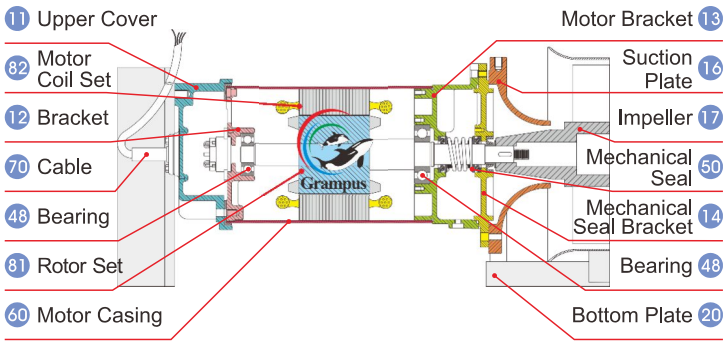

DIMENSIONS(Guide bar installation)

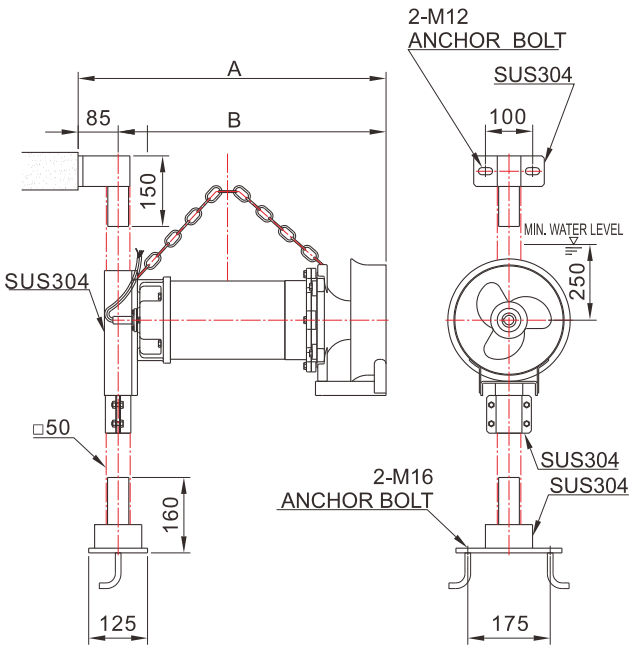

SPECIFICATION

Type	Phase	Voltage	Power		Pole	Capacity	Flow Speed	Dimension(mm)		Remark
TYPE	PH	VOLT	HP	KW	P	M^3/min	M/s	A	B	REM
RM-3052	3Ø	220/380	½	0.4	4P	1.8	1.78	480	395	
RM-313	3Ø	220/380	1	0.75	4P	3.2	2.02	510	425	
RM-325	3Ø	220/380	2	1.5	4P	4.5	2.50	632	567	
RM-337	3Ø	220/380	3	2.2	4P	6.8	3.50	652	587	