



SM 型潜水搅拌机 Submersible mixer

设计
适用于潜水安装的搅拌机

产品应用
主要应用在市政工程和工业污水处理过程中的混合、搅拌和环流，也可用于景观水环境的养护，通过搅拌达到创建水流的作用，从而改善水体质量，增加水中含氧量，并能有效阻止悬浮物的沉淀。

型号说

SM	系列名称
	叶轮直径（mm）
	叶轮转速
	电机部件
	电机级数
	电机功率(kW)
	D=直连式结构
	主机材质: G=HT200; S=0Cr19Ni9; T= 022Cr17Ni12Mo2
	安装系统材质：C=碳钢；S=0Cr19Ni9; T= 022Cr17Ni12Mo2

Design
Mixer for submersible installation.

Product application
The mixer suitable for diving installation is mainly used for mixing, mixing and circulation in the process of municipal engineering and industrial sewage treatment. It can also be used for the maintenance of landscape water environment. It can create water flow through mixing, so as to improve the water quality, increase the oxygen content in the water and effectively prevent the sedimentation of suspended solids.

Type description

SM	Product Family
	Impeller diameter(mm)
	Impeller speed
	Motor components
	Number of motor poles
	Power of motor(kW)
	D= Direct connection structure
	Body material: G= Grey iron; S=SUS304; T= Carbon steel;
	Installation system material: S=SUS304; T= SUS316L

产品特点

高质量进口全封闭自润滑轴承，使用寿命长。

特殊电缆制作工艺，可完全防止电缆表皮破损时或者电缆前端侵入水中时，水通过每相线与线之间细小的缝隙进入电机内部，导致电机损坏。

两道独立的机械密封，保证潜水电机长期可靠运行。
叶轮由精铸轮毂、冲压叶片焊接而成，经 CFD 软件优化设计的叶片呈后掠式，效率高，具有自清洁功能。

经优化水力设计的导流罩，即减少震动，且大幅度增加轴向搅拌距离。
搅拌机内部设有泄露传感器和定子绕组超温探测装置（PTC）。

Product features

High quality imported fully enclosed self-lubricating bearing with long service life.
The special cable manufacturing process can completely prevent the water from entering the motor through the small gap between each phase line and line when the cable skin is damaged or the front end of the cable invades the water, resulting in the damage of the motor.
Two independent mechanical seals ensure long-term reliable operation of submersible motor.
The impeller is welded by precision casting hub and stamping blade. The blade optimized by CFD software is swept back, with high efficiency and self-cleaning function.
Adopt mechanical seal, no water leakage and long service life.
The mixer is equipped with leakage sensor and stator winding overtemperature detection device (PTC).


技术数据

电源：3φ 380V 50Hz
工作制式：S1
防护等级：IP68
绝缘等级：F 级（H 级为选配）
介质温度：≤40℃
环境温度：0-40℃
密度：小于 $1.05\times10^3 kg/m^3$
PH 值：5-9
安装方式：潜水卧式安装
最大淹没深度：20m


Technical data

Power Supply：Three-phase 380V 50Hz
Working mode: S1
Protectio grade: IP68
Insulation class：Class F (Class H is optional)
Temperature range [°C]：≤40℃
Environment temperature：0-40℃
Density: Less than $1.05\times10^3 kg/m^3$
PH value：5-9
Installation mode：Submersible horizontal installation
Maximum submergence depth: 20m


结构简图 Structure diagram

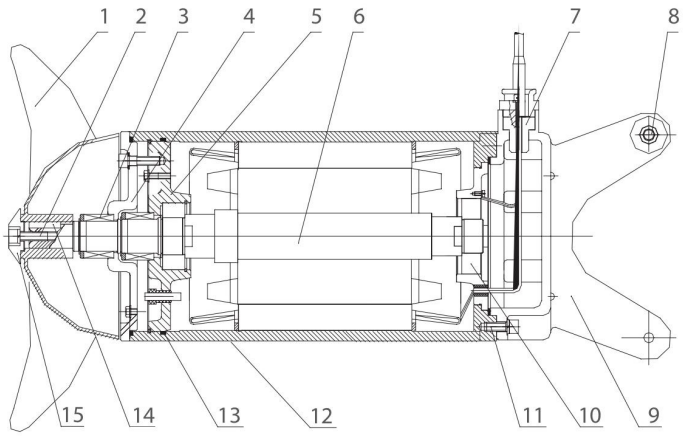


流场图 Flow field diagram

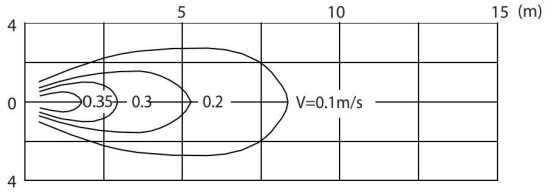


SM220/450S

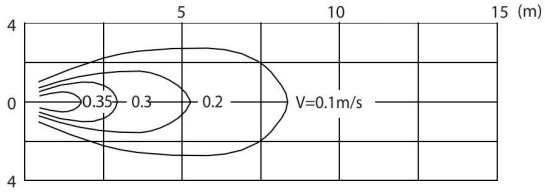


SM220/450T

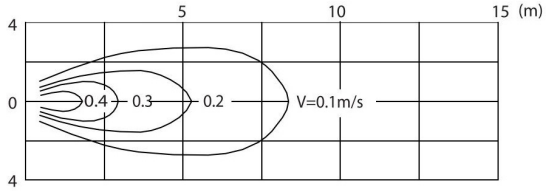


SM220/750S

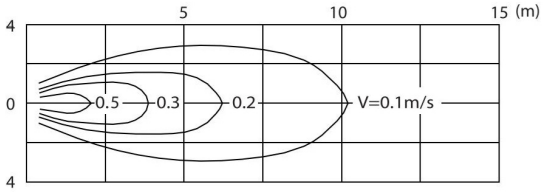


SM220/1500S

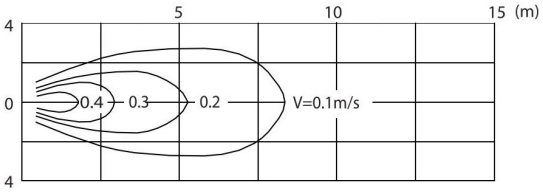


SM220/750T

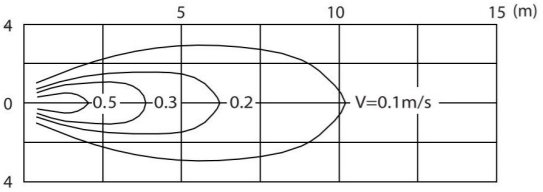


SM220/1500T

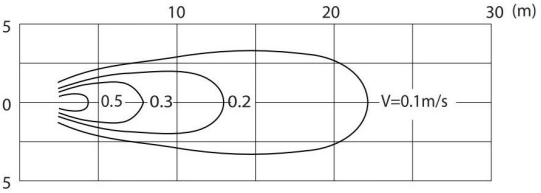


SM260/2200S

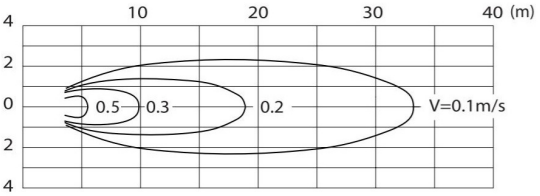

SM260/3000S

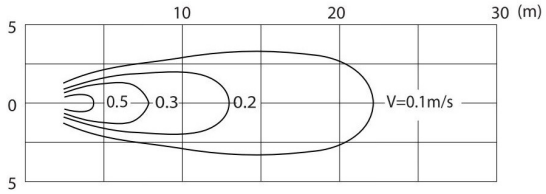

SM260/2200T

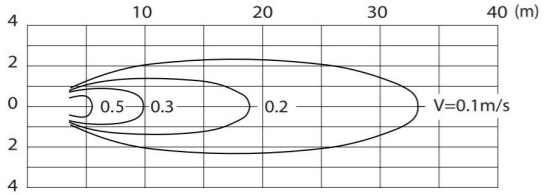

SM260/3000T