WC

PRODUCT NOMENCLATURE

50	WC	15	15	1.5
Outlet Size (mm)	Model	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)



RANGE CHARACTERISTICS

Power	**1.5-7.5kW**
Poles	**2**
Discharge	**DN50**
Max flow rate	**50 m^3/h**
Max head	**45 m**

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220 - 240V/50Hz
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

AQUARIS
MADE IN ITALY

WC

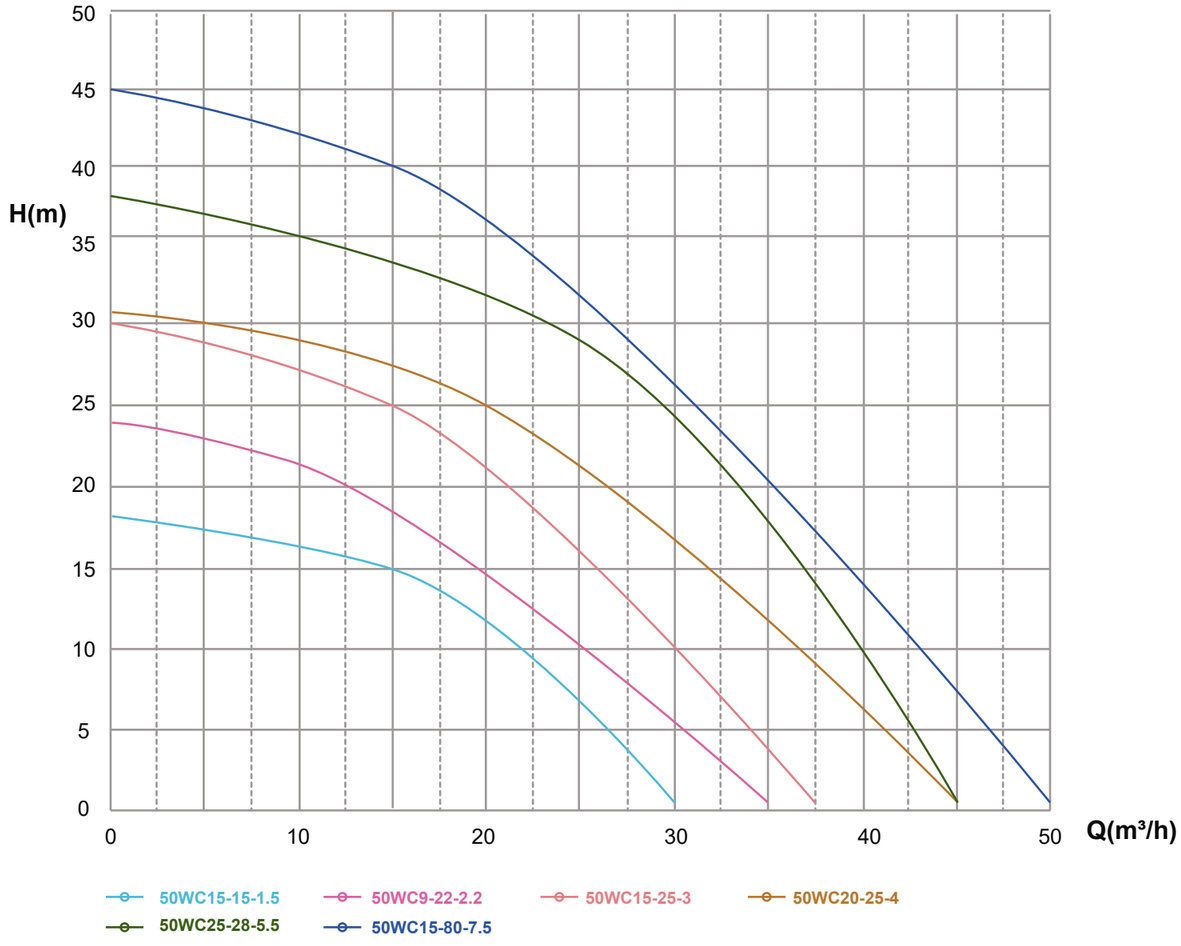

Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h)	0	5	10	15	20	25	30	35	40	45	50
				Q (l/min)	0	83	167	250	333	417	500	583	667	750	833
50WC15-15-1.5	1Ph/220V	1.5	2	H(m)	18	17	16	15	12	7	1				
50WC15-15-1.5	3Ph/380V	1.5	2		18	17	16	15	12	7	1				
50WC9-22-2.2	1Ph/220V	2.2	3		24	23	21	18	15	10	5	1			
50WC9-22-2.2	3Ph/380V	2.2	3		24	23	21	18	15	10	5	1			
50WC15-25-3	3Ph/380V	3	4		30	29	27	25	21	16	8	4			
50WC20-25-4	3Ph/380V	4	5.5		31	30	29	27	25	21	17	12	6	1	
50WC25-28-5.5	3Ph/380V	5.5	7.5		38	37	35	33	32	28	24	17	10	1	
50WC15-40-7.5	3Ph/380V	7.5	10		45	44	43	40	36	32	26	20	14	7	1

WC

PRODUCT NOMENCLATURE

65	WC	25	10	1.5
Outlet Size (mm)	Model	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)

RANGE CHARACTERISTICS

Power	**1.5-7.5kW**
Poles	**2**
Discharge	**DN65**
Max flow rate	**60 m^3/h**
Max head	**36 m**

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation



OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220 - 240V/50Hz
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

AQUARIS
MADE IN ITALY

WC

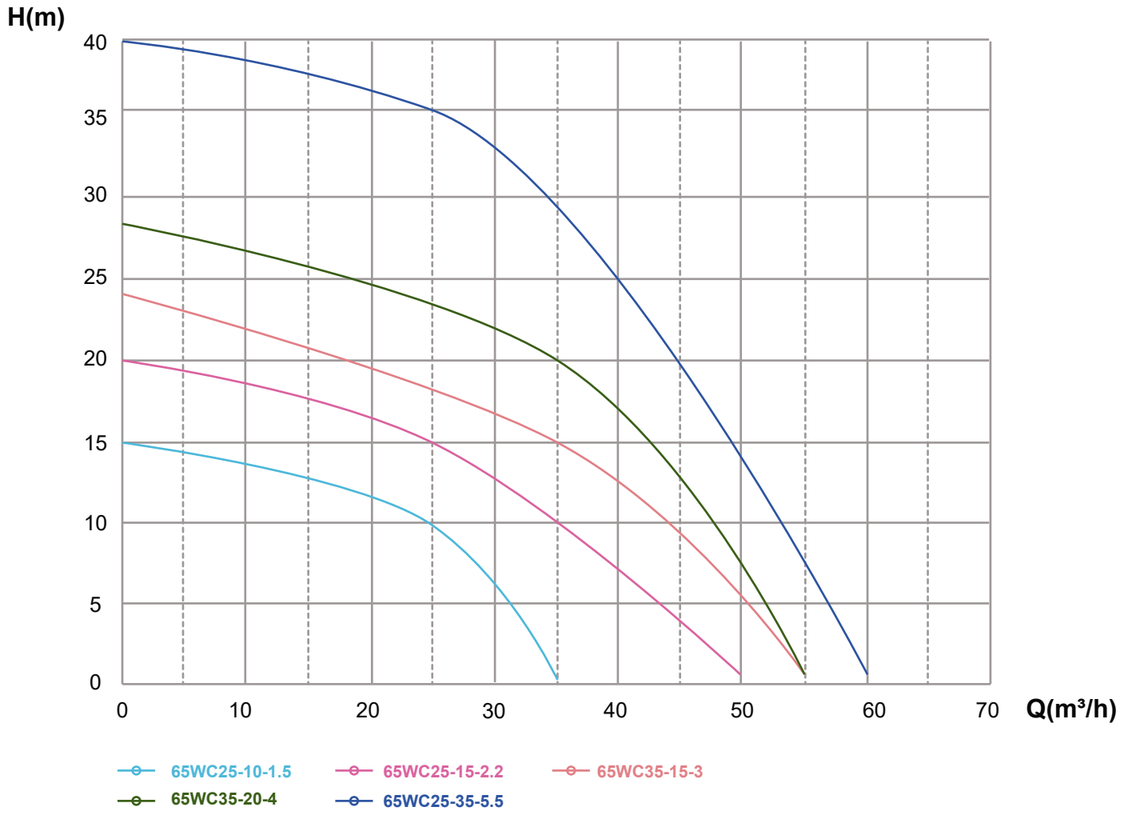

Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h) / Q (l/min)	0 / 0	5 / 83	10 / 167	15 / 250	20 / 333	25 / 417	30 / 500	35 / 583	40 / 667	45 / 750	50 / 833	55 / 917	60 / 1000
65WC25-10-1.5	1Ph/220V	1.5	2		15	14	13	12	11	10	7	1					
65WC25-10-1.5	3Ph/380V	1.5	2		15	14	13	12	11	10	7	1					
65WC25-15-2.2	1Ph/220V	2.2	3		20	19	18	17	16	15	13	10	7	4	1		
65WC25-15-2.2	3Ph/380V	2.2	3	**H(m)**	20	19	18	17	16	15	13	10	7	4	1		
65WC35-15-3	3Ph/380V	3	4		24	23	22	21	19	18	17	15	13	9	5	1	
65WC35-20-4	3Ph/380V	4	5.5		29	28	27	26	25	24	22	20	17	13	7	1	
65WC25-35-5.5	3Ph/380V	5.5	7.5		40	39	38	37	36	35	33	30	25	20	14	7	1

WC

PRODUCT NOMENCLATURE

80	WC	49	9	2.2
Outlet Size (mm)	Model	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)

RANGE CHARACTERISTICS

Power	**2.2-7.5kW**
Poles	**2**
Discharge	**DN50**
Max flow rate	**120 m^3/h**
Max head	**35 m**



APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220 - 240V/50Hz
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

AQUARIS
MADE IN ITALY

WC

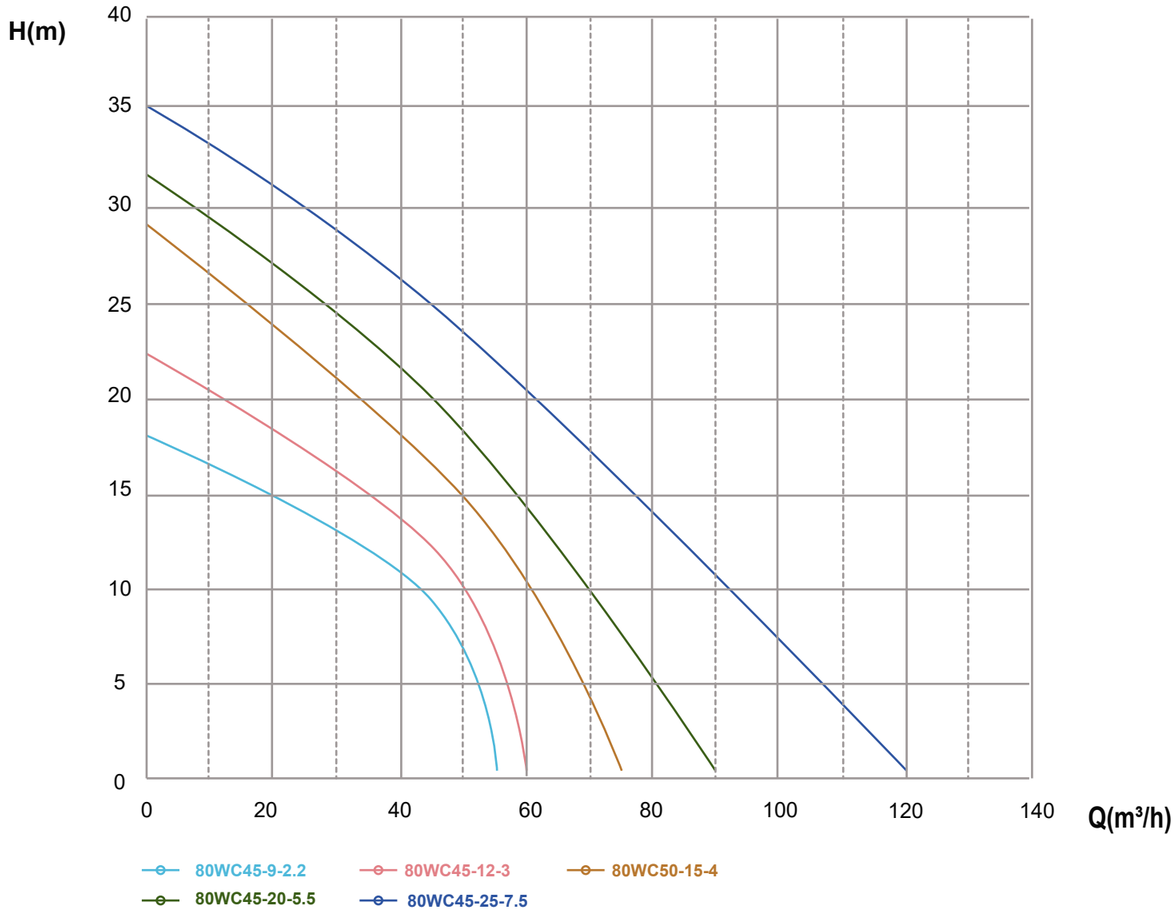


Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h) / Q (l/min)	0 / 0	10 / 167	20 / 333	30 / 500	40 / 667	50 / 833	60 / 1000	70 / 1167	80 / 1333	90 / 1500	100 / 1667	110 / 1833	120 / 2000
80WC45-9-2.2	1Ph/220V	2.2	3	H(m)	18	16	15	13	11	7	1						
80WC45-9-2.2	3Ph/380V	2.2	3		18	16	15	13	11	7	1						
80WC45-12-3	3Ph/380V	3	4		23	21	18	16	14	10	1						
80WC50-15-4	3Ph/380V	4	5.5		29	26	24	21	18	15	10	1					
80WC45-20-5.5	3Ph/380V	5.5	7.5		32	29	27	25	22	18	15	10	5	1			
80WC45-25-7.5	3Ph/380V	7.5	10		35	33	31	29	26	24	20	17	14	11	7	4	1

WC

PRODUCT NOMENCLATURE

100	WC	65	12	4
Outlet Size (mm)	Model	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)

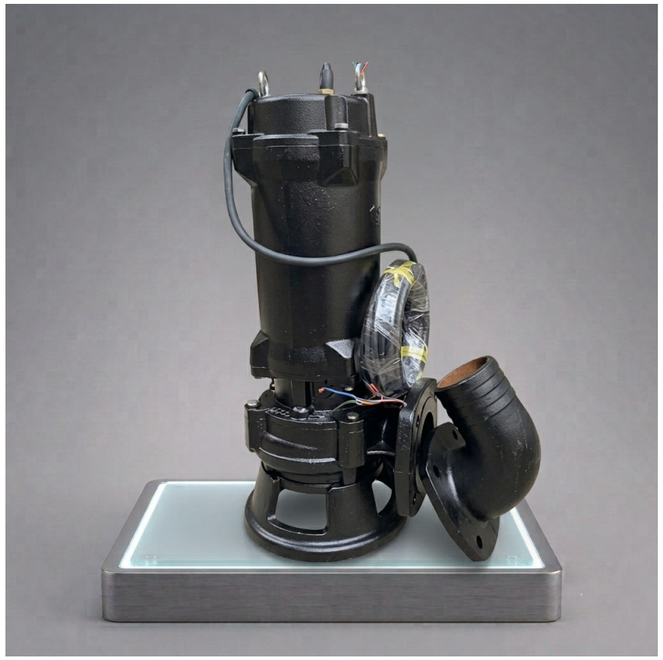

RANGE CHARACTERISTICS

Power	**4-22kW**
Poles	**2**
Discharge	**DN100**
Max flow rate	**250 m^3/h**
Max head	**65 m**

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

AQUARIS
MADE IN ITALY

WC

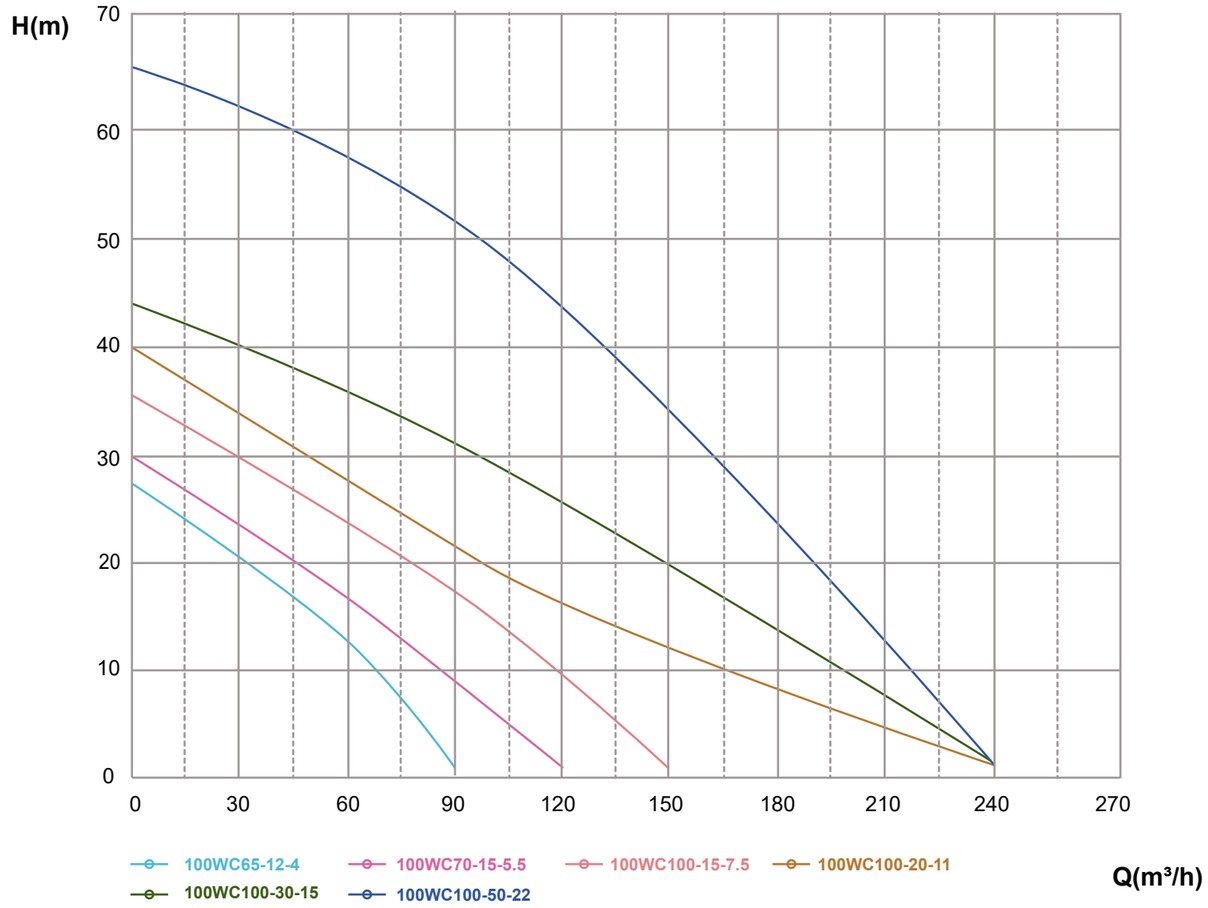


Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h) / Q (l/min)	0 / 0	30 / 500	60 / 1000	90 / 1500	120 / 2000	150 / 2500	180 / 3000	210 / 3500	240 / 4000
100WC65-12-4	3Ph/380V	4.0	5.5	H(m)	28	20	13	1					
100WC70-15-5.5	3Ph/380V	5.5	7.5		30	24	17	10	1				
100WC100-15-7.5	3Ph/380V	7.5	10		33	30	24	18	10	1			
100WC100-20-11	3Ph/380V	11	15		40	35	28	22	16	12	9	5	1
100WC100-30-15	3Ph/380V	15	20		44	40	38	31	25	20	13	8	1
100WC100-50-22	3Ph/380V	22	30		65	62	58	52	45	35	25	12	1

WC

PRODUCT NOMENCLATURE

150	WC	200	20	18.5
Outlet Size (mm)	Pump Type	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)

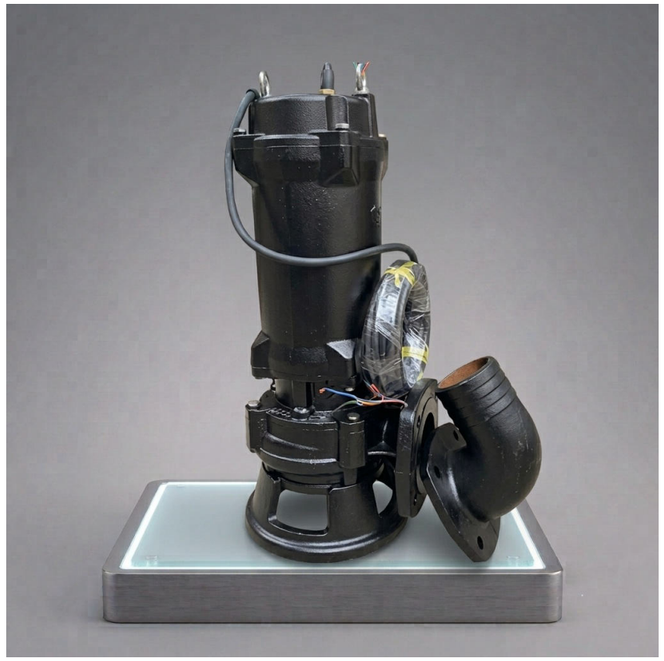

RANGE CHARACTERISTICS

Power	**5.5-22 kW**
Poles	**2**
Discharge	**DN150**
Max flow rate	**360 m^3/h**
Max head	**44 m**

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

WC

AQUARIS
MADE IN ITALY

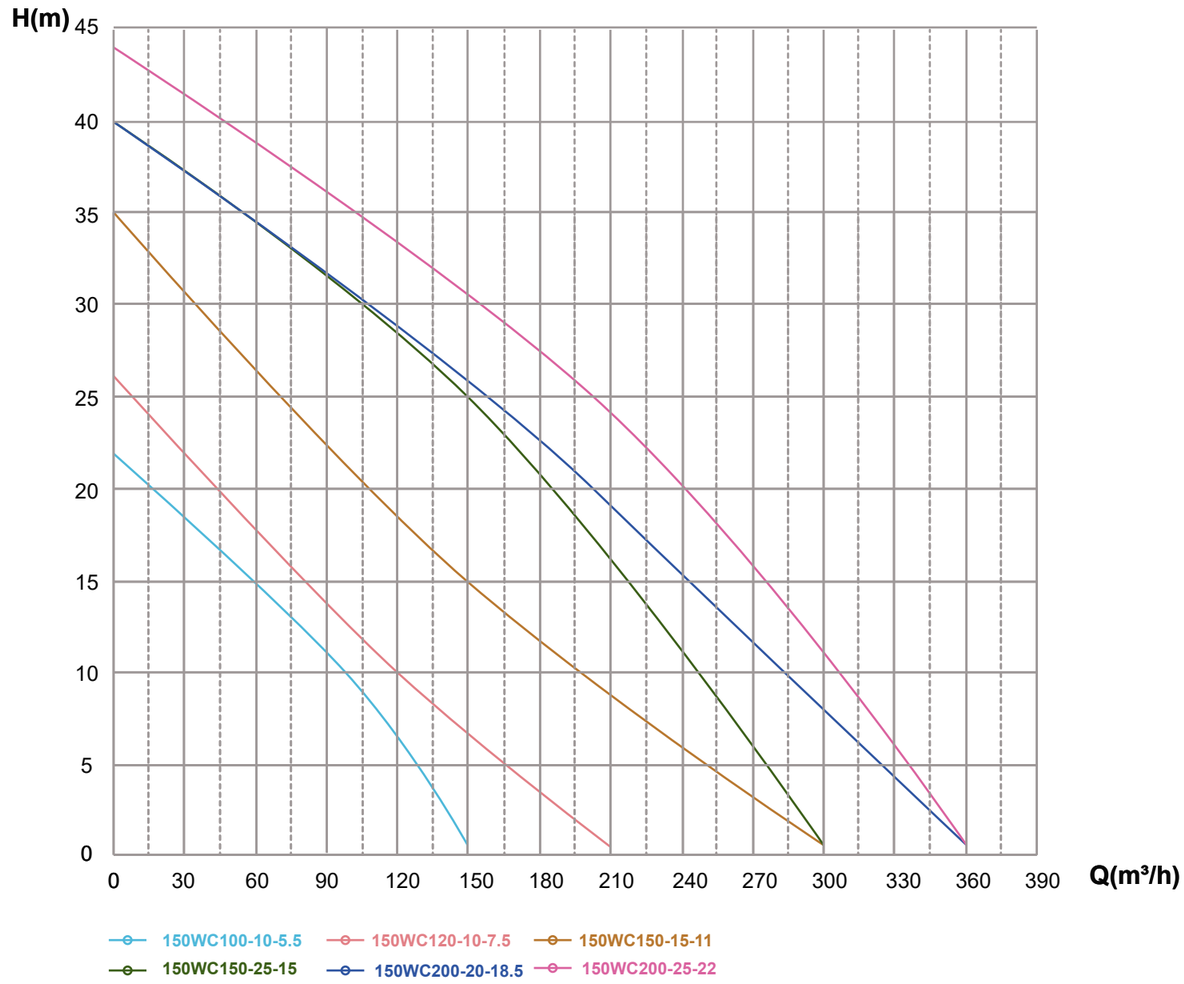

Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h) / Q (l/min)	0 / 0	30 / 167	60 / 333	90 / 500	120 / 667	150 / 833	180 / 1000	210 / 1167	240 / 1333	270 / 1500	300 / 1667	330 / 1833	360 / 2000
150WC100-10-5.5	3Ph/380V	5.5	7.5	H(m)	22	18	15	12	7	1							
150WC120-10-7.5	3Ph/380V	7.5	10		26	22	17	14	10	7	4	1					
150WC150-15-11	3Ph/380V	11	15		35	31	27	23	18	15	12	8	6	3	1		
150WC150-25-15	3Ph/380V	15	20		40	37	34	32	28	25	21	17	11	6	1		
150WC200-20-18.5	3Ph/380V	18.5	25		40	37	34	32	27	26	23	19	15	12	8	4	1
150WC200-25-22	3Ph/380V	22	30		44	42	39	36	33	30	27	24	20	16	11	6	1

WC

PRODUCT NOMENCLATURE

200	WC	200	20	22
Outlet Size (mm)	Pump Type	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)



RANGE CHARACTERISTICS

Power	**22-30kW**
Speed	**1450 r.p.m**
Discharge	**DN200**
Max flow rate	**600 m^3/h**
Max head	**30 m**

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

WC

AQUARIS
MADE IN ITALY

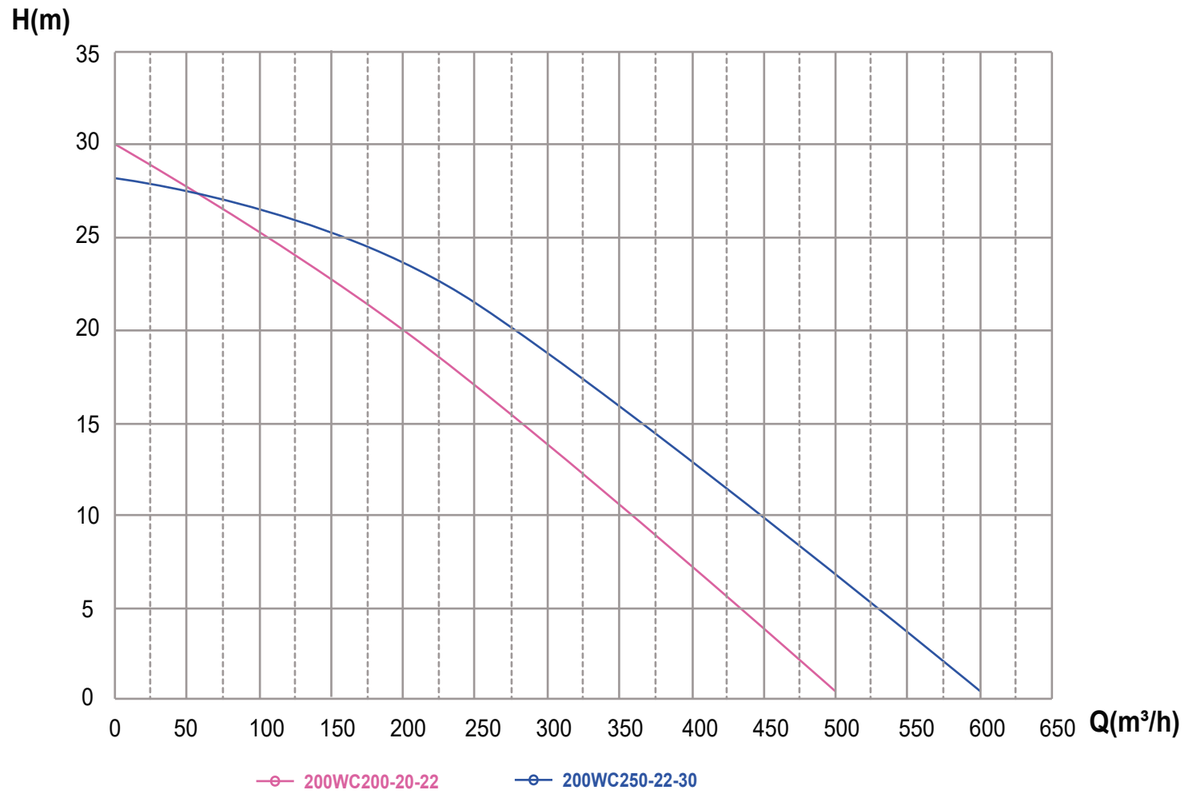

Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h)	0	50	100	150	200	250	300	350	400	450	500	550	600
				Q (l/min)	0	833	1667	2500	3333	4167	5000	5833	6667	7500	8333	9167	10000
200WC200-20-22	3Ph/380V	22	30	H(m)	30	27	25	23	20	17	14	11	7	4	1		
200WC250-22-30	3Ph/380V	30	40		28	27	26	25	24	22	18	16	13	10	7	4	1

WC

PRODUCT NOMENCLATURE

250	WC	600	9	30
Outlet Size (mm)	Pump Type	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)



RANGE CHARACTERISTICS

Power	**30-45kW**
Speed	**1450 r.p.m**
Discharge	**DN250**
Max flow rate	**1100 m^3/h**
Max head	**24 m**

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

WC

AQUARIS
MADE IN ITALY

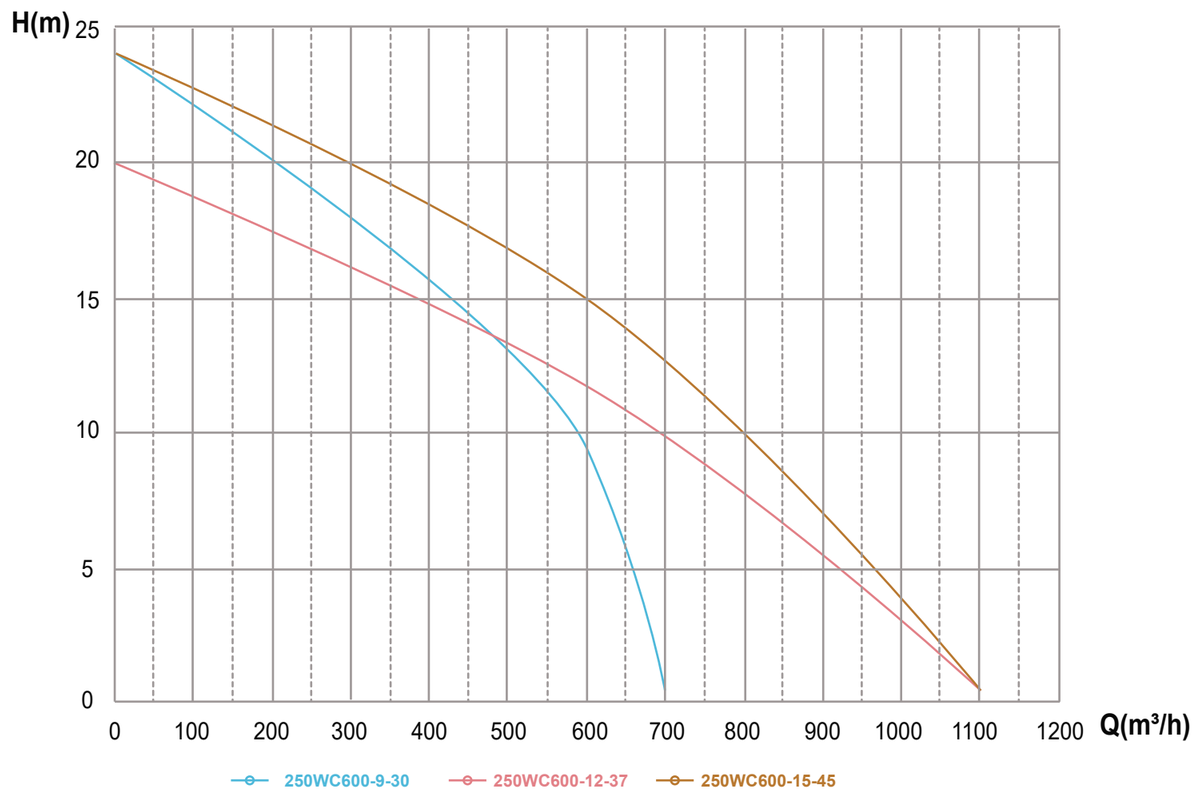

Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h) / Q (l/min)	0 / 0	100 / 1667	200 / 3333	300 / 5000	400 / 6667	500 / 8333	600 / 10000	700 / 11667	800 / 13333	900 / 15000	1000 / 16667	1100 / 18333
250WC600-9-30	3Ph/380V	30	40	H(m)	24	22	20	17	16	13	9	1				
250WC600-12-37	3Ph/380V	37	50		20	18	17	16	15	13	12	10	7	6	3	1
250WC600-15-45	3Ph/380V	45	60		24	23	22	20	18	16	15	13	10	7	4	1

WC

PRODUCT NOMENCLATURE

300	WC	800	12	45
Outlet Size (mm)	Pump Type	Rated Flow (m^3/h)	Rated Head (m)	Power (kW)

RANGE CHARACTERISTICS

Power	**45-110kW**
Speed	**1450 r.p.m**
Discharge	**DN350**
Max flow rate	**2600 m^3/h**
Max head	**34 m**



APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrugation

OPERATING CONDITIONS

Maximum fluid temperature up to +40°C

MOTOR AND PUMP

Rewindable motor
Three-phase: 380 - 415V/50Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906


Components	Material
Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

WARRANTY: 1 years

(according to our general sales conditions)

WC

AQUARIS
MADE IN ITALY

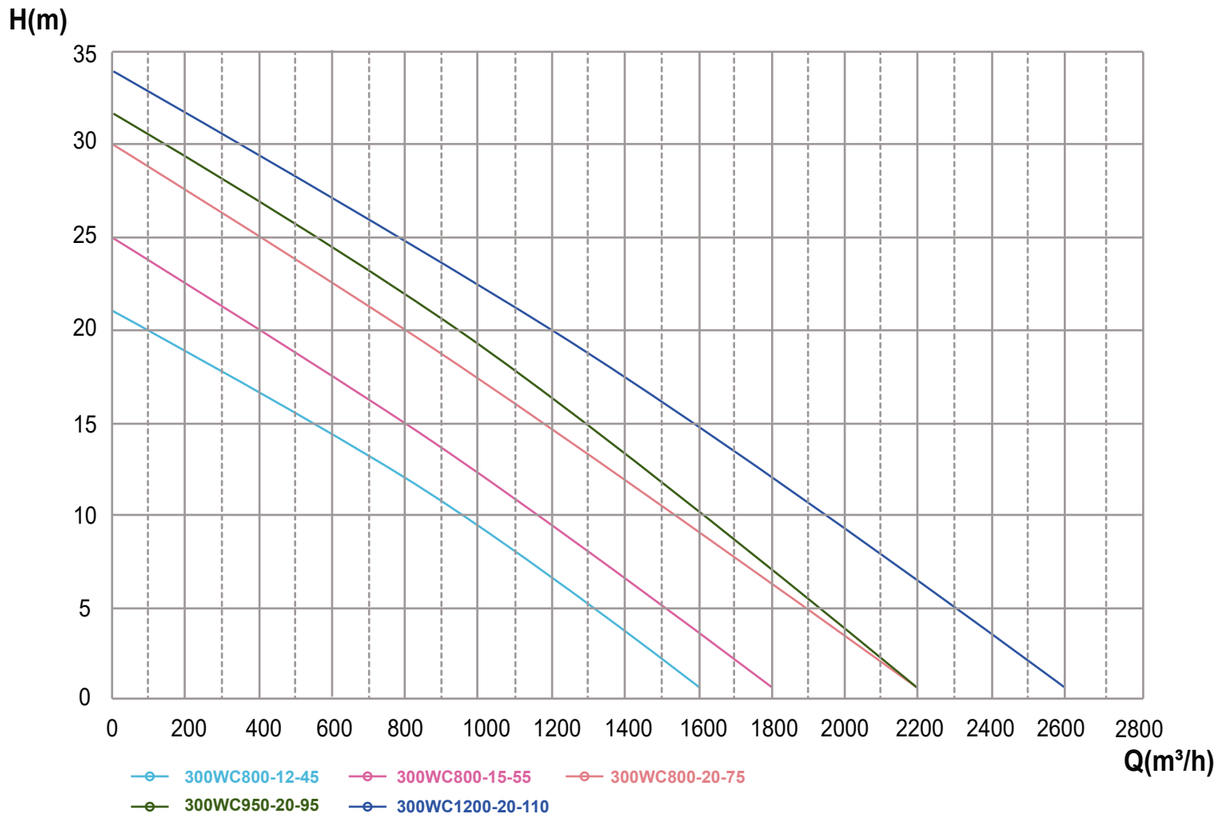

Type	Voltage (V)	Power (KW)	Power (HP)	Q (m^3/h)	0	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600
				Q (l/min)	0	3333	6667	10000	13333	16667	20000	23333	26667	30000	33333	36667	40000	43333
300WC800-12-45	3Ph/380V	45	60	H(m)	21	19	17	14	12	10	7	3	1					
300WC800-15-55	3Ph/380V	55	75		25	23	20	17	15	13	10	6	3	1				
300WC800-20-75	3Ph/380V	75	100		30	27	25	23	20	17	15	12	9	6	3	1		
300WC950-20-95	3Ph/380V	95	130		32	29	27	25	22	19	17	14	10	7	4	1		
300WC1200-20-110	3Ph/380V	110	150		34	32	29	27	25	23	20	18	15	13	9	7	3	1