2CDX 70 / 120 / 200

STAINLESS STEEL HORIZONTAL TWIN-IMPELLER CENTRIFUGAL PUMP

50 Hz · 2-pole motor

AQUARIS MADE IN ITALY



0.75–3.7 kW	1.2–12.6 m³/h	27–71.5 m	G1¼–G1½ / 1"
RATED POWER	CAPACITY Q	TOTAL HEAD H	PORTS DNA / DNM

OPERATING CONDITIONS

- Maximum working pressure: 8 bar
- Maximum liquid temperature: 110 °C

MATERIALS


- Pump body, impeller, diffuser and casing cover in AISI 304
- Shaft in AISI 304
- Bracket and motor casing in aluminium
- Mechanical seal in carbon/ceramic/NBR

APPLICATIONS

- Pressure boosting
- Water supply
- Water treatment and irrigation
- Air conditioning systems
- General water pumping, including moderately aggressive liquids

MOTOR

- T.E.F.C. 2-pole motor, 50 Hz
- Insulation class F, degree of protection IP55
- Single-phase 1~ 220–240 V; three-phase 3~ 380–415 V
- Permanent split capacitor and automatic thermal overload protection for single-phase version
- Thermal protection to be provided by the user for three-phase version
- DNA G1½ for 2CDX200, G1¼ for the other models; DNM 1"

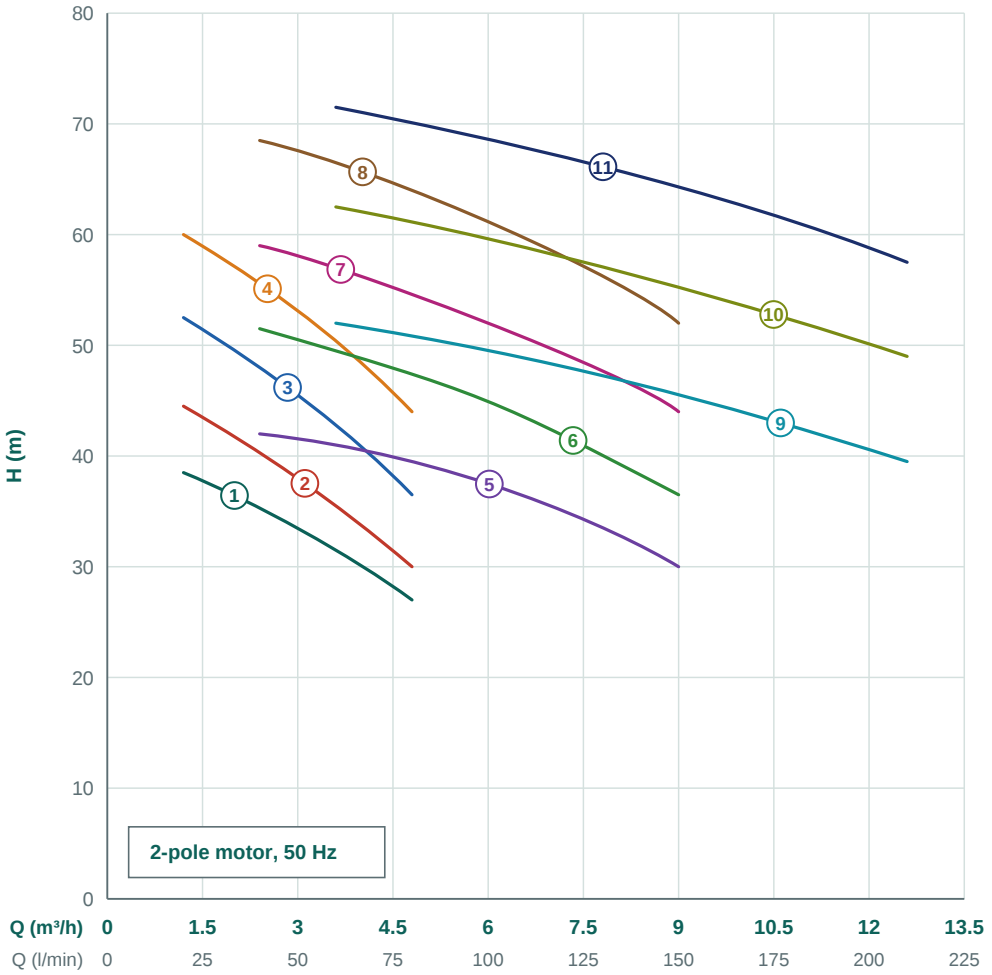

PERFORMANCE DATA

No.	MODEL		P_2	I (A)		CAPACITY Q / TOTAL HEAD H (m)							
	3~ 380–415 V	1~ 220–240 V	kW	1~	3~	m³/h	1.2	2.4	3.6	4.8	7.2	9	10.8	12.6
						l/min	20	40	60	80	120	150	180	210
1	**2CDX70/10**	2CDXM70/10	0.75	6.0	2.3		38.5	35.3	31.5	27	–	–	–	–
2	**2CDX70/12**	2CDXM70/12	0.9	7.0	2.9		44.5	40.3	35.5	30	–	–	–	–
3	**2CDX70/15**	2CDXM70/15	1.1	8.0	3.2		52.5	48	42.8	36.5	–	–	–	–
4	**2CDX70/20**	2CDXM70/20	1.5	9.9	4.0		60	55.6	50.4	44	–	–	–	–
5	**2CDX120/15**	2CDXM120/15	1.1	8.3	3.2		–	42	41	39.5	35	30	–	–
6	**2CDX120/20**	2CDXM120/20	1.5	10.2	4.0		–	51.5	49.5	47.4	41.8	36.5	–	–
7	**2CDX120/30**	2CDXM120/30	2.2	12.6	5.0		–	59	57	54.6	49.2	44	–	–
8	**2CDX120/40**	2CDXM120/40	3.0	15.6	6.2		–	68.5	66.5	64	58	52	–	–
9	**2CDX200/30**	2CDXM200/30	2.2	15.1	6.0		–	–	52	50.8	48.1	45.5	42.7	39.5
10	**2CDX200/40**	2CDXM200/40	3.0	16.6	6.6		–	–	62.5	61.1	58	55.2	52.3	49
11	**2CDX200/50**	–	3.7	–	8.7		–	–	71.5	70.1	67	64.3	61.2	57.5

2CDX 70 / 120 / 200

AQUARIS MADE IN ITALY

DIMENSIONS & WEIGHTS

50 Hz · 2-pole motor

DIMENSIONS & WEIGHTS

MODEL		DIMENSIONS (mm)																	GLAND		DNA	WEIGHT	
3~	1~	A	B	C	D	E	H	H1	H2	H3	H4	M	M1	N	N1	R	W	S	T 1~	V 3~		kg 1~	kg 3~
2CDX70/10	2CDXM70/10	208	355	182	12.5	8	229	106	123	209	215	50	38	120	160	142.5	93	9	PG11	PG11	G1¼	13.5	13.3
2CDX70/12	2CDXM70/12	208	355	182	12.5	8	229	106	123	209	215	50	38	120	160	142.5	93	9	PG11	PG11	G1¼	14.2	13.8
2CDX70/15	2CDXM70/15	232	380	199	12.5	8	250	118	132	235	249	55	40	140	180	140	95.5	9	PG13.5	PG11	G1¼	17.4	16.4
2CDX70/20	2CDXM70/20	232	385	199	12.5	8	250	118	132	235	249	55	40	140	180	140	95.5	9	PG13.5	PG11	G1¼	18.6	18.2
2CDX120/15	2CDXM120/15	208	380	199	12.5	8	229	106	123	223	237	55	40	140	180	140	95.5	9	PG13.5	PG11	G1¼	15.5	15.3
2CDX120/20	2CDXM120/20	208	380	199	12.5	8	229	106	123	223	237	55	40	140	180	140	95.5	9	PG13.5	PG11	G1¼	18.0	16.9
2CDX120/30	2CDXM120/30	232	390	209.5	12.5	8	250	118	132	240	–	65	40	140	180	145	110.5	9	–	PG13.5	G1¼	23.2	23.2
2CDX120/40	2CDXM120/40	232	420	231.5	12.5	8	250	118	132	240	–	65	40	140	180	145	110.5	9	–	PG13.5	G1¼	26.4	26.4
2CDX200/30	2CDXM200/30	208	394	210	12.5	8	229	106	123	240	–	65	40	140	180	145	110.5	9	–	PG13.5	G1½	25.0	25.0
2CDX200/40	2CDXM200/40	232	420	231.5	12.5	8	250	118	132	240	–	65	40	140	180	145	110.5	9	–	PG13.5	G1½	25.0	25.0
2CDX200/50	–	232	445	231.5	16	13	250	118	132	252	–	68	50	160	210	145	110	12	–	PG16	G1½	–	32.7

Dimensions in mm. T, V = cable gland (single-phase / three-phase version). Fixing holes: 2–øS.

OVERALL DIMENSIONS

