AQUARIS
MADE IN ITALY

SUBMERSIBLE PUMP

QXN40-60

TECHNICAL DATA

50 Hz · n ≈ 2850 /min



Hydraulic part under the motor; the motor is cooled by the pumped water for safe operation, even with the pump only partially immersed. Double shaft seal with interposed oil chamber.

APPLICATION

- For mining, building, factory and industrial applications.
- For water supply from wells, tanks or reservoirs.
- For garden use and agricultural irrigation.


40 m³/h
RATED FLOW · 667 l/min

80 m
RATED HEAD

11 kW
MOTOR · 15 HP

IP68
PROTECTION CLASS

CHARACTERISTIC CURVE · 50 HZ

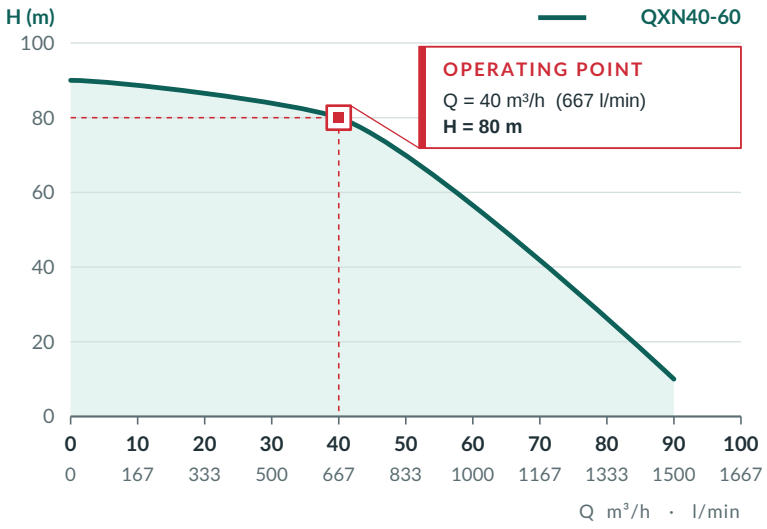

Q (m³/h)	0	10	20	30	40	50	60	70	80	90
Q (l/min)	0	167	333	500	667	833	1000	1167	1333	1500
H (m)	90	89	87	84	80	70	57	42	26	10

SPECIFICATION

Motor power	**11 kW (15 HP)**
Rated current (380 V)	**31 A**
Power supply	**3~ 380–415 V, 50 Hz**
Outlet	**80 mm**
Rated flow	**40 m³/h (667 l/min)**
Rated head	**80 m**
Max. flow	**90 m³/h**
Max. head	**90 m**

Impeller passage	**8 mm**
Water temperature	**up to 40 °C**
pH	**6.5 – 8.5**
Insulation class	**B**
Protection class	**IP68**
Max. immersion depth	**20 m**
Cable length	**15 m**
On request	**other voltages; cable length**

SUBMERSIBLE PUMP
QXN40-60

CONSTRUCTION
AND MATERIALS

MATERIALS

No.	Part name	Material
01	Hose coupling	Cast iron
03	Terminal box	Cast iron
05	Upper cover	Cast iron
06	Upper bearing house	Cast iron
07	Bearing house	Cast iron
10	Seal bracket	Cast iron
11	Motor body	Cast iron
12	Outer casing	AISI 304 SS
13	Pump casing	Cast iron
14	Impeller	Cast iron
15	Diffuser	Cast iron

No.	Part name	Material
22	Seat assembly	Cast iron
25	Strainer	Steel
27	Stator	–
28	Rotor	Shaft: stainless steel
31a	Bearing	Ball bearing
31b	Bearing	Ball bearing
34a	Mechanical seal	SiC-SiC
34b	Mechanical seal	SiC-SiC
38	Shaft sleeve	NBR & steel
47	Cable	–

OUTLET CONNECTION

Outlet D	**80 mm**
Style	**A**
Hose I.D.	**80 mm**
Steel pipe thread	**G2½"**
Transition joint	**G2½" → G3"**
Nominal pipe diameter	**80 mm**

MAIN MATERIALS

Outer casing	**AISI 304 SS**
Motor body, covers	**Cast iron**
Impeller, diffuser	**Cast iron**
Rotor shaft	**Stainless steel**
Mechanical seals	**SiC-SiC**
Strainer	**Steel**

SECTIONAL DRAWING

