perotac
MADE IN TAIWAN

8SP

Applications
For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions
Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8"


Motor and Pump
Rewindable motor
Three-phase: 380 - 415V/50Hz
①Direct start (1 cable)
②Star-delta start (2 cables)
Equip with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906


Options on request
Special mechanical seal
Other voltages or frequency 60Hz

Warranty: 2 years
(according to our general sales conditions)



Components	Material
Delivery casing	①AISI 304 SS ②AISI 316 SS
Suction lantern	①AISI 304 SS ②AISI 316 SS
Diffuser	①AISI 304 SS ②AISI 316 SS
Impeller	①AISI 304 SS ②AISI 316 SS
Shaft	①AISI 431 SS ②AISI 316 SS
Shaft coupling	①AISI 304 SS ②AISI 316 SS
Wear ring	Rubber
Motor external casing	AISI 304 SS
Top chock	Cast-iron ASTM N0.30
Bottom support	Cast-iron ASTM N0.30
Seal	NBR Graphite-SIC/TC
Shaft	AISI 304 SS-ASTM 5140



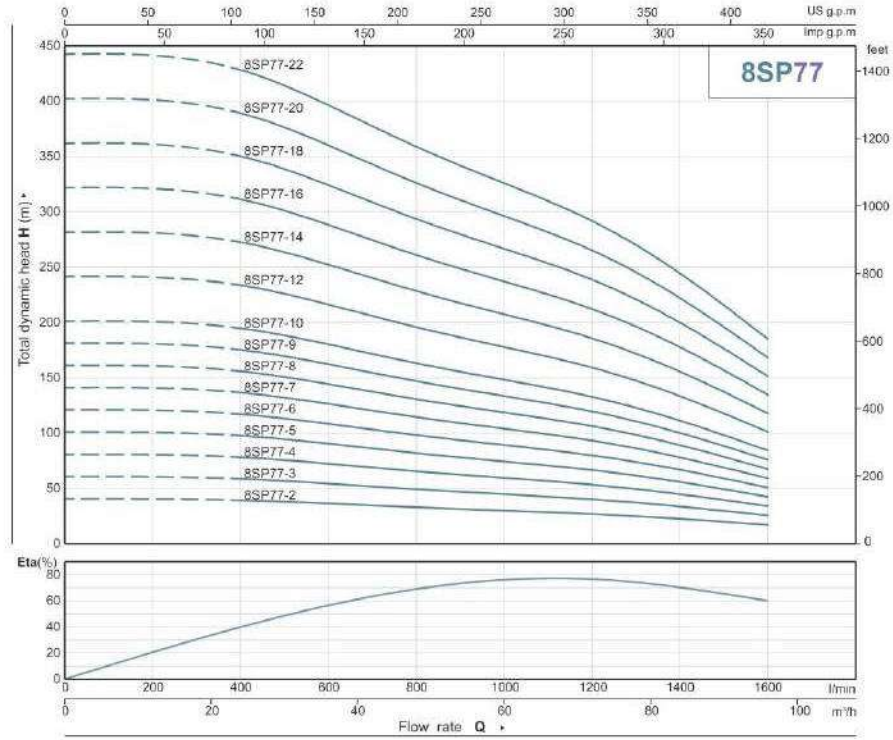

PERFORMANCE DATA 50Hz

MODEL	P_2		DELIVERY									n≈2850 1/min
3~ 380 - 415V	kW	HP	Q m³/h	0	12	24	36	48	60	72	84	96
			l/min	0	200	400	600	800	1000	1200	1400	1600
8SP77-2	7.5	10		40	40	39	36	33	30	26	22	17
8SP77-3	11	15		60	60	58	54	49	44	40	33	25
8SP77-4	15	20		80	80	78	72	65	59	53	44	34
8SP77-5	18.5	25		101	100	97	90	81	74	66	55	42
8SP77-6	22	30		121	120	117	108	98	89	79	67	50
8SP77-7	26	35		141	140	136	126	114	104	93	78	59
8SP77-8	30	40		161	160	156	144	130	118	106	89	67
8SP77-9	37	50	H(m)	181	180	1750	162	147	133	119	100	76
8SP77-10	37	50		201	201	195	180	163	148	133	111	84
8SP77-12	45	60		241	241	233	216	196	178	159	133	101
8SP77-14	55	75		281	281	272	252	228	207	186	155	118
8SP77-16	63	85		322	321	311	288	261	237	212	178	134
8SP77-18	63	85		362	361	350	324	293	266	239	200	151
8SP77-20	75	100		402	401	389	360	326	296	265	222	168
8SP77-22	75	100		442	441	428	396	359	326	291	244	185