

6SP30

3~ 380–415 V 50 Hz | n ≈ 2850 /min | IP68 | Motor IE3

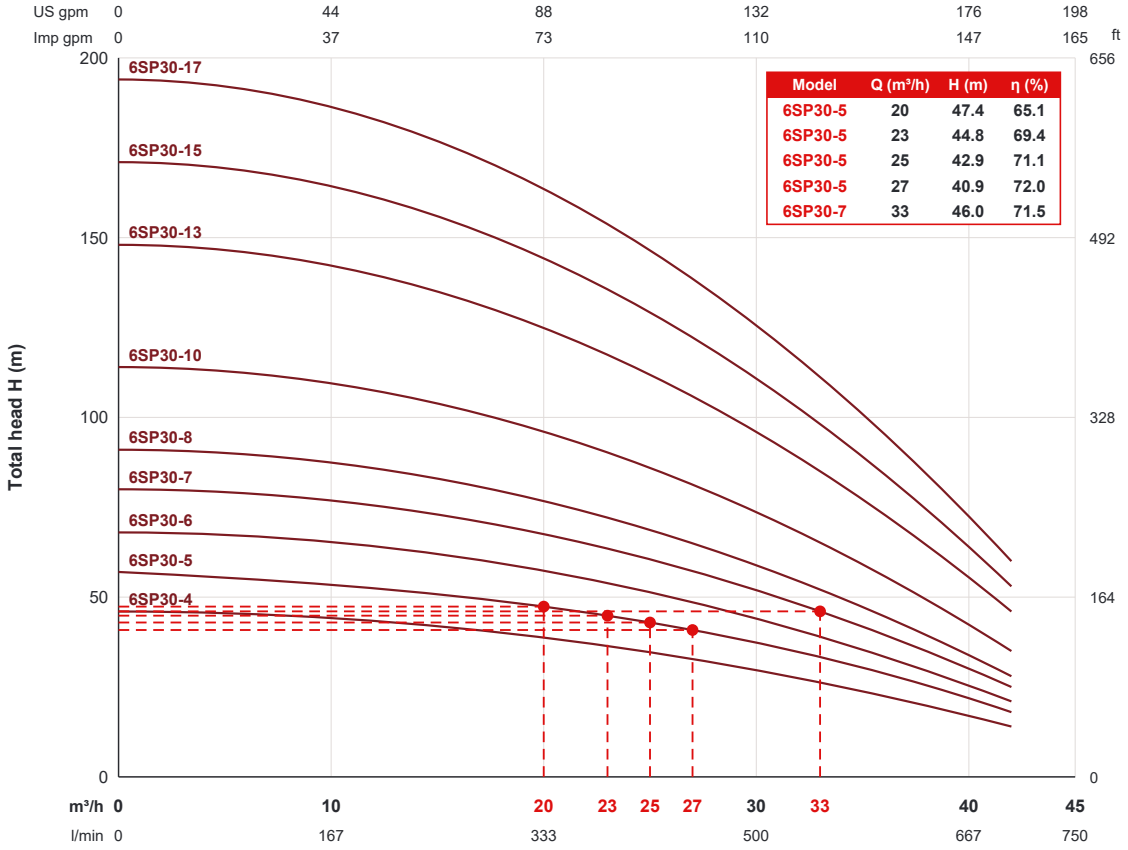

Model	Q (m³/h)	H (m)	η (%)
6SP30-5	20	47.4	65.1
6SP30-5	23	44.8	69.4
6SP30-5	25	42.9	71.1
6SP30-5	27	40.9	72.0
6SP30-7	33	46.0	71.5

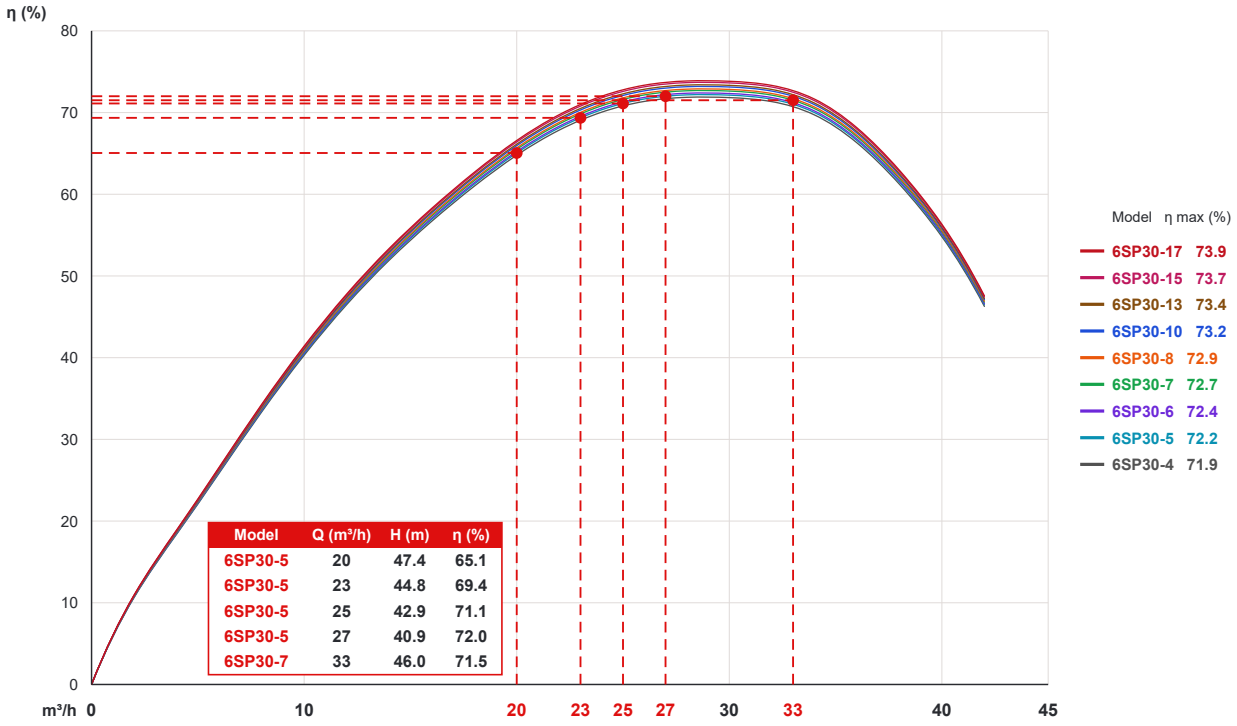

Model	Q (m³/h)	H (m)	η (%)
6SP30-5	20	47.4	65.1
6SP30-5	23	44.8	69.4
6SP30-5	25	42.9	71.1
6SP30-5	27	40.9	72.0
6SP30-7	33	46.0	71.5

PERFORMANCE DATA

MODEL	P_2											
3~ 380–415 V	kW	HP	Q	m³/h	0	6	12	18	24	30	36	42
				l/min	0	100	200	300	400	500	600	700
6SP30-4	4	5.5	H (m)		46	44	42	39	36	31	23	14
6SP30-5	5.5	7.5			57	56	53	48	44	38	29	18
6SP30-6	5.5	7.5			68	67	63	58	53	46	34	21
6SP30-7	7.5	10			80	78	74	68	62	54	40	25
6SP30-8	7.5	10			91	89	84	77	71	61	46	28
6SP30-10	9.2	12.5			114	111	105	96	89	76	57	35
6SP30-13	11	15			148	145	137	125	115	99	75	46
6SP30-15	13	17.5			171	167	158	145	133	115	86	53
6SP30-17	15	20			194	189	179	164	151	130	97	60


Curves at 50 Hz, 2 poles, n ≈ 2850 /min, clean water at 20 °C, 1 mm²/s. Typical values, not guaranteed.

Redpump
Italy Standard

6SP30 | Outlet 3 in

MODEL	P (mm)	M (mm)	T (mm)
6SP30-4	656	524	1180
6SP30-5	752	574	1326
6SP30-6	848	574	1422
6SP30-7	944	639	1583
6SP30-8	1040	639	1679
6SP30-10	1232	699	1931
6SP30-13	1520	764	2284
6SP30-15	1712	824	2536
6SP30-17	1904	884	2788

Dimensions: mm | 3~ 380–415 V 50 Hz

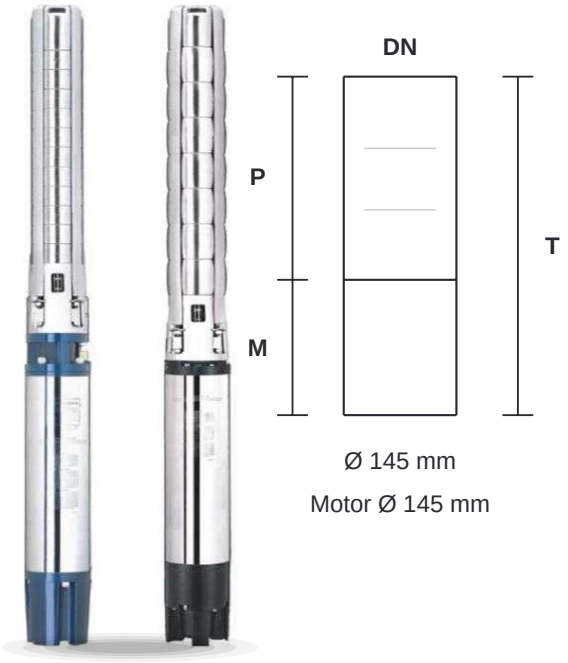

6SP30

APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature: 50 °C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

COMPONENTS AND MATERIALS

COMPONENT	MATERIAL
Delivery casing	AISI 304 SS
Check valve	AISI 304 / AISI 316 SS
Suction lantern	AISI 304 SS
Diffuser	AISI 304 SS
Impeller	AISI 304 SS
Pump shaft	AISI 316 SS
Shaft coupling	AISI 316 SS
Wear ring	Rubber
Motor external casing	AISI 304 SS
Top cover	Cast iron G20 UNI5007 / AISI 304 SS
Seal	NBR Graphite-SIC/TC
Motor shaft	AISI 304 SS-ASTM 5140
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

MOTOR DATA

ITEM	VALUE
Power supply	3~ 380–415 V 50 Hz
Speed	n ≈ 2850 /min
Protection grade	IP68
Efficiency class	IE3
Motor diameter	Ø 145 mm

MOTOR AND PUMP

Rewindable motor
1. Direct start (1 cable)
2. Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards

OPTIONS ON REQUEST

Special mechanical seal