IRG SERIES

300IRG

Vertical single-suction centrifugal pump



MAIN DATA

Model	**300IRG800-30-110**
Power P2	**110 kW / 150 HP**
Power supply	**3~ 380–415 V 50 Hz**
Speed	**n ≈ 1450 /min (4 poles)**
DN	**300×300 mm**
Rated point	**800 m³/h – 30 m**
Flow range	**600 – 880 m³/h**
Head range	**35 – 21 m**

PRODUCT NOMENCLATURE


300	IRG	800	30	110
Outlet (mm)	Series	Rated flow (m³/h)	Rated head (m)	Power (kW)

VERTICAL CENTRIFUGAL PUMP

300IRG800-30-110 | 110 kW | 3~ 380–415 V | 50 Hz | n ≈ 1450 /min

Redpump
Italy Standard

PERFORMANCE CURVE

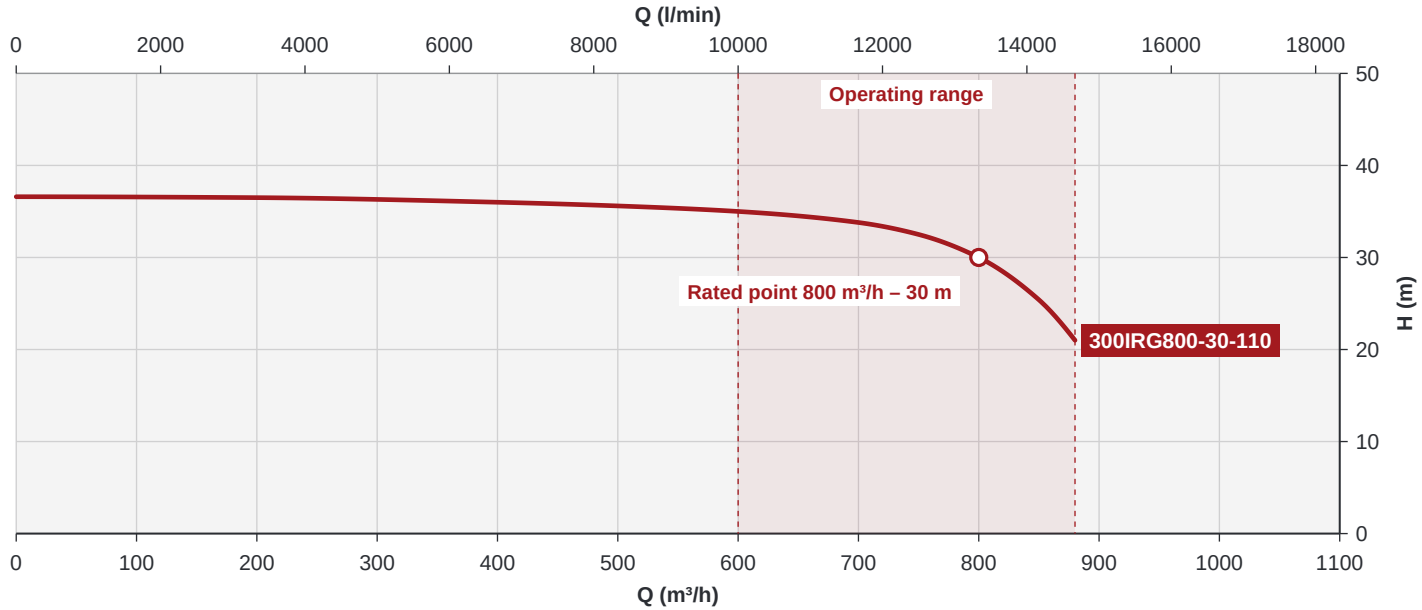

Curves at 50 Hz, 4 poles (≈ 1450 min^{-1}), clean water at 20 °C, kinematic viscosity 1 mm²/s. Typical values, not guaranteed.

PERFORMANCE TABLE

Model 3~	P2	P2	Q (m³/h)	0	200	400	500	600	700	750	800	850	880
	kW	HP	Q (l/min)	0	3333	6667	8333	10000	11667	12500	13333	14167	14667
300IRG800-30-110	110	150	**H (m)**	36.6	36.5	36	35.6	35	33.8	32.5	30	25.4	21

FEATURES

Vertical design
Suitable for any installation.

Anti-corrosion coating
On the pump casing.

Quality bearings
Wear-resistant mechanical seal.

Explosion-proof motor
Available on request.

APPLICATIONS

- Clean water
- Civil
- Industry

MOTOR

- Three-phase: 380–415 V / 50 Hz
- 4 poles, n ≈ 1450 /min
- Protection IP55, class F

MATERIALS

Pump casing	Cast iron
Impeller	SS304 / Cast iron
Shaft	SS304 – 45# Steel
Mechanical seal	SiC / Carbon / SS304
Connection	Cast iron
Bearing	Ball bearing
Water deflector	Rubber