AQUARIS
SUBMERSIBLE PUMP



CONTENTS



3SP1
3SP2

STAINLESS STEEL
SUBMERSIBLE PUMPS

01-02



4SP2 **4SP3**
4SP5 **4SP8**
4SP14

STAINLESS STEEL
SUBMERSIBLE PUMPS

03-07



5SP10 **5SP15**
5SP20 **5SP25**
5SP30

STAINLESS STEEL
SUBMERSIBLE PUMPS

08-12



6SP20 **6SP30**
6SP46 **6SP60**

STAINLESS STEEL
SUBMERSIBLE PUMPS

13-20



8SP77
8SP95
8SP120

STAINLESS STEEL
SUBMERSIBLE PUMPS

21-26



10SP125
10SP160

STAINLESS STEEL
SUBMERSIBLE PUMPS

27-30

AQUARIS
MADE IN ITALY

3" 3SP1 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ70mm
Highest temperature of liquid: 35°C

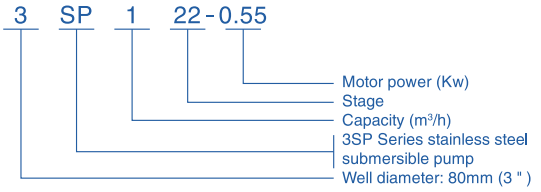




Diffuser height: 20mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^{1}/_{4}$

TYPE	Motor power		Capacity and head								
			l/min	0	8	17	25	30	33	42	Length
	KW	Hp	m³/h	0	0.5	1	1.5	1.8	2	2.5	mm
3SP1-10	0.25	0.33	Head (m)	38	36	33	28	23	20	10	330
3SP1-15	0.37	0.5		55	54	50	40	34	29	14	430
3SP1-22	0.55	0.75		79	78	72	58	50	42	20	570
3SP1-30	0.75	1		108	105	93	76	64	57	27	730
3SP1-40	1.1	1.5		144	132	120	91	76	60	35	930

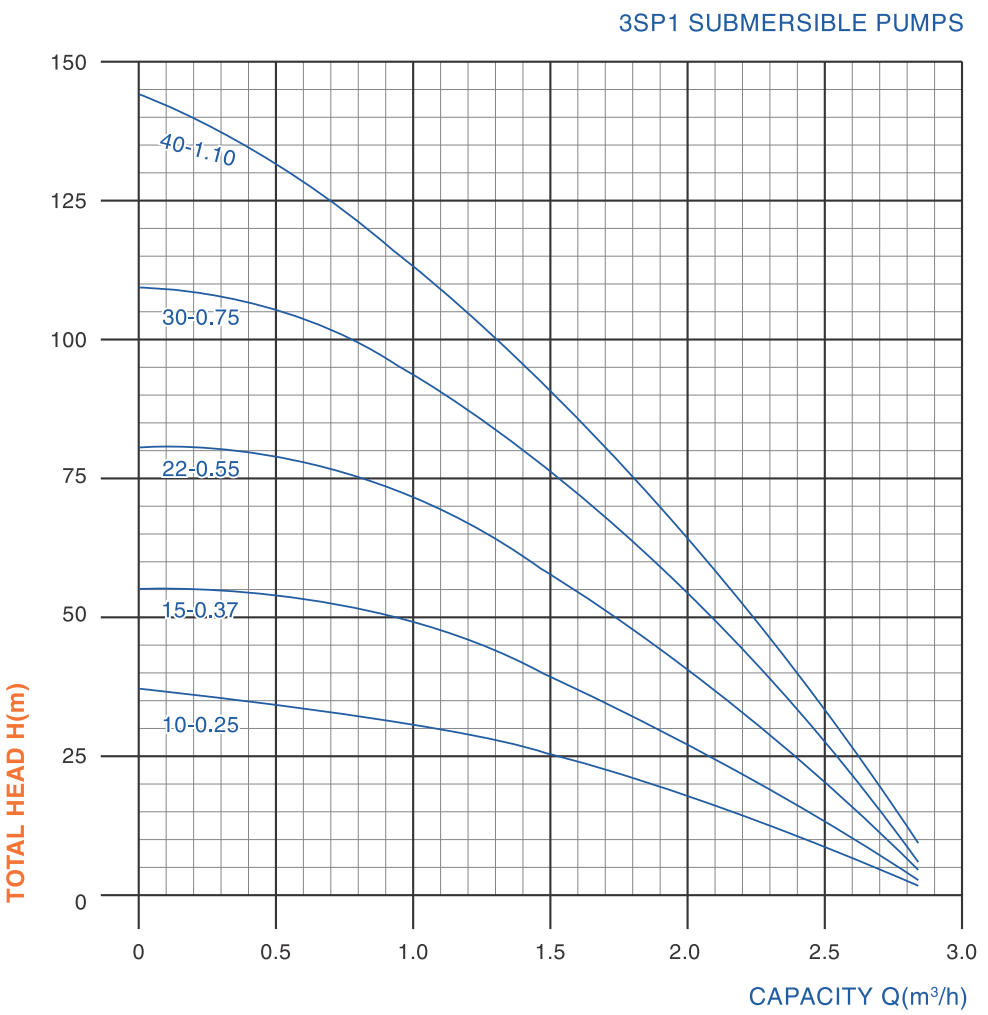

AQUARIS MADE IN ITALY

3" 3SP2 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ70mm
Highest temperature of liquid: 35°C

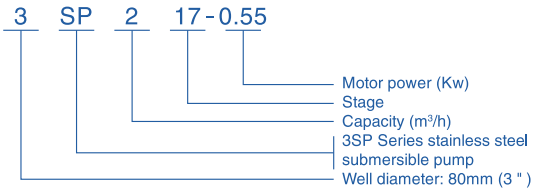


Diffuser height: 20mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^{1}/_{4}$

TYPE	Motor power		Capacity and head							
			l/min	0	17	25	33	42	50	Length
	KW	Hp	m³/h	0	1	1.5	2	2.5	3	mm
3SP2-8	0.25	0.33	Head (m)	28	26	25	22	17	11	290
3SP2-11	0.37	0.5		39	36	34	30	24	15	350
3SP2-17	0.55	0.75		60	56	52	46	37	23	470
3SP2-24	0.75	1		85	79	74	65	52	33	610
3SP2-32	1.1	1.5		106	97	92	83	65	40	770

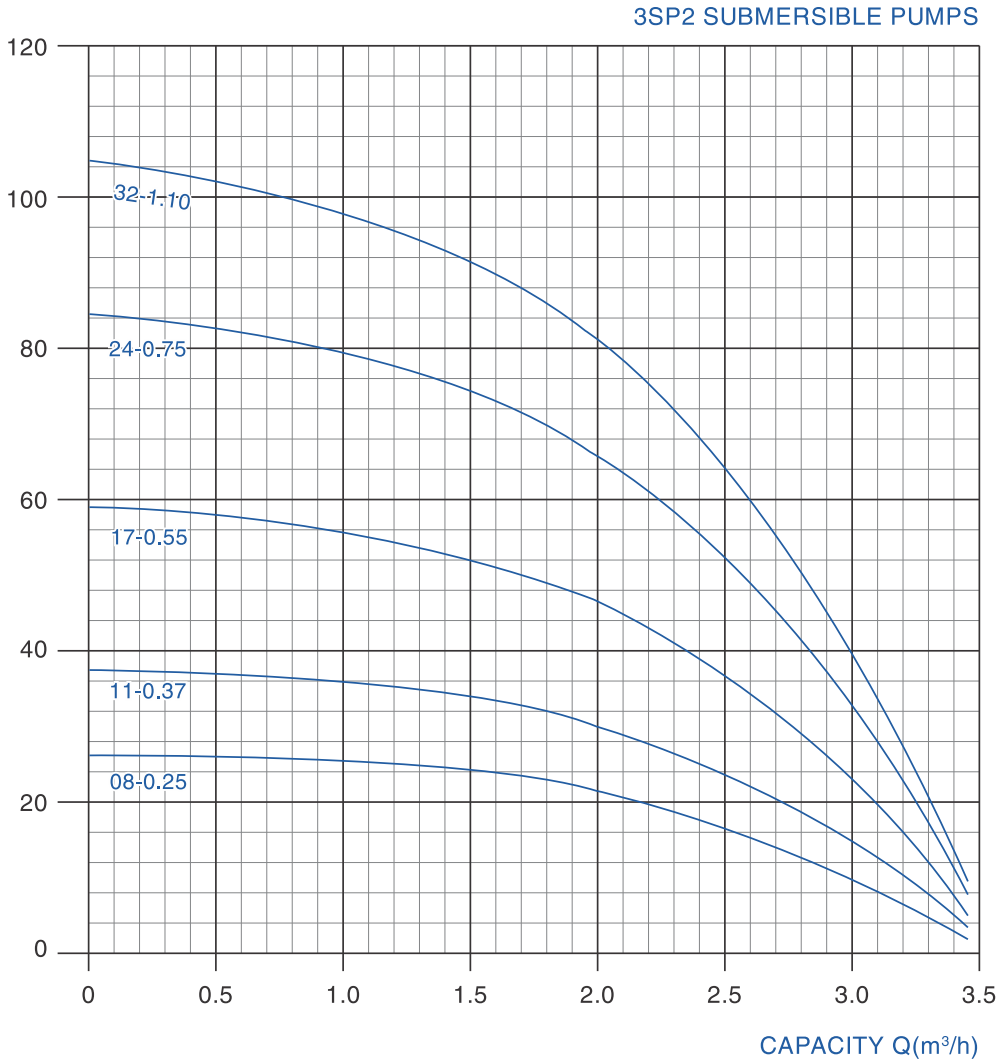



AQUARIS MADE IN ITALY

4" 4SP2 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ95mm
Highest temperature of liquid: 35°C

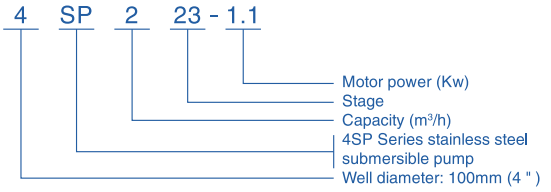




Diffuser height: 21mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G1 1/4 "

TYPE	Motor power		Capacity and head						
			l/min	0	25	33	42	Length	Weight
	KW	Hp	m³/h	0	1.5	2	2.5	mm	kg
4SP2-6	0.37	0.5	Head (m)	37	30	24	20	281	2.3
4SP2-9	0.37	0.5		55	45	36	30	344	2.9
4SP2-13	0.55	0.75		80	64	52	44	428	3.7
4SP2-18	0.75	1		110	89	73	66	533	4.7
4SP2-23	1.1	1.5		141	114	92	77	638	5.7
4SP2-28	1.5	2		171	139	112	94	743	6.7
4SP2-33	1.5	2		202	163	132	111	848	7.7
4SP2-40	2.2	3		245	198	160	135	995	9.1
4SP2-48	2.2	3		294	237	192	161	1163	10.7
4SP2-55	3	4		336	272	220	185	1310	12.0

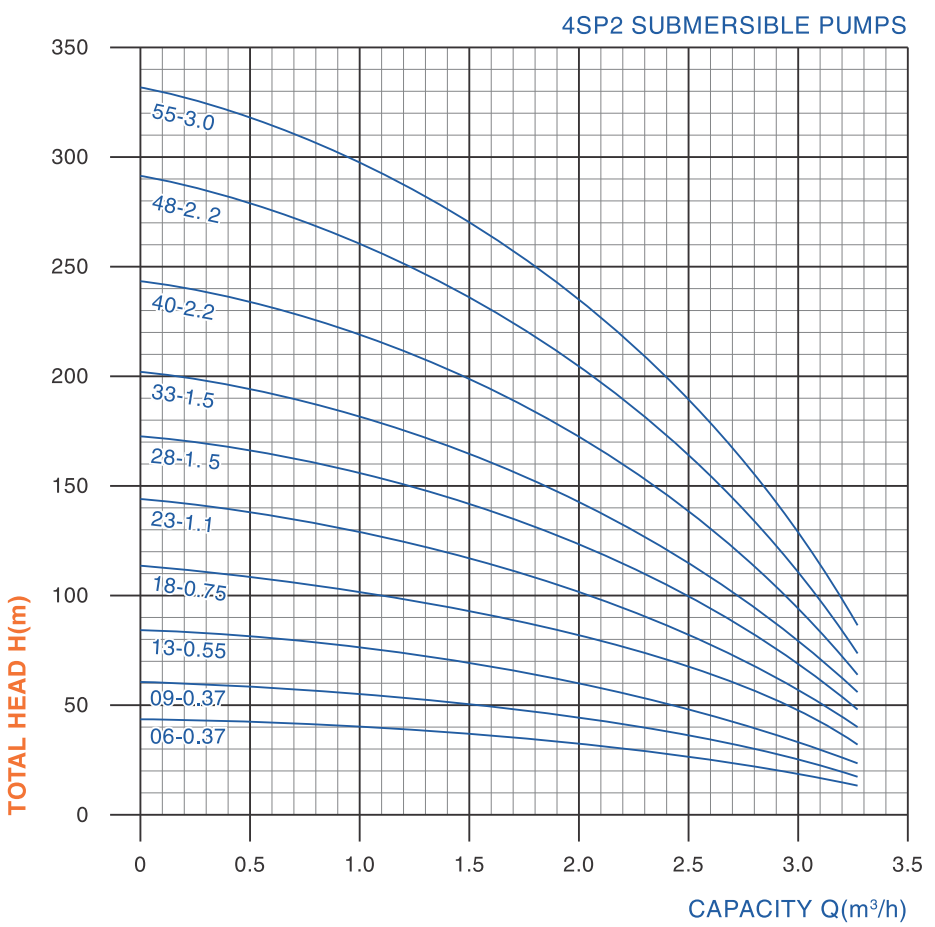

AQUARIS MADE IN ITALY

4" 4SP3 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ95mm
Highest temperature of liquid: 35°C

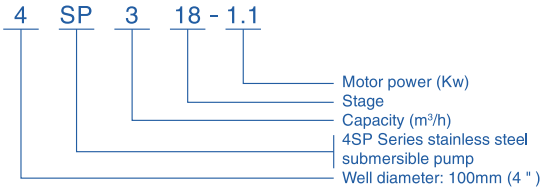


Diffuser height: 21mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G1 1/4 "

TYPE	Motor power		Capacity and head						
			l/min	0	33	50	67	Length	Weight
	KW	Hp	m³/h	0	2	3	4	mm	kg
4SP3-06	0.37	0.5	Head (m)	38	30	26	19	281	2.3
4SP3-09	0.55	0.75		57	45	38	28	344	2.9
4SP3-12	0.75	1		76	60	51	37	407	3.5
4SP3-15	1.1	1.5		95	74	64	46	470	4.1
4SP3-18	1.1	1.5		113	89	77	56	533	4.7
4SP3-22	1.5	2		139	109	94	68	617	5.5
4SP3-25	1.5	2		158	124	107	78	680	6.1
4SP3-32	2.2	3		202	158	137	99	827	7.5
4SP3-39	3	4		246	193	167	121	974	8.9
4SP3-44	3	4		277	218	188	136	1079	9.9
4SP3-52	3.7	5		328	257	222	161	1247	11.4

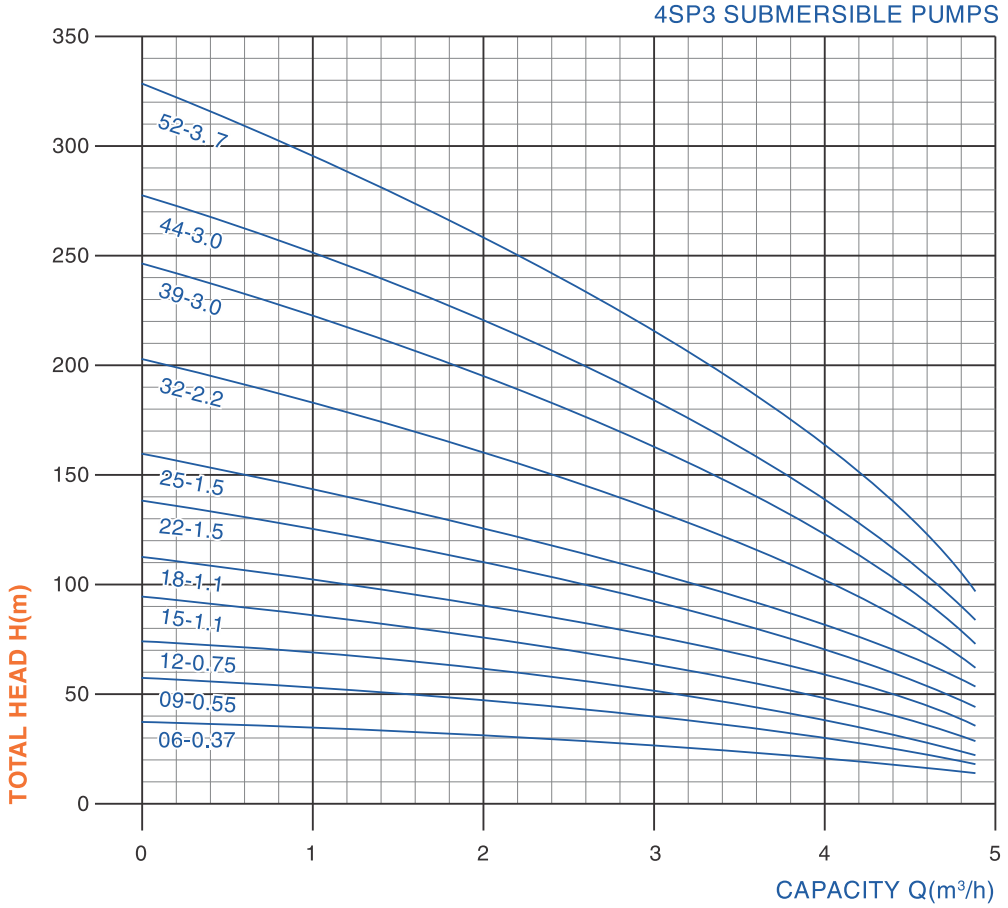



AQUARIS MADE IN ITALY


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ95mm
Highest temperature of liquid: 35°C

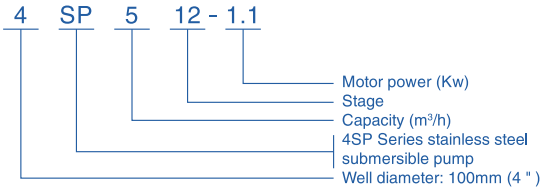




Diffuser height: 21mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G1 1/4 "

TYPE	Motor power		Capacity and head						
			l/min	0	50	83	100	Length	Weight
	KW	Hp	m³/h	0	3	5	6	mm	kg
4SP5-04	0.37	0.5	Head (m)	25	20	16	12	239	1.9
4SP5-06	0.55	0.75		38	30	24	18	281	2.4
4SP5-08	0.75	1		50	40	32	24	323	2.8
4SP5-12	1.1	1.5		76	60	48	36	407	3.6
4SP5-17	1.5	2		107	85	68	51	512	4.7
4SP5-22	2.2	3		139	110	88	66	617	5.7
4SP5-25	2.2	3		159	125	100	75	680	6.4
4SP5-33	3	4		208	165	132	99	848	8.0
4SP5-38	4	5.5		239	190	152	114	953	9.1
4SP5-40	4	5.5		252	200	160	120	995	9.5
4SP5-44	4	5.5		275	220	176	132	1079	10.3
4SP5-52	5.5	7.5		326	260	208	156	1247	12.0

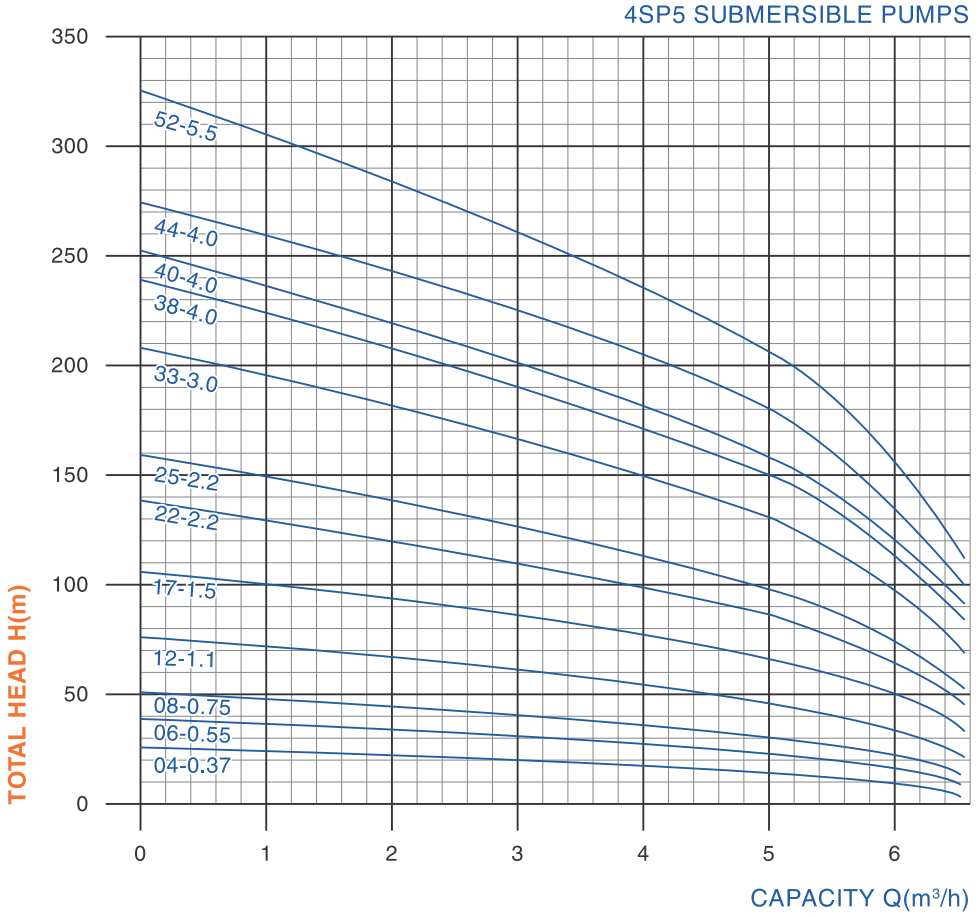

AQUARIS MADE IN ITALY

4" 4SP8 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ95mm
Highest temperature of liquid: 35°C

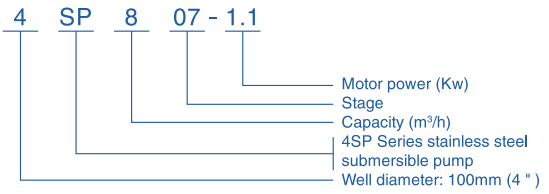


Diffuser height: 27.5mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2 "

TYPE	Motor power		Capacity and head						
			l/min	0	100	133	167	Length	Weight
	KW	Hp	m³/h	0	6	8	10	mm	kg
4SP8-05	0.75	1	Head (m)	33	25	21	15	288	2.6
4SP8-07	1.1	1.5		44	35	30	21	343	3.1
4SP8-10	1.5	2		63	50	43	30	425	3.9
4SP8-12	2.2	3		76	60	51	36	480	4.4
4SP8-14	2.2	3		89	70	60	42	535	5.0
4SP8-18	3	4		114	90	77	54	645	6.0
4SP8-21	4	5.5		133	105	90	63	728	6.8
4SP8-24	4	5.5		152	120	103	72	810	7.6
4SP8-30	5.5	7.5		190	150	129	90	975	9.3
4SP8-35	5.5	7.5		221	175	150	105	1113	10.6
4SP8-40	7.5	10		252	200	172	120	1250	11.9
4SP8-44	7.5	10		278	220	189	132	1360	13.0

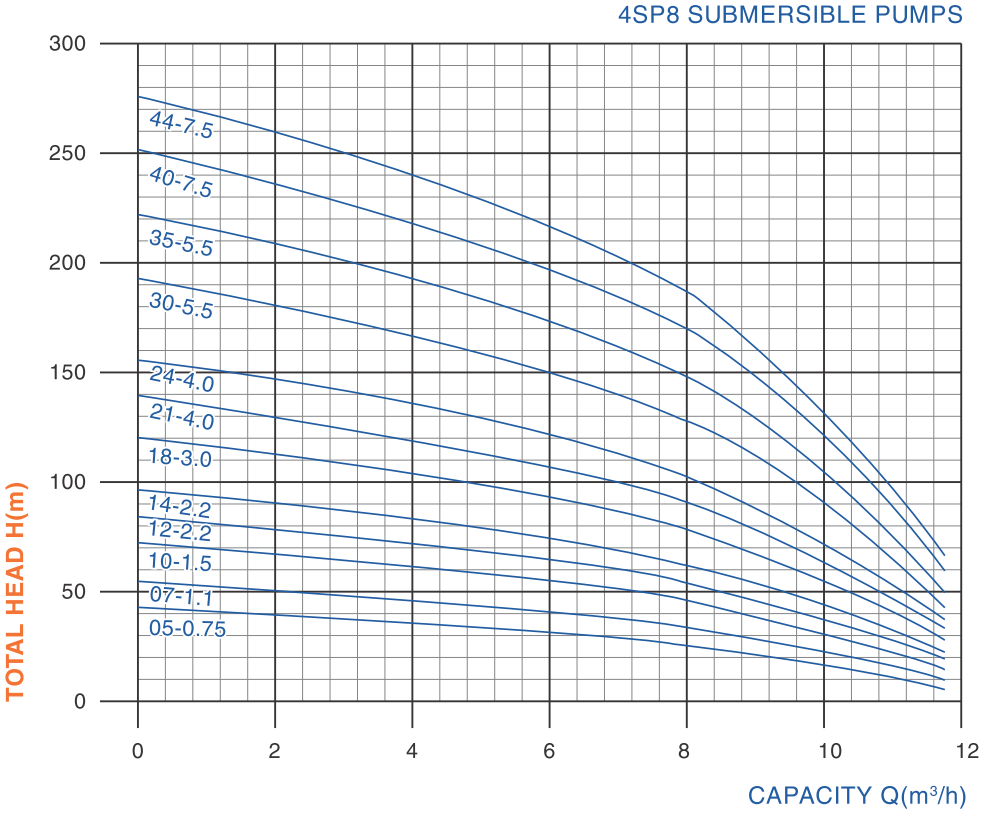



AQUARIS MADE IN ITALY

4" 4SP14 – SUBMERSIBLE PUMP

STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ95mm
Highest temperature of liquid: 35°C

4 SP 14 07 - 2.2

- 4: Well diameter: 100mm (4 ")
- SP: 4SP Series stainless steel submersible pump
- 14: Capacity (m^3/h)
- 07: Stage
- 2.2: Motor power (Kw)




Diffuser height: 50mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2 "

TYPE	Motor power		Capacity and head							
			l/min	0	83	166	233	266	300	Length
	KW	Hp	m^3/h	0	5	10	14	16	18	mm
4SP14-05	1.5	2	Head (m)	34	31	26	22	18	13	415
4SP14-07	2.2	3		47	44	37	31	25	18	515
4SP14-10	3	4		68	62	53	44	36	26	665
4SP14-13	4	5.5		88	81	69	57	47	34	815
4SP14-15	5.5	7.5		102	94	80	66	54	39	915
4SP14-18	5.5	7.5		122	113	96	79	65	47	1065
4SP14-21	7.5	10		142	131	112	93	76	55	1215
4SP14-25	7.5	10		170	157	133	110	90	65	1415

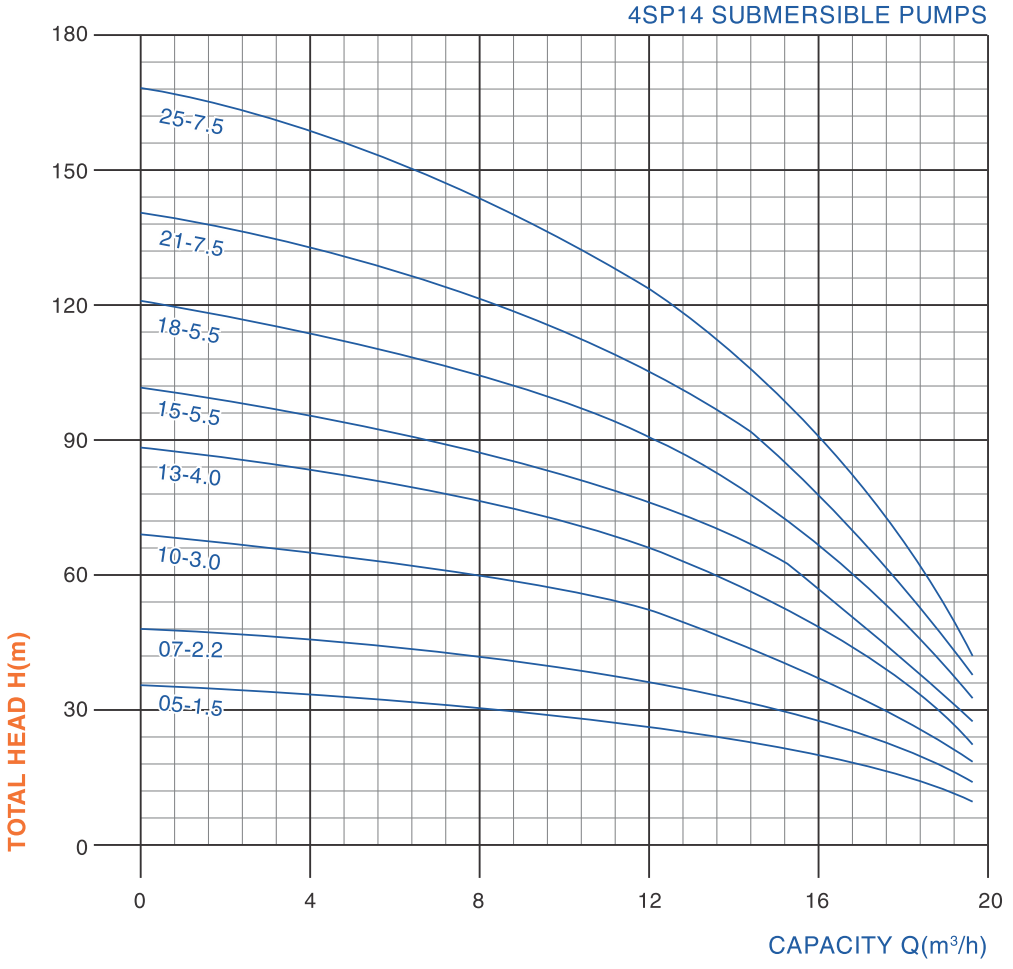

AQUARIS MADE IN ITALY

5" 5SP10 – SUBMERSIBLE PUMP

STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameterϕ125mm
Highest temperature of liquid: 35°C

5 SP 10 8 - 04

- Motor power (Kw)
- Stage
- Capacity (m^3/h)
- 5SP Series stainless steel submersible pump
- Well diameter: 130mm (5 ")

Diffuser height: 48mm


PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^1/_2$ " ~G3"

TYPE	Motor power		Capacity and head								
			l/min	0	83	133	167	200	250	333	Length
	KW	Hp	m^3/h	0	5	8	10	12	15	20	mm
5SP10-03	1.5	2	Head (m)	33	31	29	27	25	21	12	362
5SP10-04	2.2	3		44	41	38	36	33	28	16	410
5SP10-06	3	4		66	62	58	55	49	42	24	506
5SP10-08	4	5.5		88	82	77	73	66	56	32	602
5SP10-11	5.5	7.5		121	113	106	100	90	77	44	746
5SP10-15	7.5	10		165	155	144	137	123	105	60	938
5SP10-18	9.2	12.5		198	185	173	164	148	126	72	1082
5SP10-22	11	15		242	227	211	200	180	154	88	1274
5SP10-26	13	17.5		286	268	250	237	213	182	104	1466
5SP10-30	15	20		330	309	288	273	246	210	120	1658



5SP10 SUBMERSIBLE PUMPS

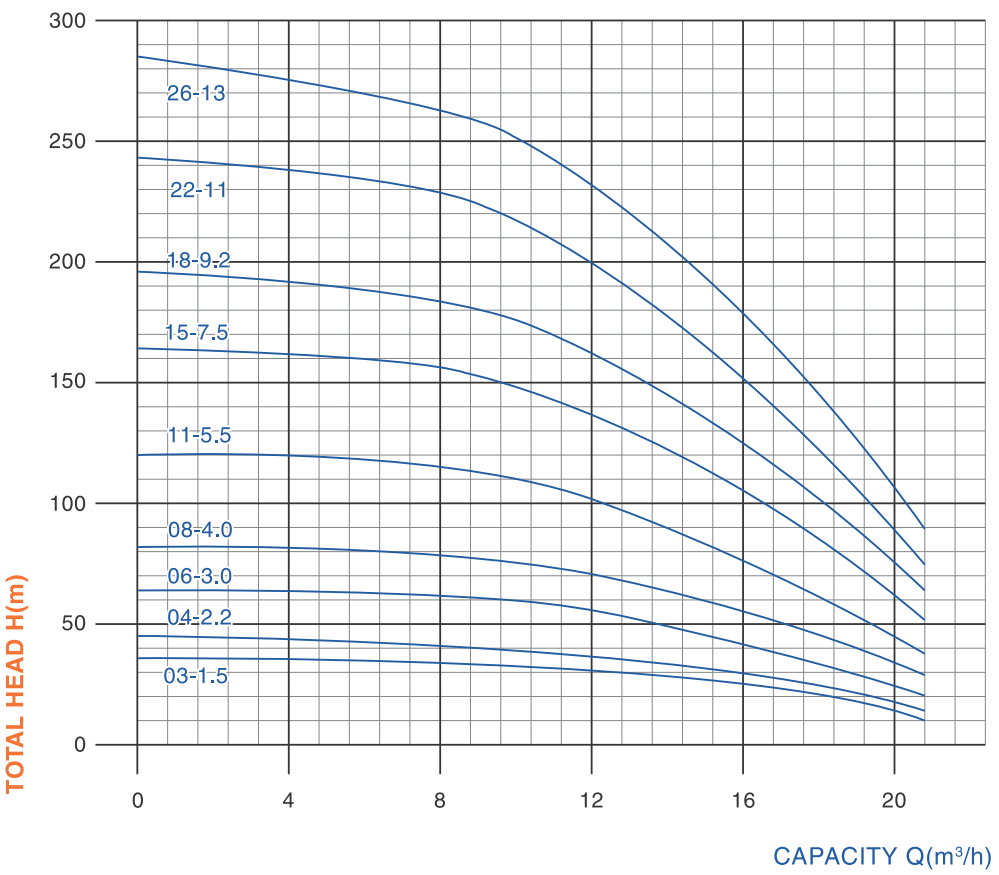

AQUARIS MADE IN ITALY

5" 5SP15 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameterϕ125mm
Highest temperature of liquid: 35°C

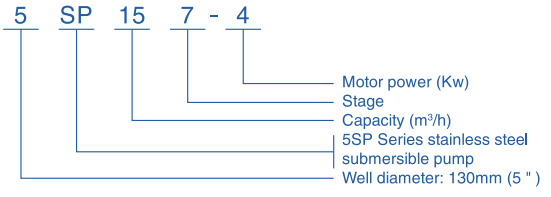




Diffuser height: 48mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^{1}/_{2}$ " ~G3"

TYPE	Motor power		Capacity and head								
			l/min	0	167	200	250	283	333	416	Length
	KW	Hp	m³/h	0	10	12	15	17	20	25	mm
5SP15-03	2.2	3	Head (m)	33	30	28	26	23	18	8	362
5SP15-05	3	4		55	50	46	43	38	30	13	458
5SP15-07	4	5.5		77	70	64	60	53	42	18	554
5SP15-09	5.5	7.5		99	90	83	77	68	54	23	650
5SP15-13	7.5	10		143	130	120	111	99	78	33	842
5SP15-16	9.2	12.5		176	160	147	136	122	96	40	986
5SP15-19	11	15		209	190	175	162	144	114	48	1130
5SP15-22	13	17.5		242	220	202	187	167	132	55	1274
5SP15-25	15	20		275	250	230	213	190	150	63	1418

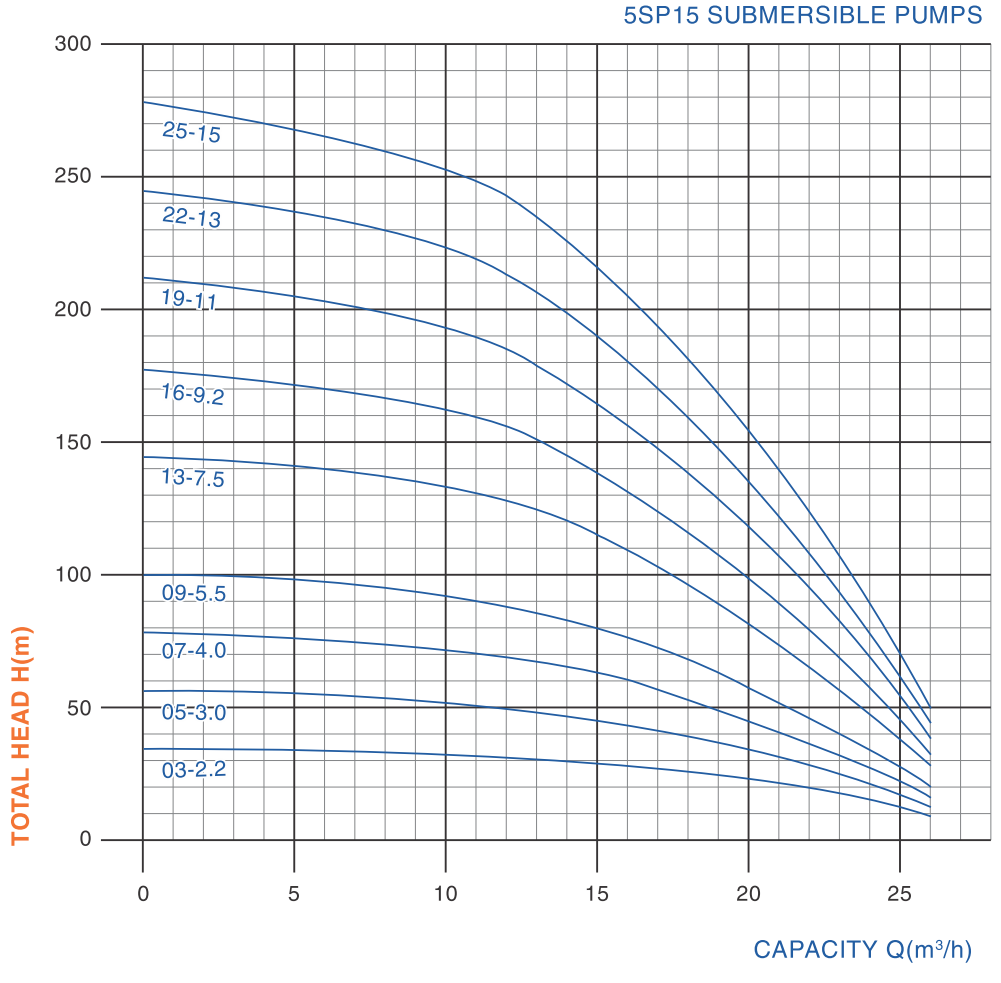

AQUARIS MADE IN ITALY

5" 5SP20 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameterϕ125mm
Highest temperature of liquid: 35°C

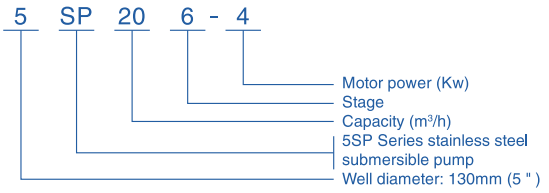


Diffuser height: 56mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^{1}/_{2}$ " ~G3 "

TYPE	Motor power		Capacity and head							
			l/min	0	167	250	333	416	500	Length
	KW	Hp	m³/h	0	10	15	20	25	30	mm
5SP20-3	2.2	3	Head (m)	32	28	26	23	17	11	396
5SP20-4	3	4		42	37	34	30	23	14	452
5SP20-6	4	5.5		63	55	52	45	35	22	564
5SP20-8	5.5	7.5		84	74	69	60	46	29	676
5SP20-11	7.5	10		116	101	95	83	64	40	844
5SP20-13	9.2	12.5		137	120	112	98	75	47	956
5SP20-16	11	15		168	147	138	120	93	58	1124
5SP20-19	13	17.5		200	175	163	143	110	68	1292
5SP20-22	15	20		231	202	189	165	128	79	1460

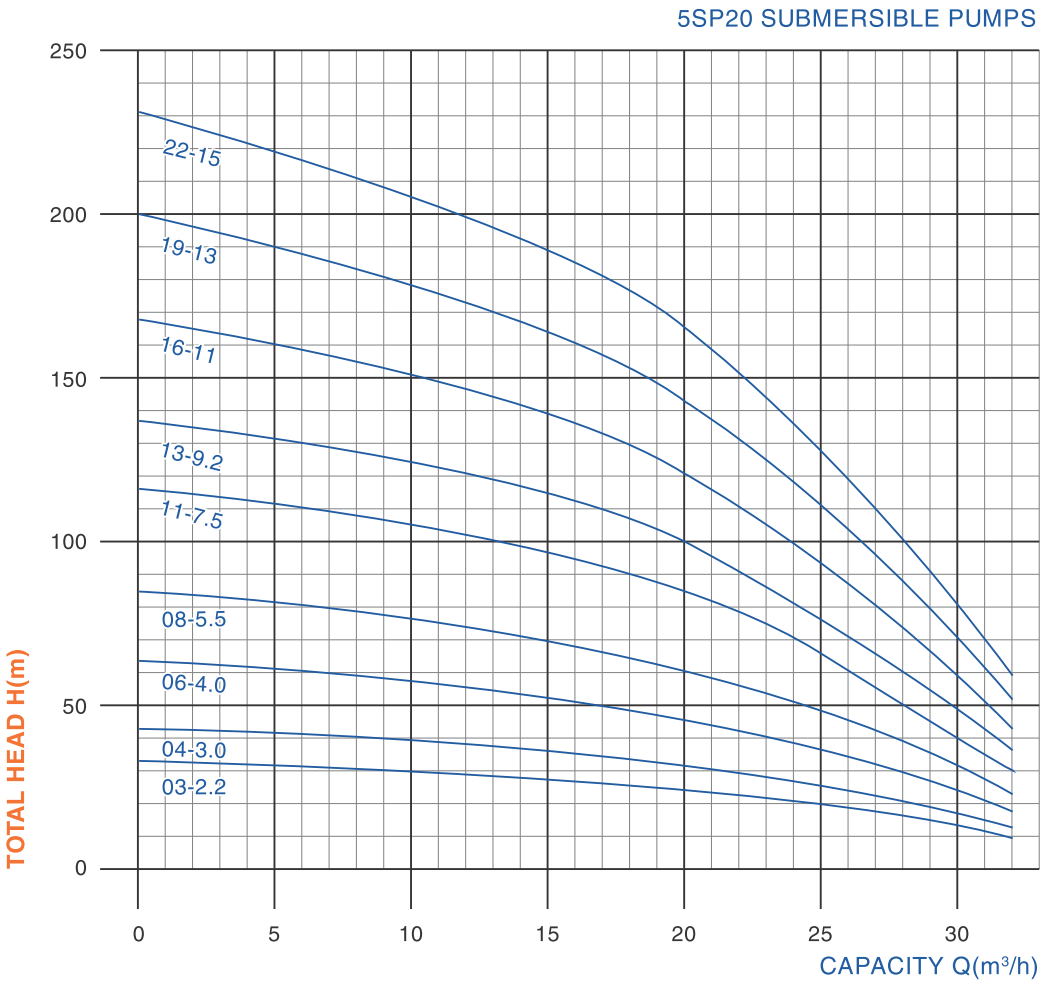



AQUARIS MADE IN ITALY

5SP25 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameterϕ125mm
Highest temperature of liquid: 35°C

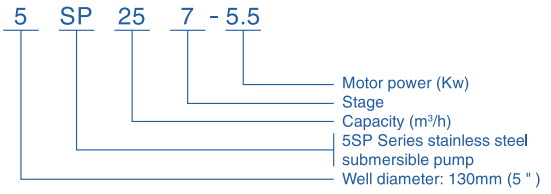




Diffuser height: 56mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^{1}/_{2}$ " ~G3 "

TYPE	Motor power		Capacity and head							
			l/min	0	250	333	416	500	583	Length
	KW	Hp	m³/h	0	15	20	25	30	35	mm
5SP25-2	1.5	2	Head (m)	22	19	18	15	11	7	340
5SP25-3	2.2	3		33	28	26	22	16	11	396
5SP25-4	3	4		44	37	35	30	22	14	452
5SP25-5	4	5.5		55	47	44	37	27	18	508
5SP25-7	5.5	7.5		77	65	62	52	38	25	620
5SP25-10	7.5	10		110	93	88	75	54	36	788
5SP25-12	9.2	12.5		132	112	106	90	65	43	900
5SP25-14	11	15		154	130	123	105	76	50	1012
5SP25-17	13	17.5		187	158	150	127	92	61	1180
5SP25-20	15	20		220	186	176	150	108	72	1348

5SP25 SUBMERSIBLE PUMPS

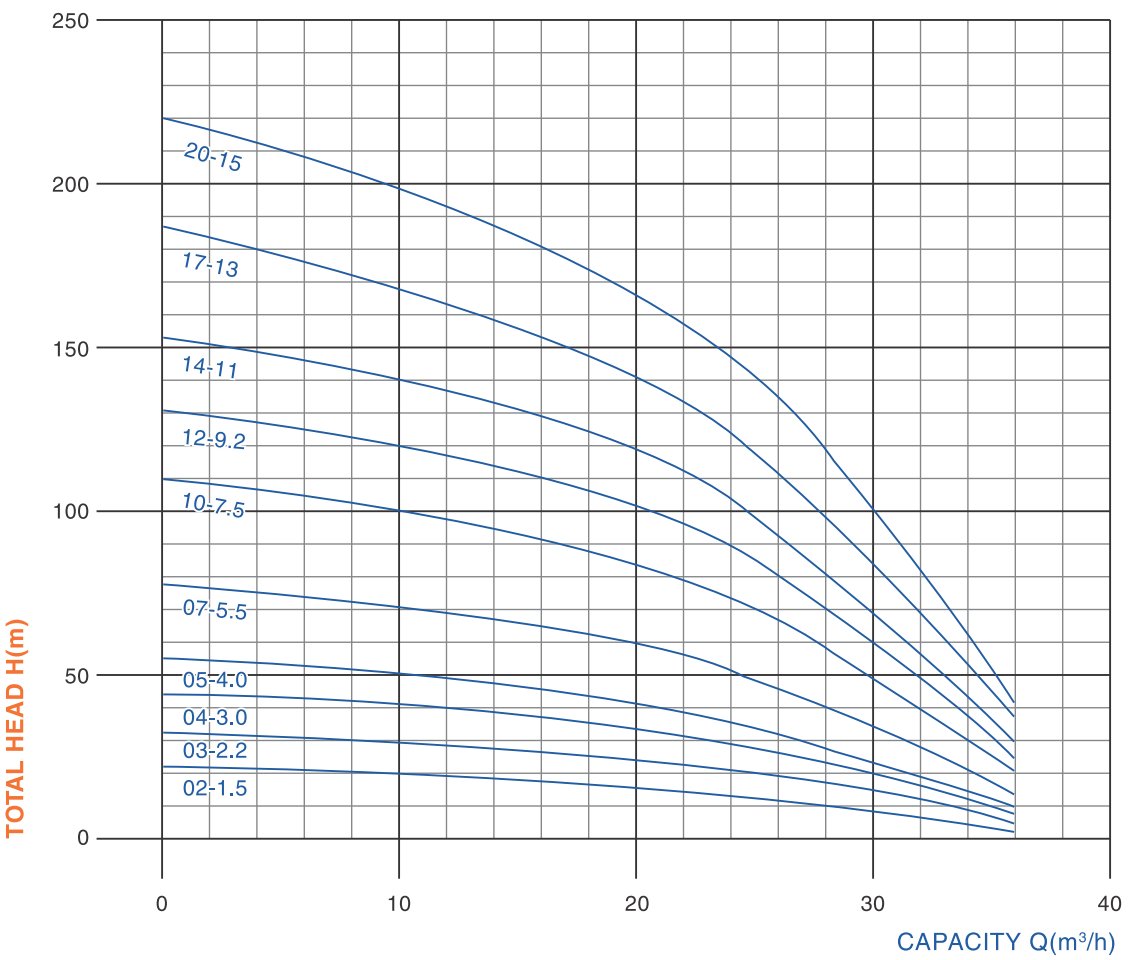

AQUARIS MADE IN ITALY

5" 5SP30 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameterϕ125mm
Highest temperature of liquid: 35°C

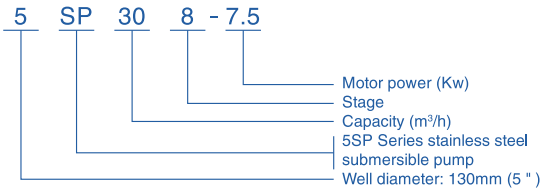

Diffuser height: 56mm


PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^{1}/_{2}$ " ~G3"

TYPE	Motor power		Capacity and head								
			l/min	0	250	333	416	500	583	666	Length
	KW	Hp	m³/h	0	15	20	25	30	35	40	mm
5SP30-3	3	4	Head (m)	33	30	28	24	21	15	9	396
5SP30-4	4	5.5		44	40	37	32	28	20	12	452
5SP30-6	5.5	7.5		66	60	55	49	42	30	18	564
5SP30-8	7.5	10		88	80	74	65	56	40	24	676
5SP30-10	9.2	12.5		110	100	93	82	70	50	30	788
5SP30-12	11	15		132	120	111	98	84	60	36	900
5SP30-14	13	17.5		154	140	130	114	98	70	42	1012
5SP30-16	15	20		176	160	148	131	112	80	48	1124



5SP30 SUBMERSIBLE PUMPS

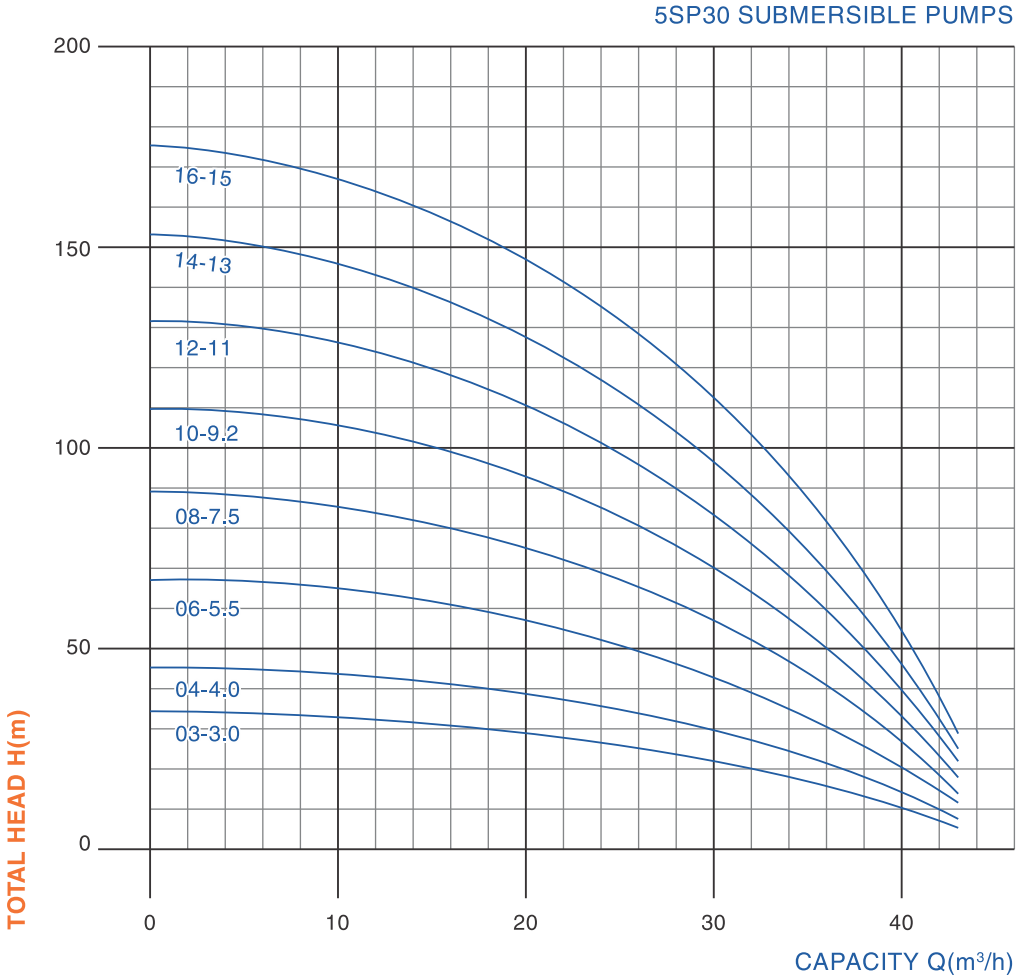

AQUARIS MADE IN ITALY

6SP20 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to + 50°C
Maximum sand content: 0.25%
Minimum well diameter: 6"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ130mm

Warranty: 1 year


(according to our general sales conditions)

6 SP 20 8 – 5.5

- 5.5 — Motor power (Kw)
- 8 — Stage
- 20 — Capacity (m^3/h)
- SP — 6SP Series stainless steel submersible pump
- 6 — Well diameter: 150mm (6 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

6SP20 SUBMERSIBLE PUMPS

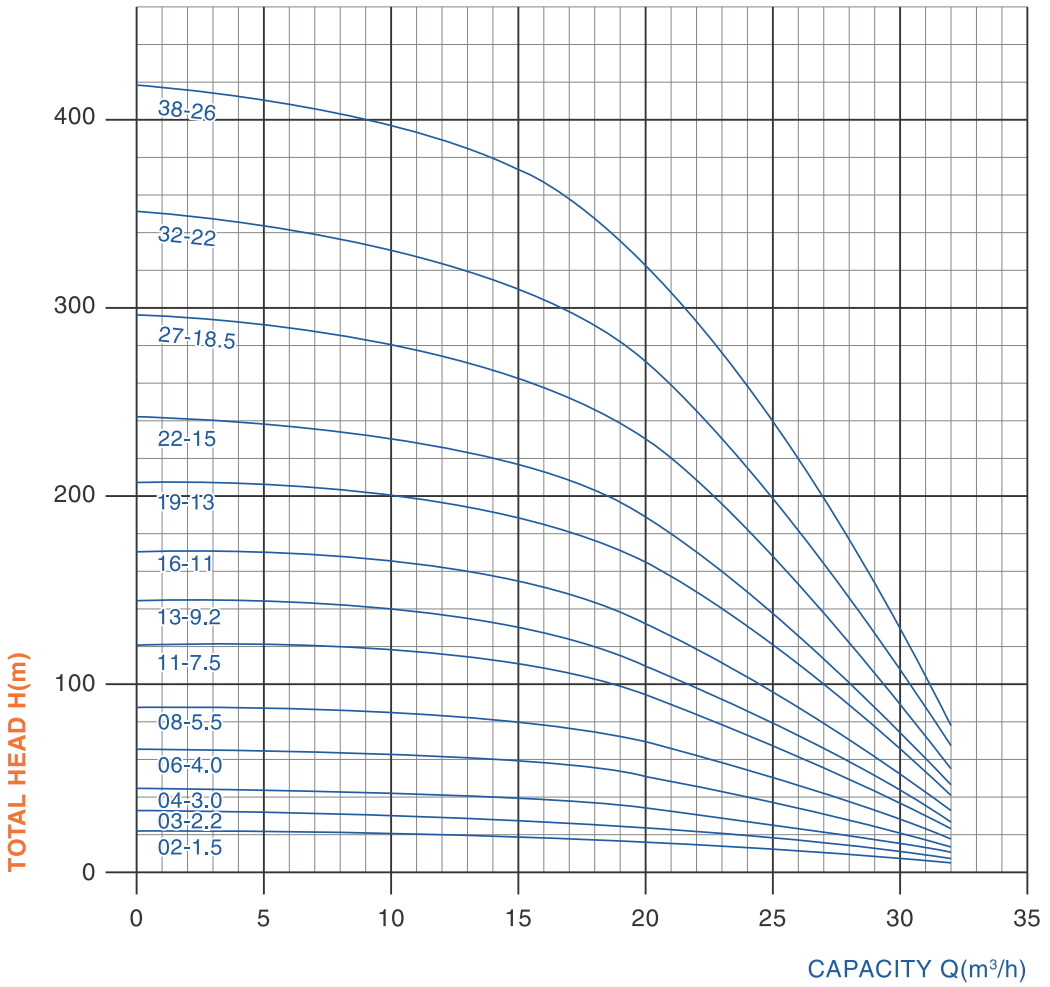

Diffuser height: 56mm

▸ PERFORMANCE TABLE

rpm: 2850 Outlet: G2$^{1}/_{2}$ " ~G3"

TYPE	Motor power		Capacity and head								
			l/min	0	166	250	333	416	500	Length	Weight
	KW	Hp	m³/h	0	10	15	20	25	30	mm	kg
6SP20-2	1.5	2	Head (m)	22	21	19	17	12	6	361	4.6
6SP20-3	2.2	3		33	31	29	26	18	10	406	5.7
6SP20-4	3	4		44	41	38	34	24	13	451	6.8
6SP20-6	4	5.5		66	62	57	51	36	19	541	9.0
6SP20-8	5.5	7.5		88	82	76	68	48	29	631	11.2
6SP20-11	7.5	10		121	113	105	94	66	35	766	14.5
6SP20-13	9.2	12.5		145	136	125	111	78	41	856	16.7
6SP20-16	11	15		176	165	152	136	96	51	991	20
6SP20-19	13	17.5		209	196	181	162	114	61	1126	23.3
6SP20-22	15	20		242	227	209	187	132	70	1261	26.6
6SP20-27	18.5	25		297	278	257	230	163	86	1486	31.1
6SP20-32	22	30		352	330	304	272	192	102	1711	37.6
6SP20-38	26	35		418	391	361	323	228	122	1981	44.2

AQUARIS MADE IN ITALY

6" 6SP30 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to + 50°C
Maximum sand content: 0.25%
Minimum well diameter: 6"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ130mm or ϕ135mm

Warranty: 1 year

(according to our general sales conditions)


6 SP 30 12 – 11

- 11 — Motor power (Kw)
- 12 — Stage
- 30 — Capacity (m^3/h)
- SP — 6SP Series stainless steel submersible pump
- 6 — Well diameter: 150mm (6 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

AQUARIS MADE IN ITALY

6SP30 – SUBMERSIBLE PUMPS

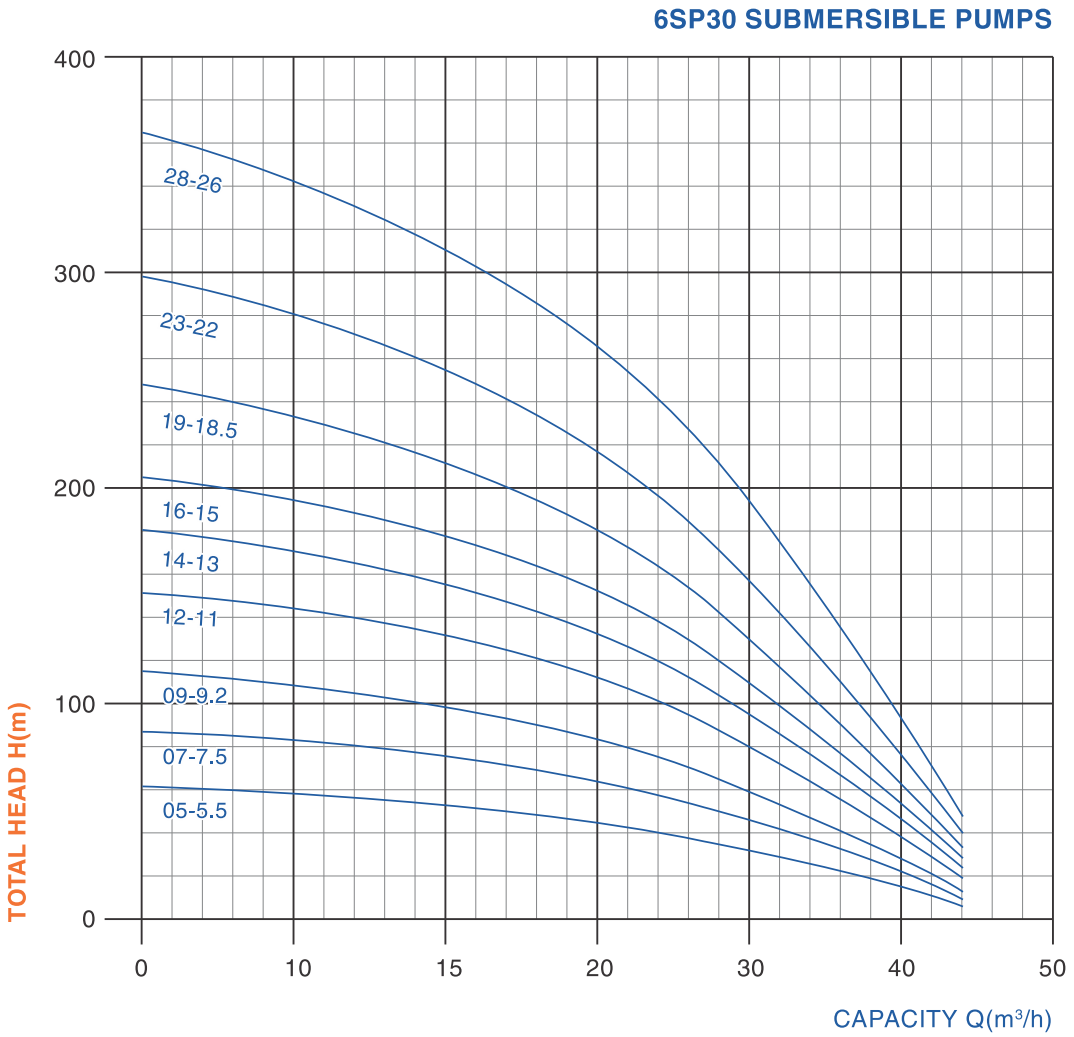

Diffuser height: 96mm
Diffuser height: 56.5mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G3"

TYPE	Motor power		Capacity and head								
			l/min	0	333	416	500	583	666	Length1	Length2
	KW	Hp	m³/h	0	20	25	30	35	40	mm	mm
6SP30-5	5.5	7.5	Head (m)	66	53	47	39	30	18	751	554
6SP30-7	7.5	10		92	74	66	55	42	25	943	667
6SP30-9	9.2	12.5		118	95	85	71	54	32	1135	780
6SP30-12	11	15		157	126	113	94	72	42	1423	949
6SP30-14	13	17.5		184	148	132	110	84	50	1615	1062
6SP30-16	15	20		210	169	151	126	96	57	1807	1175
6SP30-19	18.5	25		249	201	179	150	114	68	2095	1345
6SP30-23	22	30		302	243	217	181	138	82	2479	1571
6SP30-28	26	35		367	296	264	221	168	100	2959	1853

AQUARIS MADE IN ITALY

6" 6SP46 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to + 50°C
Maximum sand content: 0.25%
Minimum well diameter: 6"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ142mm

Warranty: 1 year

(according to our general sales conditions)

6 SP 46 7 – 11


- 11 — Motor power (Kw)
- 7 — Stage
- 46 — Capacity (m^3/h)
- SP — 6SP Series stainless steel submersible pump
- 6 — Well diameter: 150mm (6 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

AQUARIS MADE IN ITALY

6SP46 – SUBMERSIBLE PUMPS

6SP46 SUBMERSIBLE PUMPS

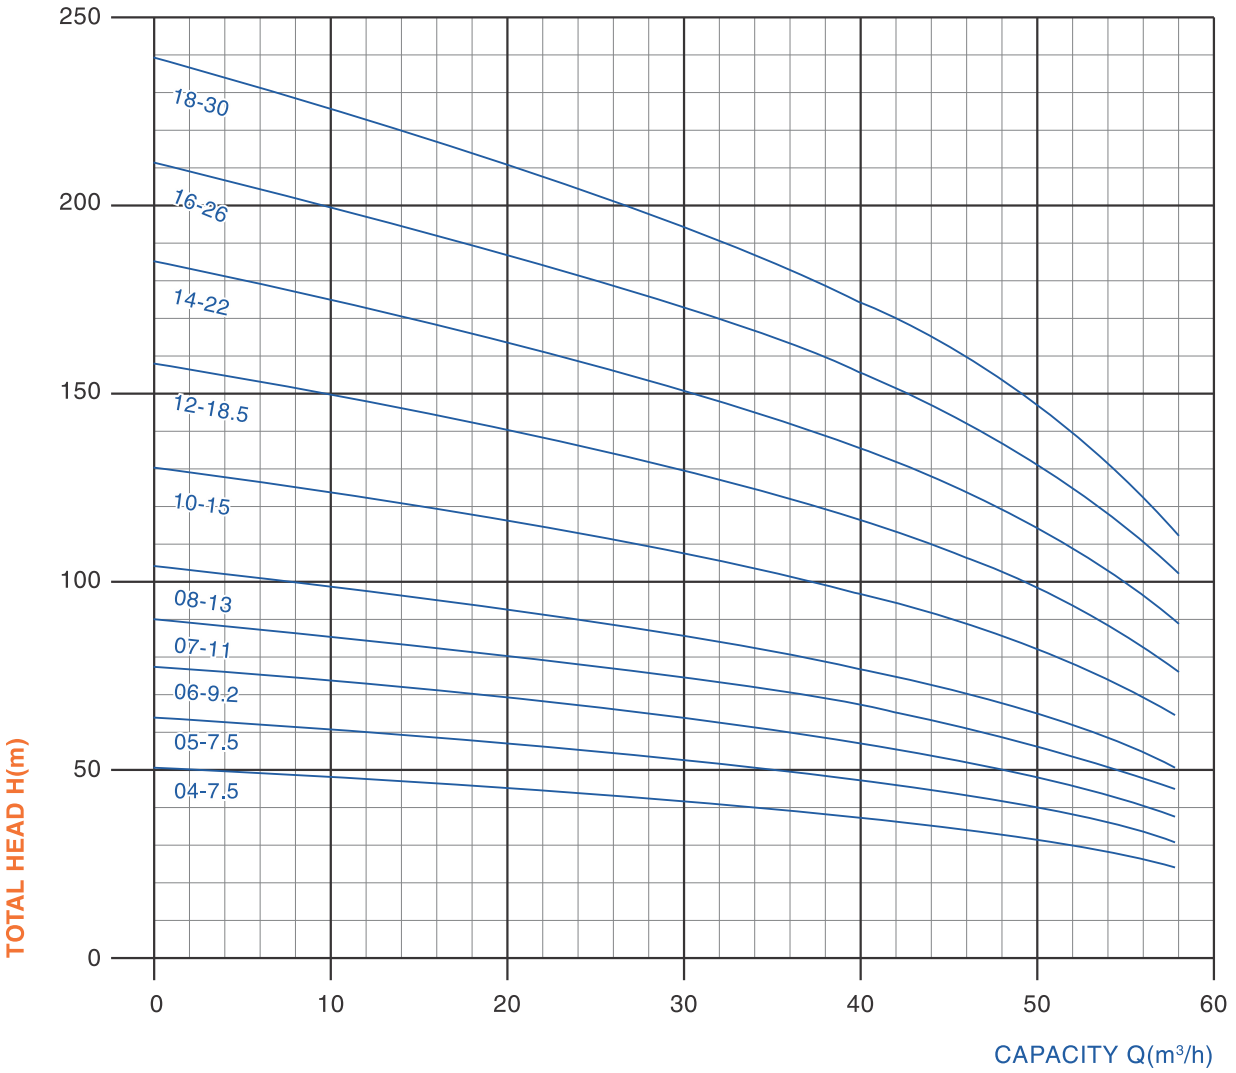

Diffuser height: 113mm

▸ PERFORMANCE TABLE

rpm: 2850 Outlet: G3" ~G4"

TYPE	Motor power		Capacity and head								
			l/min	0	583	666	766	833	916	Length	Weight
	KW	Hp	m³/h	0	35	40	46	50	55	mm	kg
6SP46-04	7.5	10	Head (m)	53	40	38	35	32	28	723	11.7
6SP46-05	7.5	10		66	50	48	44	40	35	836	14.1
6SP46-06	9.2	12.5		79	60	58	53	48	42	949	16.4
6SP46-07	11	15		92	70	67	62	56	49	1062	18.7
6SP46-08	13	17.5		106	80	77	70	64	56	1175	21.1
6SP46-10	15	20		132	100	96	88	80	70	1401	25.7
6SP46-12	18.5	25		158	120	115	106	96	84	1627	30.4
6SP46-14	22	30		185	140	134	123	112	98	1853	35.0
6SP46-16	26	35		211	160	154	141	128	112	2079	39.7
6SP46-18	30	40		238	180	173	158	144	126	2305	44.4

AQUARIS MADE IN ITALY

6SP60 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ142mm

Warranty: 1 year

(according to our general sales conditions)


6 SP 60 6 – 11

- 11 — Motor power (Kw)
- 6 — Stage
- 60 — Capacity (m^3/h)
- SP — 6SP Series stainless steel submersible pump
- 6 — Well diameter: 150mm (6 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

6SP60 – SUBMERSIBLE PUMPS

6SP60 SUBMERSIBLE PUMPS

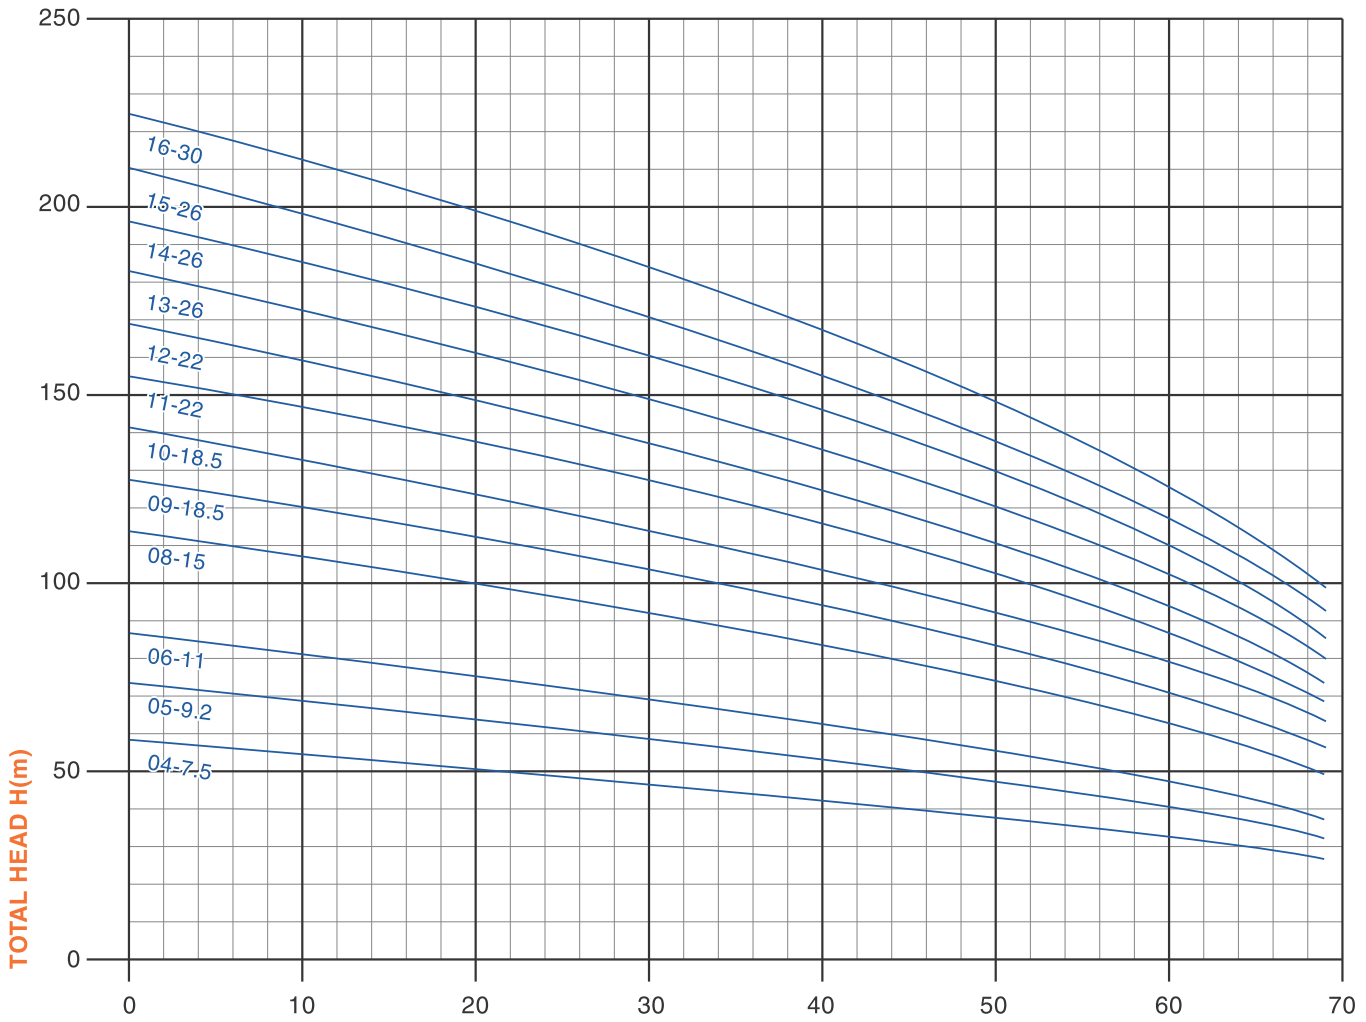

Diffuser height: 113mm

▸ PERFORMANCE TABLE

rpm: 2850 Outlet: G3" ~G4"

TYPE	Motor power		Capacity and head									
			l/min	0	666	750	833	916	1000	1083	Length	Weight
	KW	Hp	m³/h	0	40	45	50	55	60	65	mm	kg
6SP60-04	7.5	10	Head (m)	56	40	39	36	34	31	28	723	12.5
6SP60-05	9.2	12.5		70	51	48	45	42	39	34	836	15.0
6SP60-06	11	15		84	61	57	54	50	46	41	949	17.5
6SP60-08	15	20		112	82	77	72	67	62	55	1175	22.6
6SP60-09	18.5	25		126	93	87	81	75	70	61	1288	25.1
6SP60-10	18.5	25		140	103	96	90	84	78	69	1401	27.6
6SP60-11	22	30		154	116	108	100	93	86	76	1514	30.1
6SP60-12	22	30		168	124	112	110	102	94	83	1627	32.7
6SP60-13	26	35		182	163	127	118	110	102	90	1740	35.2
6SP60-14	26	35		196	146	137	128	119	110	97	1853	37.7
6SP60-15	26	35		210	155	145	135	126	117	104	1966	40.2
6SP60-16	30	40		224	168	156	145	135	125	111	2079	42.7

AQUARIS MADE IN ITALY

8" 8SP77 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ175mm

Warranty: 1 year


(according to our general sales conditions)

8 SP 77 3 – 11

- 11 — Motor power (Kw)
- 3 — Stage
- 77 — Capacity (m^3/h)
- SP — 8SP Series stainless steel submersible pump
- 8 — Well diameter: 200mm (8 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

8SP77 – SUBMERSIBLE PUMPS

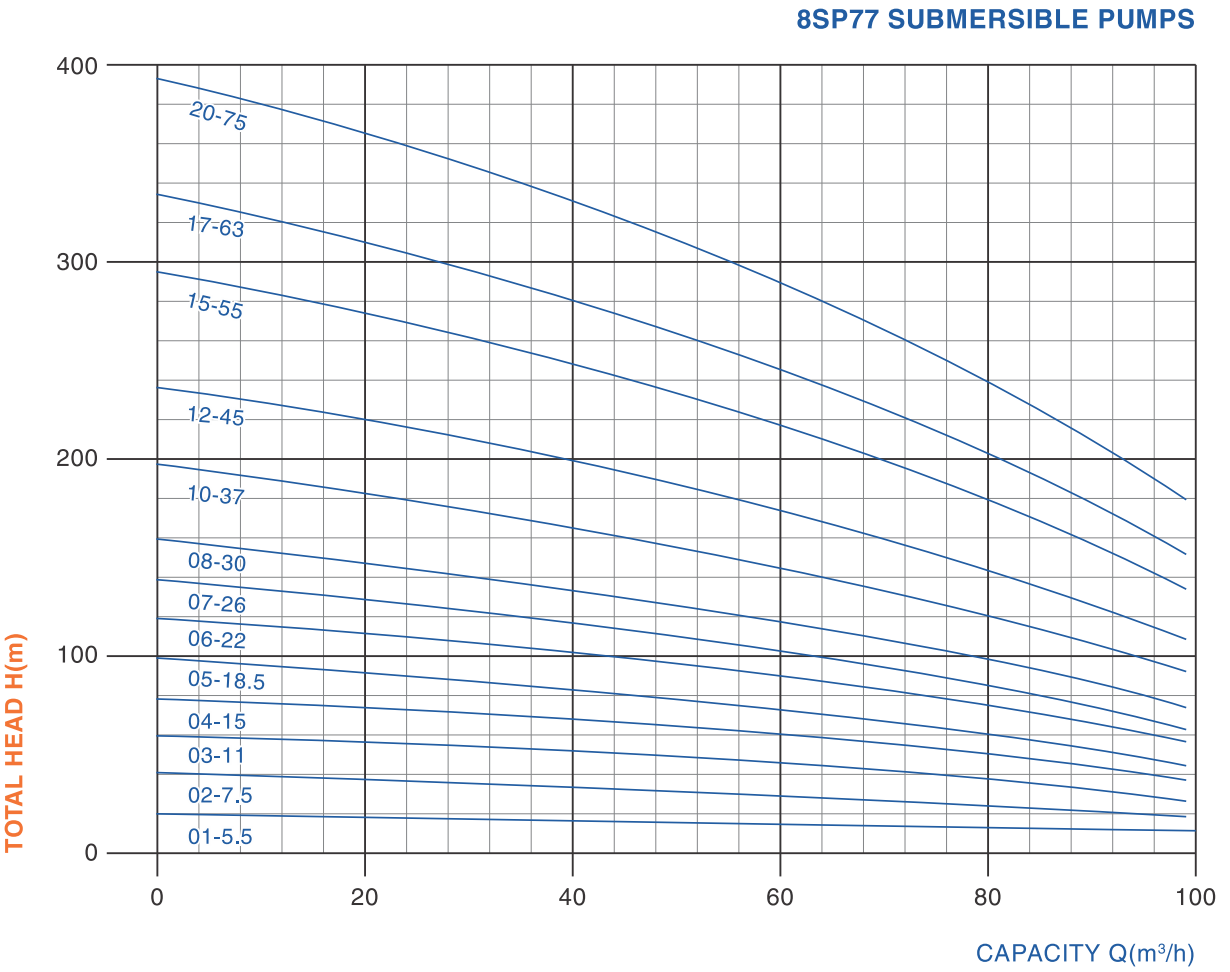

Diffuser height: 128mm
Diffuser height: 104mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G5"

TYPE	Motor power		Capacity and head								
			l/min	0	833	1000	1166	1283	1500	Length1	Weight
	KW	Hp	m³/h	0	50	60	70	77	90	mm	kg
8SP77-01	5.5	7.5	Head (m)	20	16	15	14	13	10	563	18.3
8SP77-02	7.5	10		40	31	30	28	27	21	691	22.5
8SP77-03	11	15		59	49	44	42	40	31	819	29.0
8SP77-04	15	20		79	63	59	56	53	42	947	30.8
8SP77-05	18.5	25		99	78	74	70	67	52	1075	35.5
8SP77-06	22	30		119	94	89	84	80	63	1203	39.2
8SP77-07	26	35		139	110	104	98	93	73	1331	43.3
8SP77-08	30	40		159	125	119	112	107	84	1459	47.5
8SP77-10	37	50		198	157	148	140	133	105	1715	55.8
8SP77-12	45	60		238	188	178	168	160	126	1971	64.2
8SP77-15	55	75		297	235	222	210	200	157	2355	76.7
8SP77-17	63	85		337	266	252	238	227	178	2611	85.0
8SP77-20	75	100		397	313	297	280	267	210	2995	97.5

AQUARIS MADE IN ITALY

8" 8SP95 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ175mm

Warranty: 1 year

(according to our general sales conditions)

8 SP 95 5 – 22


- 22 — Motor power (Kw)
- 5 — Stage
- 95 — Capacity (m^3/h)
- SP — 8SP Series stainless steel submersible pump
- 8 — Well diameter: 200mm (8 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

AQUARIS MADE IN ITALY

8SP95 – SUBMERSIBLE PUMPS

8SP95 SUBMERSIBLE PUMPS

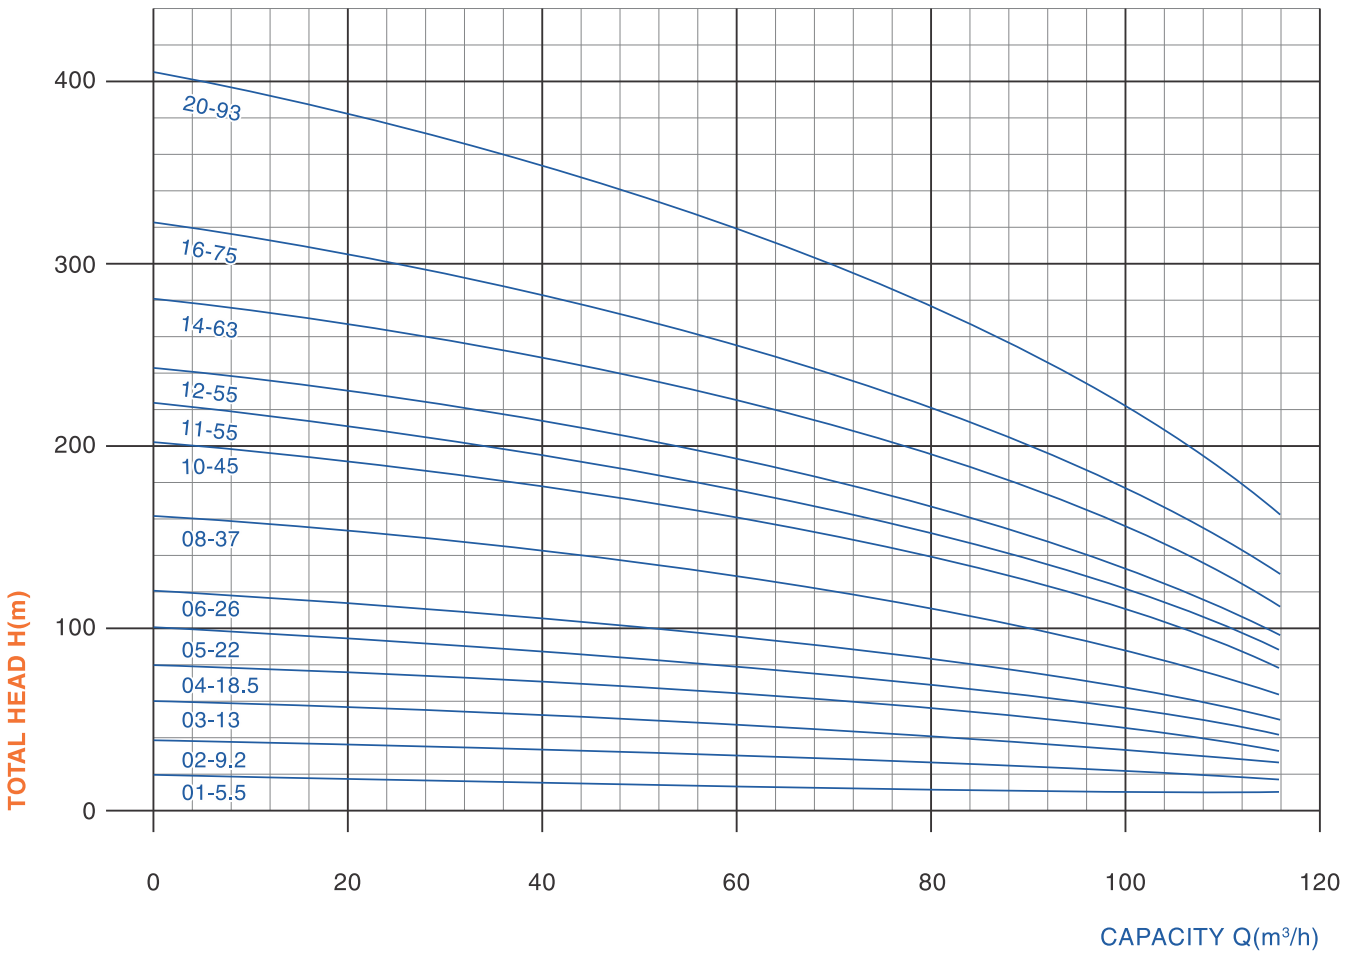

Diffuser height: 128mm
Diffuser height: 104mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G5"

TYPE	Motor power		Capacity and head									
			l/min	0	1000	1333	1500	1583	1666	1833	Length	Weight
	KW	Hp	m³/h	0	60	80	90	95	100	110	mm	kg
8SP95-01	5.5	7.5	Head (m)	21	16	14	13	12	11	9	563	18.3
8SP95-02	9.2	12.5		41	31	28	25	24	22	18	691	22.5
8SP95-03	13	17.5		61	47	41	38	36	33	28	819	26.7
8SP95-04	18.5	25		82	62	55	50	48	45	37	947	30.8
8SP95-05	22	30		102	78	69	63	60	56	46	1075	35.0
8SP95-06	26	35		123	94	83	75	72	67	55	1203	39.2
8SP95-08	37	50		163	124	110	100	93	89	73	1459	47.5
8SP95-10	45	60		204	155	137	125	120	112	92	1715	55.8
8SP95-11	55	75		225	172	152	139	132	123	101	1843	60.0
8SP95-12	55	75		246	187	165	151	144	135	111	1971	64.2
8SP95-14	63	85		285	218	193	176	168	157	129	2227	72.5
8SP95-16	75	100		326	249	220	199	193	179	147	2483	80.8
8SP95-20	93	125		408	312	276	252	240	224	184	2995	97.5

AQUARIS MADE IN ITALY

8"

8SP120 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ175mm

Warranty: 1 year

(according to our general sales conditions)

8 SP 120 5 – 30


- 30 — Motor power (Kw)
- 5 — Stage
- 120 — Capacity (m^3/h)
- SP — 8SP Series stainless steel submersible pump
- 8 — Well diameter: 200mm (8 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

AQUARIS MADE IN ITALY

8SP120 – SUBMERSIBLE PUMPS

8SP120 SUBMERSIBLE PUMPS

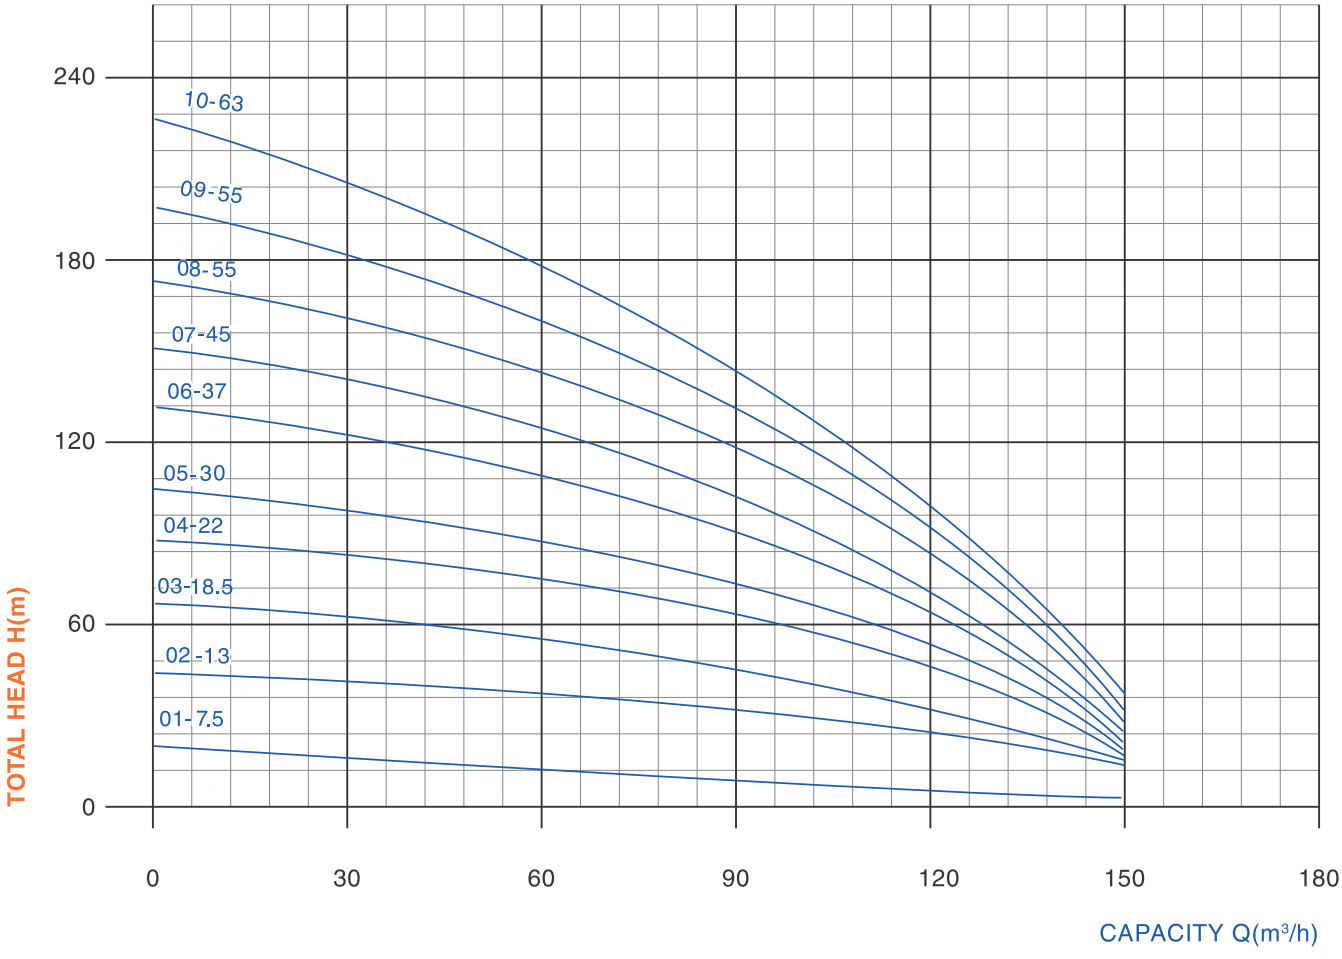

Diffuser height: 128mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G5"

TYPE	Motor power		Capacity and head									
			l/min	0	1000	1666	1833	2000	2166	2500	Length	Weight
	KW	Hp	m³/h	0	60	100	110	120	130	150	mm	kg
8SP120-01	7.5	10	Head (m)	22	17	14	13	12	10	3	563	24
8SP120-02	13	17.5		44	35	28	26	24	20	9	691	28
8SP120-03	18.5	25		66	53	42	39	36	30	10	819	32
8SP120-04	22	30		88	70	57	50	48	40	13	947	36.5
8SP120-05	30	40		110	88	71	65	60	50	16	1075	40.5
8SP120-06	37	50		132	105	85	78	72	60	20	1203	44.5
8SP120-07	45	60		154	123	100	91	84	70	23	1331	49
8SP120-08	55	75		176	140	114	105	96	80	26	1459	53
8SP120-09	55	75		198	158	128	117	108	90	29	1587	57.5
8SP120-10	63	85		220	176	143	130	120	100	32	1715	62

AQUARIS MADE IN ITALY

10" 10SP125 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 10"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ210mm

Warranty: 1 year

(according to our general sales conditions)


10 SP 125 5 – 55

- 55 — Motor power (Kw)
- 5 — Stage
- 125 — Capacity (m^3/h)
- SP — 10SP Series stainless steel submersible pump
- 10 — Well diameter: 250mm (10 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

AQUARIS MADE IN ITALY

10SP125 SUBMERSIBLE PUMPS

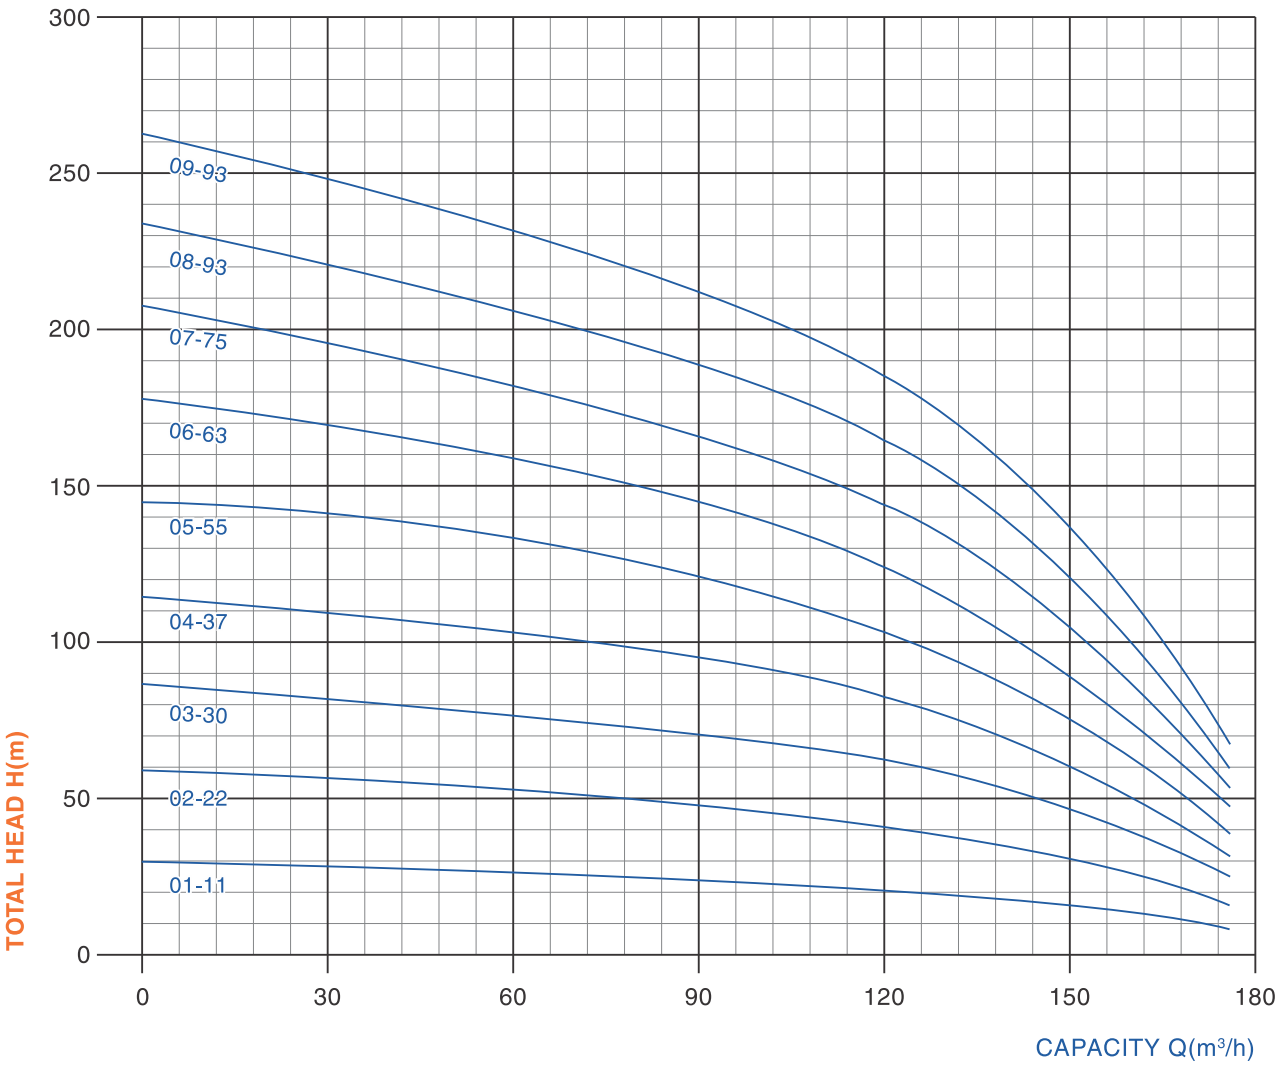

Diffuser height: 156mm

▸ PERFORMANCE TABLE

rpm: 2850 Outlet: G5"

TYPE	Motor power		Capacity and head								
			l/min	0	833	1333	1666	2083	2333	2666	Length
	KW	Hp	m³/h	0	50	80	100	125	140	160	mm
10SP125-01	11	15	Head (m)	30	28	24	22	20	17	13	616
10SP125-02	22	30		59	55	49	45	40	35	26	772
10SP125-03	30	40		87	83	74	67	60	53	40	928
10SP125-04	37	50		115	110	98	91	80	70	52	1084
10SP125-05	55	75		146	141	127	118	100	95	61	1240
10SP125-06	63	85		178	165	142	130	120	100	75	1396
10SP125-07	75	100		208	192	165	152	140	115	89	1552
10SP125-08	93	125		235	220	189	172	160	132	100	1708
10SP125-09	93	125		264	248	214	195	180	150	112	1864

AQUARIS MADE IN ITALY

10" 10SP160 – SUBMERSIBLE PUMPS



Applications

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

Operating conditions

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 10"

Motor and Pump

Rewindable motor or Full obturated screen motor
① Direct start (1 cable)
② Star - delta start (2 cables)
Equip with start control box or digital auto - control box
NEMA dimension standards
Curve tolerance according to ISO2548
Maximum diameter ϕ210mm

Warranty: 1 year

(according to our general sales conditions)


10 SP 160 5 – 63

- 63 — Motor power (Kw)
- 5 — Stage
- 160 — Capacity (m^3/h)
- SP — 10SP Series stainless steel submersible pump
- 10 — Well diameter: 250mm (10 ")

Components	Material
Components	①AISI 304 ②AISI 316ss
Check valve	①AISI 304 ②AISI 316ss
Suction lantern	①AISI 304 ②AISI 316ss
Stage casing	①AISI 304 ②AISI 316ss
Impeller	①AISI 304 ②AISI 316ss
Shaft	①AISI 316 ②AISI 304ss
Shaft coupling	①AISI 316 ②AISI 304ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	①Cast iron G20 UNI5007 ②AISI 304ss
Bottom support	①Cast iron G20 UNI5007 ②AISI 304ss
Seal	①NBR ②Carbon-SIC/TC
Shaft	AISI 304ss-C1045
Thrust bearing	①Ceramic/Carbon ②NSK
Radial bearing	①Ceramic/TC ②NSK

AQUARIS MADE IN ITALY

10SP160 SUBMERSIBLE PUMPS

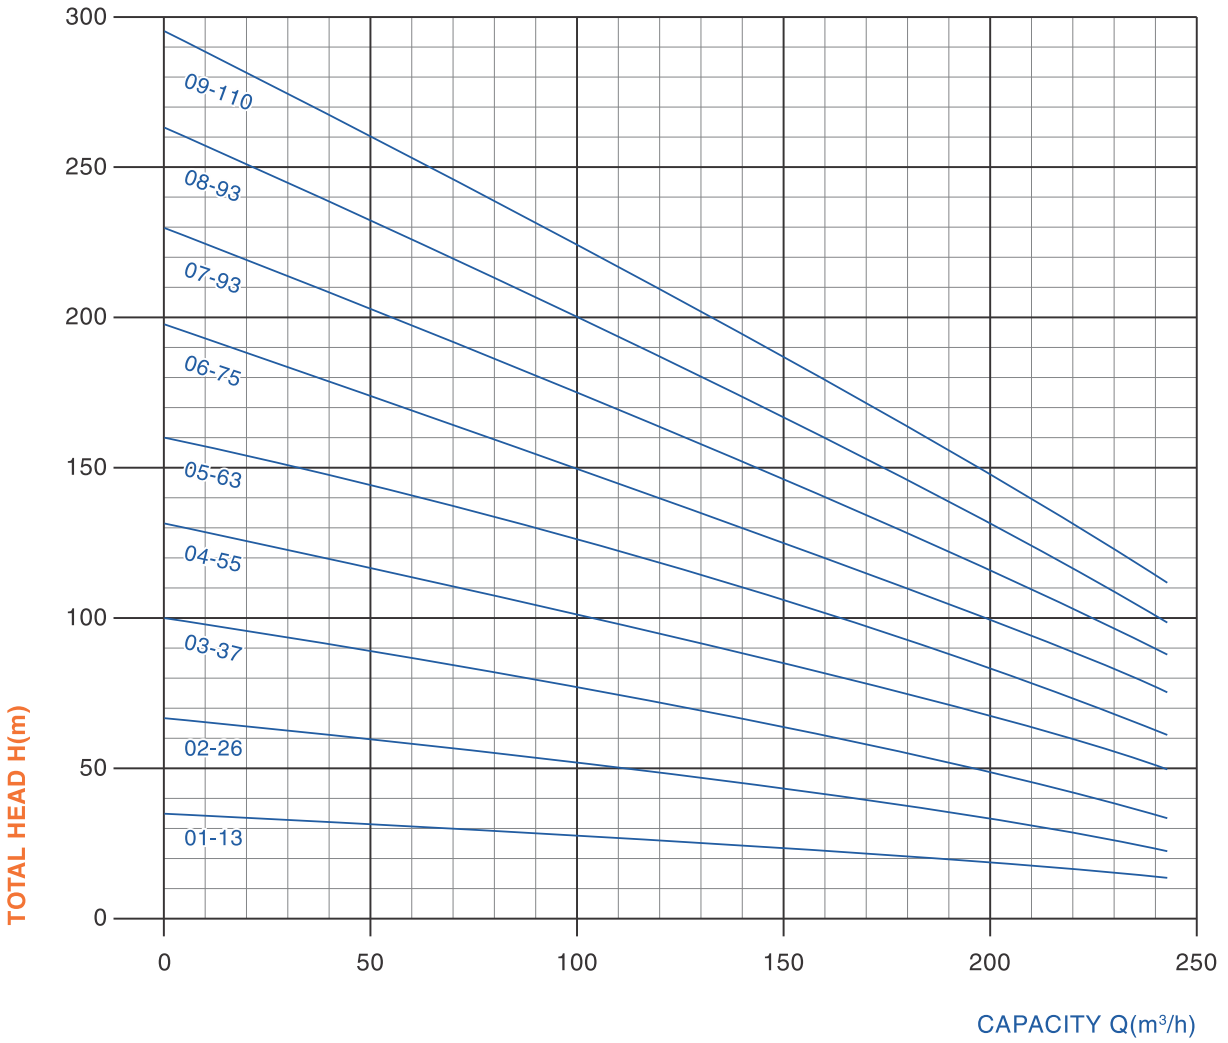

Diffuser height: 156mm

▸ PERFORMANCE TABLE

rpm: 2850 Outlet: G6"

TYPE	Motor power		Capacity and head						
			l/min	0	1666	2000	2666	3000	Length
	KW	Hp	m³/h	0	100	120	160	180	mm
10SP160-01	13	17.5	Head (m)	33	25	23	20	18	616
10SP160-02	26	35		65	50	46	40	36	772
10SP160-03	37	50		99	75	69	60	52	928
10SP160-04	55	75		132	100	92	80	72	1084
10SP160-05	63	85		160	125	115	100	90	1240
10SP160-06	75	100		198	150	138	120	108	1396
10SP160-07	93	125		231	175	161	140	126	1552
10SP160-08	93	125		264	200	183	160	144	1708
10SP160-09	110	150		297	225	205	180	162	1864

AQUARIS MADE IN ITALY