# KTZ SUBMERSIBLE DRAINAGE PUMP

perotac
MADE IN TAIWAN

The body of motor and pump is made of rigid cast iron for long-lasting durability.
Greatly increased maximum submersion depth due to mechanical seal resistant to high pressure.
Semi-open impeller made of high chrome alloy match with wear plate(ductile iron) achieves superior durability.
Effective motor cooling due to discharge channel cast as part of the motor housing.Space economically by a top outlet.
Discharge 50mm(2")to 150mm(6"),motor 1.5kW(2HP) to 15kW (20HP).
Hermetically sealed motor equipped build-in thermal protection for the power below 15kW.





## Specification

- Capacity:up to 160m$^3$/h
- Head:up to 57 meters
- Power:1.5kW(2HP) to 15kW(20HP)
  Power supply:three phase 400V ± 10%, 50Hz
  380V ± 10%, 60Hz
- Insulation class:F
- Protection class:IP68
- Cable length:8m
- Water temperature:up to 40℃
- Max.water depth:25m

## Application


- Civel engineering
- Mines,quarries,coal ore & slurries
- Sewage treatment plants
- General pumping purposes


## Special features on request

- Other voltages
- The length of cable is optional

perotac
MADE IN TAIWAN

# SUBMERSIBLE DRAINAGE PUMP KTZ

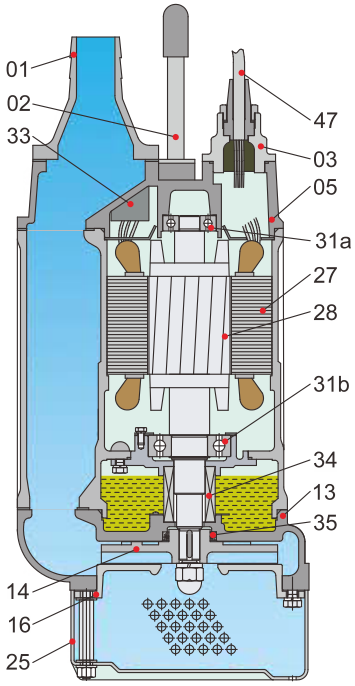

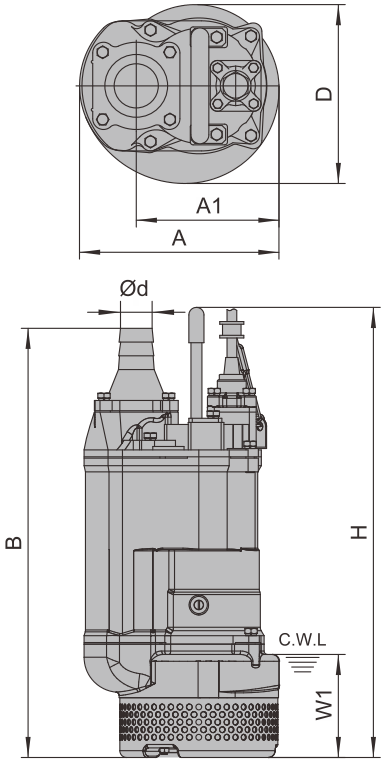
W1:Continuous running water level

## Material of construction

| Item No. | Part name | Material | | Item No. | Part name | Material |
|---|---|---|---|---|---|---|
| 01 | Hose coupling | Cast iron | | 28 | Rotor | Shaft:AISI420SS |
| 02 | Handle | Rubber&steel | | 31a | Bearing | Ball bearing |
| 05 | Upper cover | Cast iron | | 31b | Bearing | Ball bearing |
| 11 | Motor body | Cast iron | | 33 | Motor protector | |
| 13 | Pump body | Cast iron | | 34 | Mechanical seal | Sic-Sic/Carbon-Sic(⩽2.2kW)<br>Sic-Sic/Sic-Sic(⩾3.7kW) |
| 14 | Impeller | High chrome alloy | | | | |
| 16 | Inlet plate | Ductile iron | | 35 | Oil seal | |
| 25 | Strainer | Steel | | 47 | Cable | |
| 27 | Stator | | | | | |


## Dimensions & weights


| Model (50/60Hz) | d | A | A1 | B | D | H | W1 | N.W | G.W | Packing dimension |
|---|---|---|---|---|---|---|---|---|---|---|
| | mm | mm | mm | mm | mm | mm | mm | Kg | Kg | mm |
| KTZ21.5 | 50 | 235 | 173 | 535 | 216 | 505 | 120 | 36 | 40 | 610x265x265 |
| KTZ31.5 | 80 | 235 | 173 | 535 | 216 | 505 | 120 | 36 | 40 | 610x265x265 |
| KTZ22.2 | 50 | 235 | 173 | 535 | 216 | 505 | 120 | 39 | 43 | 610x265x265 |
| KTZ32.2 | 80 | 235 | 173 | 535 | 216 | 505 | 120 | 39 | 43 | 610x265x265 |
| KTZ23.7 | 50 | 283 | 208 | 628 | 252 | 629 | 150 | 63 | 68 | 710x320x295 |
| KTZ33.7 | 80 | 283 | 208 | 628 | 252 | 629 | 150 | 63 | 68 | 710x320x295 |
| KTZ43.7 | 100 | 283 | 208 | 642 | 252 | 629 | 150 | 63 | 68 | 710x320x295 |
| KTZ35.5 | 80 | 283 | 208 | 671 | 252 | 590 | 150 | 77 | 84 | 750x350x360 |
| KTZ45.5 | 100 | 283 | 208 | 686 | 252 | 590 | 150 | 77 | 84 | 750x350x360 |
| KTZ47.5 | 100 | 330 | 240 | 764 | 314 | 676 | 190 | 106 | 116 | 835x365x385 |
| KTZ67.5 | 150 | 330 | 240 | 790 | 314 | 676 | 190 | 108 | 119 | 865x365x385 |
| KTZ411 | 100 | 373 | 255 | 807 | 350 | 695 | 190 | 136 | 148 | 885x415x435 |
| KTZ611 | 150 | 373 | 255 | 807 | 350 | 695 | 190 | 139 | 150 | 885x415x435 |
| KTZ415 | 100 | 373 | 255 | 842 | 350 | 755 | 190 | 144 | 158 | 935x415x435 |
| KTZ615 | 150 | 373 | 255 | 842 | 350 | 755 | 190 | 146 | 160 | 935x415x435 |

# KTZ SUBMERSIBLE DRAINAGE PUMP

perotac MADE IN TAIWAN

## Performance curves

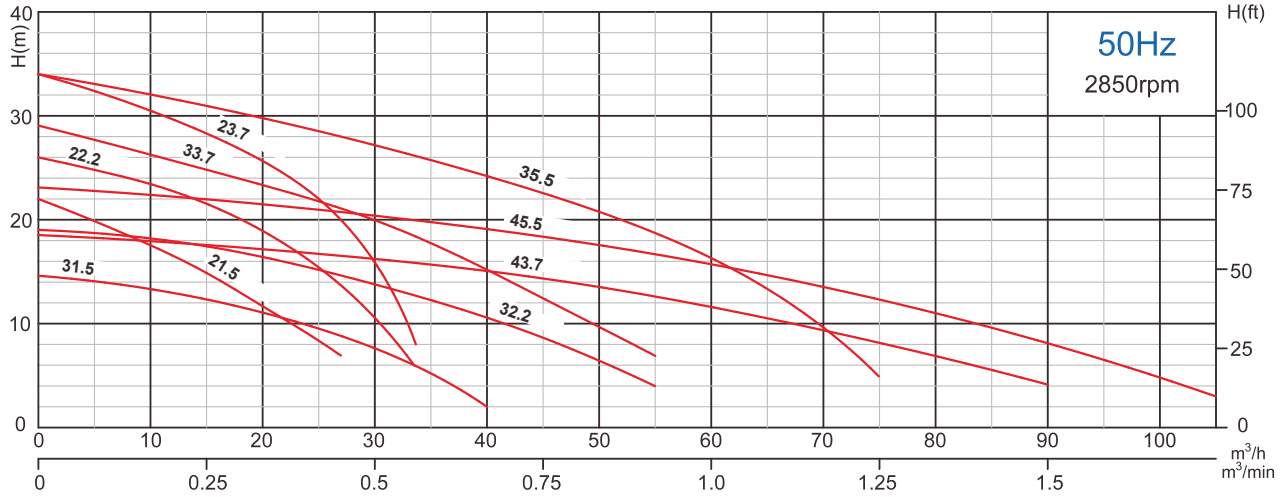

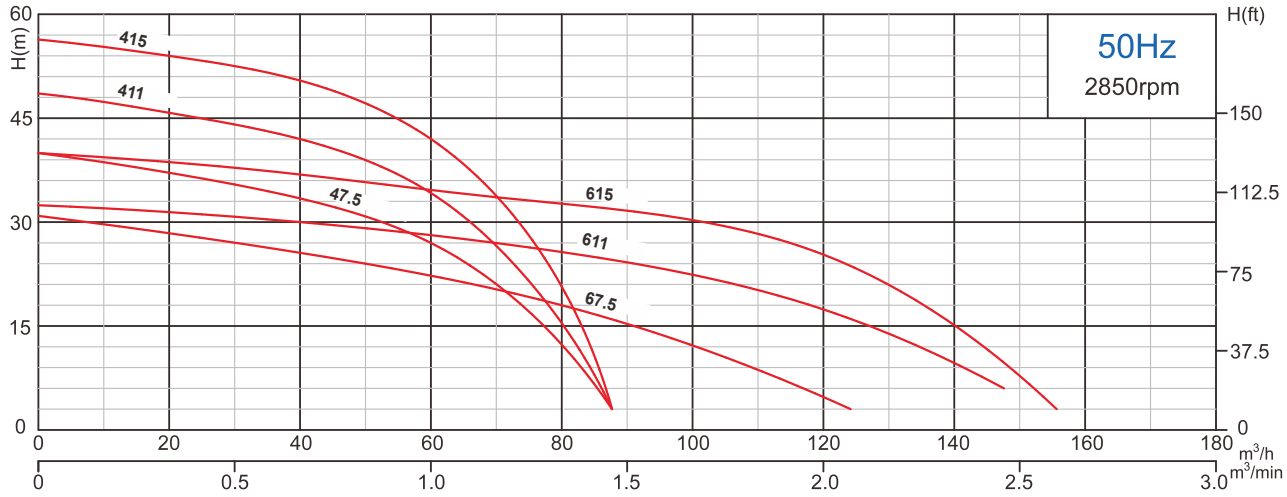

## Performance table


| Model (50Hz) | Outlet | Motor power | | Rated current (400V) | Rated capacity | | Rated head | Max capacity | | Max Head | Impeller Passage |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | mm | kW | HP | A | m³/h | m³/min | m | m³/h | m³/min | m | mm |
| KTZ21.5 | 50 | 1.5 | 2 | 3.5 | 15 | 0.25 | 15 | 27 | 0.45 | 22 | 8.5 |
| KTZ31.5 | 80 | 1.5 | 2 | 3.5 | 30 | 0.50 | 8 | 40 | 0.67 | 14.5 | 8.5 |
| KTZ22.2 | 50 | 2.2 | 3 | 5.0 | 18 | 0.30 | 20 | 33 | 0.55 | 26 | 8.5 |
| KTZ32.2 | 80 | 2.2 | 3 | 5.0 | 36 | 0.60 | 11 | 55 | 0.92 | 19 | 8.5 |
| KTZ23.7 | 50 | 3.7 | 5 | 7.7 | 12 | 0.20 | 30 | 33 | 0.55 | 34 | 8.5 |
| KTZ33.7 | 80 | 3.7 | 5 | 7.7 | 30 | 0.50 | 20 | 55 | 0.92 | 29 | 8.5 |
| KTZ43.7 | 100 | 3.7 | 5 | 7.7 | 60 | 1.0 | 11.5 | 90 | 1.50 | 18.5 | 8.5 |
| KTZ35.5 | 80 | 5.5 | 7.5 | 11.4 | 36 | 0.60 | 25 | 75 | 1.25 | 34 | 8.5 |
| KTZ45.5 | 100 | 5.5 | 7.5 | 11.4 | 60 | 1.0 | 16 | 105 | 1.75 | 23 | 8.5 |
| KTZ47.5 | 100 | 7.5 | 10 | 15 | 48 | 0.80 | 30 | 84 | 1.40 | 40 | 11.5 |
| KTZ67.5 | 150 | 7.5 | 10 | 15 | 90 | 1.60 | 15 | 124.8 | 2.08 | 31 | 19.5 |
| KTZ411 | 100 | 11 | 15 | 22 | 60 | 1.0 | 35 | 84 | 1.40 | 48.5 | 11.5 |
| KTZ611 | 150 | 11 | 15 | 22 | 102 | 1.70 | 22 | 147 | 2.45 | 32 | 19.5 |
| KTZ415 | 100 | 15 | 20 | 29.5 | 60 | 1.0 | 42 | 84 | 1.40 | 56 | 11.5 |
| KTZ615 | 150 | 15 | 20 | 29.5 | 102 | 1.70 | 30 | 156 | 2.60 | 40 | 19.5 |

perotac
MADE IN TAIWAN

SUBMERSIBLE DRAINAGE PUMP **KTZ**

## Performance curves

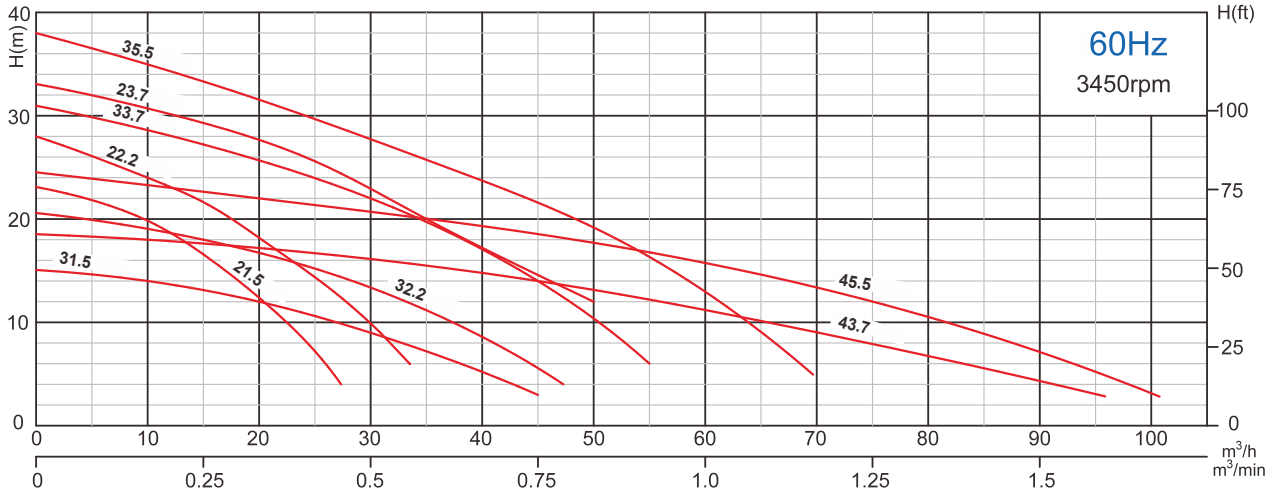

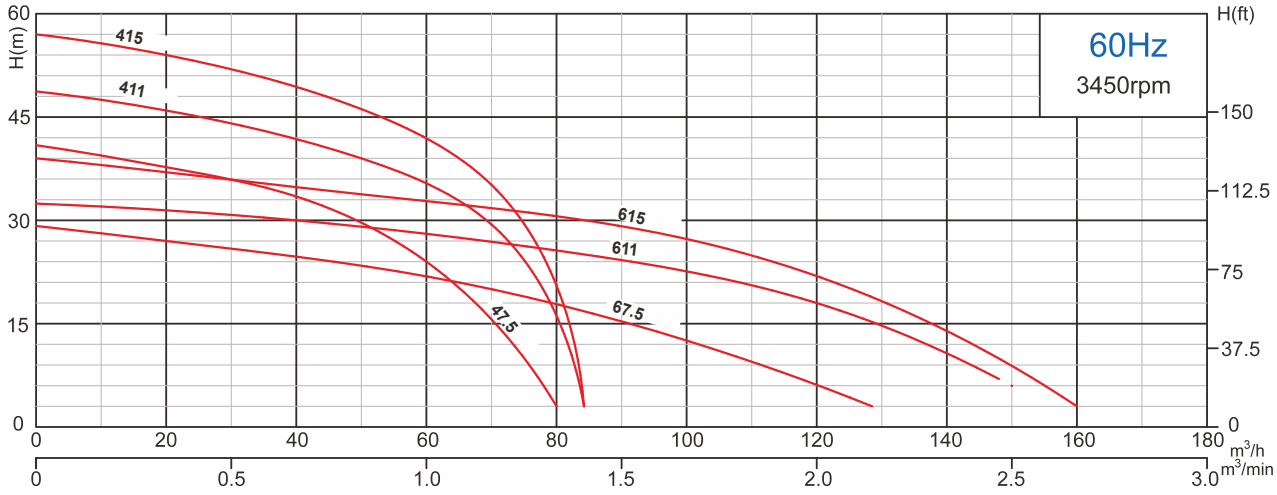
## Performance table

| Model (60Hz) | Outlet | Motor power | | Rated current (380V) | Rated capacity | | Rated head | Max capacity | | Max Head | Impeller Passage |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | mm | kW | HP | A | m³/h | m³/min | m | m³/h | m³/min | m | mm |
| **KTZ21.5** | 50 | 1.5 | 2 | 3.5 | 15 | 0.25 | 16.5 | 27 | 0.45 | 23 | 8.5 |
| **KTZ31.5** | 80 | 1.5 | 2 | 3.5 | 30 | 0.50 | 9 | 45 | 0.75 | 15 | 8.5 |
| **KTZ22.2** | 50 | 2.2 | 3 | 5.1 | 18 | 0.30 | 20 | 31 | 0.52 | 28 | 8.5 |
| **KTZ32.2** | 80 | 2.2 | 3 | 5.1 | 30 | 0.60 | 13 | 47 | 0.78 | 20.5 | 8.5 |
| **KTZ23.7** | 50 | 3.7 | 5 | 8.0 | 12 | 0.20 | 30 | 50 | 0.83 | 33 | 8.5 |
| **KTZ33.7** | 80 | 3.7 | 5 | 8.0 | 30 | 0.50 | 22 | 55 | 0.92 | 31 | 8.5 |
| **KTZ43.7** | 100 | 3.7 | 5 | 8.0 | 60 | 1.0 | 11.5 | 96 | 1.60 | 18.5 | 8.5 |
| **KTZ35.5** | 80 | 5.5 | 7.5 | 11.6 | 36 | 0.60 | 25 | 69 | 1.15 | 38 | 8.5 |
| **KTZ45.5** | 100 | 5.5 | 7.5 | 11.6 | 60 | 1.0 | 16 | 102 | 1.70 | 24.4 | 8.5 |
| **KTZ47.5** | 100 | 7.5 | 10 | 15.4 | 48 | 0.80 | 30 | 80 | 1.33 | 41 | 11.5 |
| **KTZ67.5** | 150 | 7.5 | 10 | 15.4 | 90 | 1.60 | 15 | 127 | 2.12 | 31 | 19.5 |
| **KTZ411** | 100 | 11 | 15 | 22.5 | 60 | 1.0 | 35 | 84 | 1.40 | 48.5 | 11.5 |
| **KTZ611** | 150 | 11 | 15 | 22.5 | 102 | 1.70 | 22 | 147 | 2.45 | 32 | 19.5 |
| **KTZ415** | 100 | 15 | 20 | 30 | 60 | 1.0 | 42 | 84 | 1.40 | 57 | 11.5 |
| **KTZ615** | 150 | 15 | 20 | 30 | 102 | 1.70 | 27 | 160 | 2.67 | 39 | 19.5 |

# LH SUBMERSIBLE DRAINAGE PUMP

perotac MADE IN TAIWAN

The body of motor and pump is made of hard cast iron for long-lasting durability.
Greatly increased maximum submersion depth due to mechanical seal resistant to high preasure.
Hydraulic part under the motor and motor cooled by the pumped water for safe operation also with the pump only partially immersed.The top outlet design maximize the space.
Hermetically sealed motor equipped.
Discharge 100mm(4") to 200mm(8"),motor 22kW (30HP) to 110 kW (150HP).
Motor is dry type submersible induction motor (2 poles).

## Application

- Deep-well pre-dewatering or high-head dewatering
- Civil engineering and construction works
- Mines,quarries,coal ore &slurries
- Sewage treatment plants
- General pumping purposes



## Specification


- Capacity:up to 408m³/h
- Head:up to 205 meters
- Power:22kW (30HP) to 110 kW (150HP)
- Power supply:three phase 400V ± 10%,50Hz
  380V±10%,60Hz
- Insulation class: F
- Protection class: IP68
- Cable length: 20m
- Water temperature:up to 40℃
- Max. water depth: 30m

## Special features on request


- Other voltages
- The length of cable is optional

perotac
MADE IN TAIWAN

# SUBMERSIBLE DRAINAGE PUMP LH

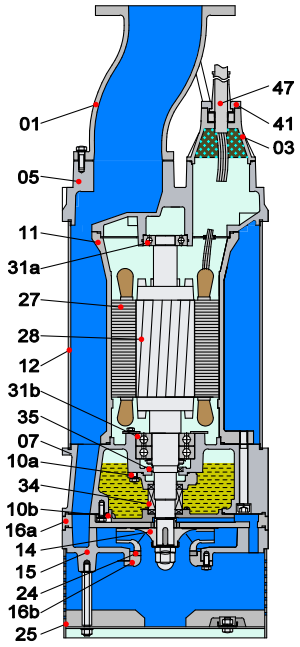


22-75kW

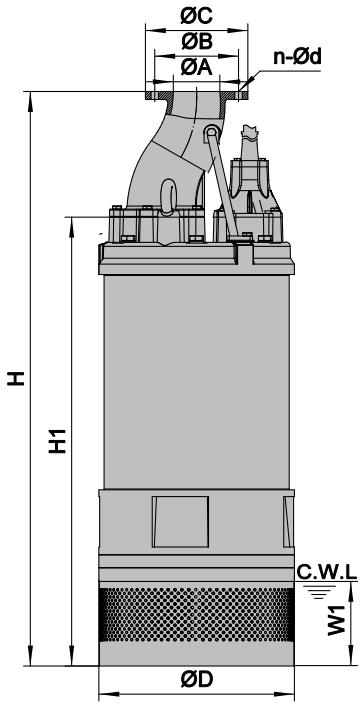


C.W.L:Continuous running water level

## Material of construction

| Item No. | Part name | Material | | Item No. | Part name | Material |
|---|---|---|---|---|---|---|
| 01 | Hose coupling | Ductile iron | | 16b | Inlet plate | Cast iron |
| 03 | Terminal box | Cast iron | | 24 | Neck ring | High chrome alloy |
| 05 | Upper cover | Cast iron | | 25 | Strainer | AISI304SS |
| 07 | Bearing house | Cast iron | | 27 | Stator | |
| 10a | Seal bracket | Cast iron | | 28 | Rotor | Shaft:AISI420SS |
| 10b | Seal bracket | Cast iron | | 31a | Bearing | Ball bearing |
| 11 | Motor body | Cast iron | | 31b | Bearing | Ball bearing |
| 12 | Outer casing | Steel | | 34 | Mechanical seal | Tc-Sic/Sic-Sic |
| 14 | Impeller | High chrome alloy | | 35 | Oil seal | |
| 15 | Diffuser | Ductile iron | | 41 | Shim | Cast iron |
| 16a | Inlet plate | Ductile iron | | 47 | Cable | |

## Dimensions & weights


| Model (50/60Hz) | A | B | C | n-Ød | D | H | H1 | W1 | N.W | G.W | Packing dimension |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | mm | mm | mm | mm | mm | mm | mm | mm | Kg | Kg | mm |
| LH422 | 100 | 180 | 220 | 8-Ø17.5 | 420 | 1374 | 1072 | 240 | 370 | 410 | 1495x490x700 |
| LH430 | 100 | 180 | 220 | 8-Ø17.5 | 420 | 1374 | 1072 | 240 | 375 | 415 | 1495x490x700 |
| LH622 | 150 | 240 | 285 | 8-Ø22 | 420 | 1434 | 1082 | 250 | 385 | 425 | 1565x490x700 |
| LH630 | 150 | 240 | 285 | 8-Ø22 | 420 | 1434 | 1082 | 250 | 390 | 430 | 1565x490x700 |
| LH637 | 150 | 240 | 285 | 8-Ø22 | 530 | 1424 | 1072 | 180 | 570 | 615 | 1555x600x850 |
| LH645 | 150 | 240 | 285 | 8-Ø22 | 530 | 1424 | 1072 | 180 | 575 | 620 | 1555x600x850 |
| LH837 | 200 | 295 | 340 | 12-Ø22 | 530 | 1474 | 1072 | 180 | 575 | 625 | 1605x600x850 |
| LH845 | 200 | 295 | 340 | 12-Ø22 | 530 | 1474 | 1072 | 180 | 580 | 630 | 1605x600x850 |
| LH655 | 150 | 240 | 285 | 8-Ø22 | 550 | 1630 | 1280 | 200 | 830 | 880 | 1765x620x910 |
| LH675 | 150 | 240 | 285 | 8-Ø22 | 550 | 1630 | 1280 | 200 | 830 | 880 | 1765x620x910 |
| LH855 | 200 | 295 | 340 | 12-Ø22 | 550 | 1680 | 1280 | 200 | 880 | 930 | 1815x620x910 |
| LH875 | 200 | 295 | 340 | 12-Ø22 | 550 | 1680 | 1280 | 200 | 880 | 930 | 1815x620x910 |
| LH690 | 150 | 250 | 300 | 8-Ø26 | 592 | 1687 | 1282 | 200 | 1110 | 1166 | 1825x665x965 |
| LH890 | 200 | 295 | 340 | 12-Ø22 | 592 | 1687 | 1282 | 200 | 1120 | 1176 | 1825x665x965 |
| LH6110 | 150 | 250 | 300 | 8-Ø26 | 592 | 1793 | 1388 | 370 | 1245 | 1301 | 1875x665x965 |
| LH8110 | 200 | 295 | 340 | 12-Ø22 | 592 | 1687 | 1282 | 200 | 1150 | 1206 | 1825x665x965 |


# LH


## SUBMERSIBLE DRAINAGE PUMP


perotac
MADE IN TAIWAN

## Performance curves

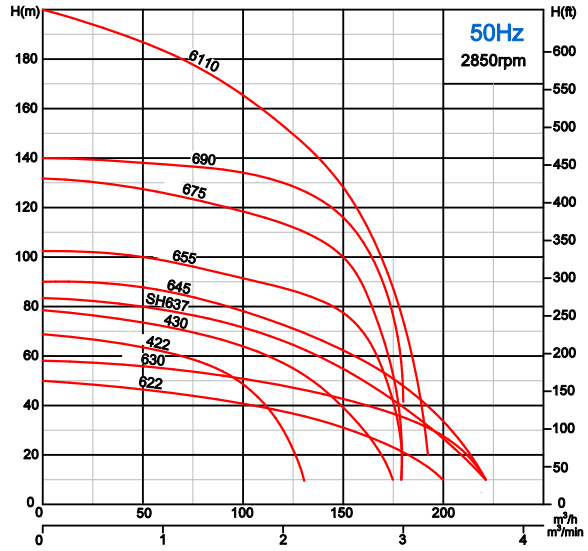

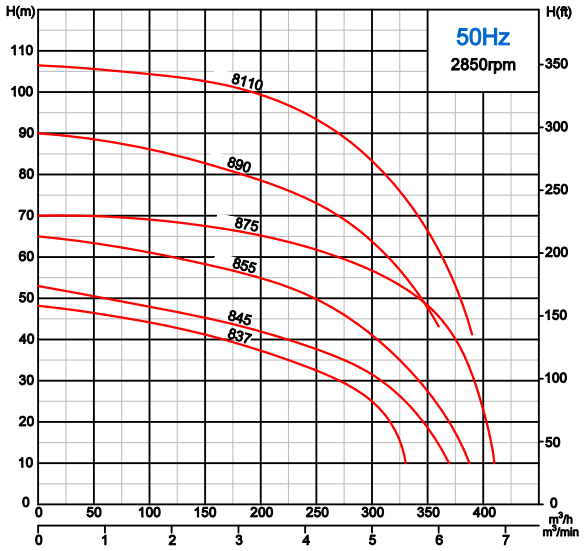
## Performance table
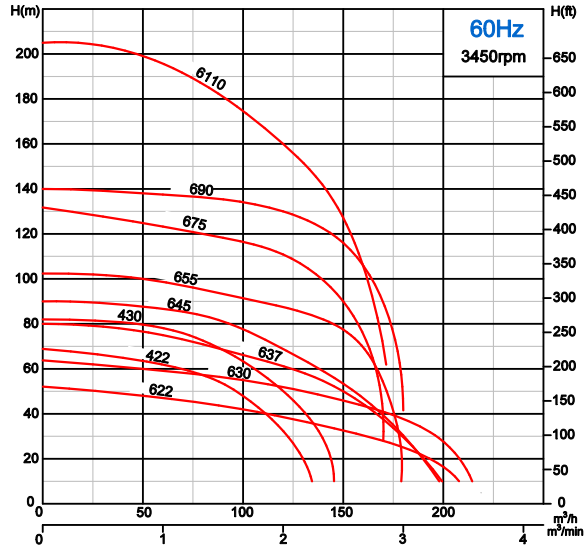
| Model (50/60Hz) | Outlet | Motor power | | Rated current | Rated capacity | | Rated Head | Max capacity | | Max Head | Impeller Passage |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | mm | kW | HP | A | m³/h | m³/min | m | m³/h | m³/min | m | mm |
| LH422 | 100 | 22 | 30 | 41.5 | 66 | 1.1 | 60 | 130/138 | 2.17/2.3 | 68 | 6 |
| LH430 | 100 | 30 | 40 | 54 | 72 | 1.2 | 70/75 | 170/144 | 2.83/2.4 | 78/82 | 6 |
| LH622 | 150 | 22 | 30 | 41.5 | 120 | 2.0 | 37/40 | 200/210 | 3.33/3.5 | 50/52 | 15 |
| LH630 | 150 | 30 | 40 | 54 | 140 | 2.33 | 45/48 | 220/216 | 3.67/3.6 | 58/64 | 15 |
| LH637 | 150 | 37 | 50 | 66 | 120/100 | 2.0/1.7 | 65 | 220/198 | 3.67/3.3 | 83/80 | 6 |
| LH645 | 150 | 45 | 60 | 80 | 120/100 | 2.0/1.7 | 75 | 220/198 | 3.67/3.3 | 90 | 6 |
| LH837 | 200 | 37 | 50 | 66 | 216 | 3.6 | 35 | 330/306 | 5.5/5.1 | 48/50 | 20 |
| LH845 | 200 | 45 | 60 | 80 | 270 | 4.5 | 35 | 372/305 | 6.2/5.1 | 53/56 | 20 |
| LH655 | 150 | 55 | 75 | 100 | 90 | 1.5 | 90 | 180 | 3.0 | 102 | 8 |
| LH675 | 150 | 75 | 100 | 134 | 90 | 1.5 | 120 | 180/168 | 3.0/2.8 | 132 | 8 |
| LH855 | 200 | 55 | 75 | 100 | 240 | 4.0 | 50 | 390 | 6.5 | 65 | 20 |
| LH875 | 200 | 75 | 100 | 134 | 270 | 4.5 | 60 | 408/348 | 6.8/5.8 | 70/78 | 20 |
| LH690 | 150 | 90 | 120 | 162 | 120 | 2.0 | 128 | 180 | 3.0 | 140 | 10 |
| LH890 | 200 | 90 | 120 | 162 | 270 | 4.5 | 70 | 360 | 6.0 | 90 | 20 |
| LH6110 | 150 | 110 | 150 | 198 | 120 | 2.0 | 150/160 | 192/171 | 3.2/2.85 | 200/205 | 8 |
| LH8110 | 200 | 110 | 150 | 198 | 270 | 4.5 | 90 | 390 | 6.5 | 107 | 20 |

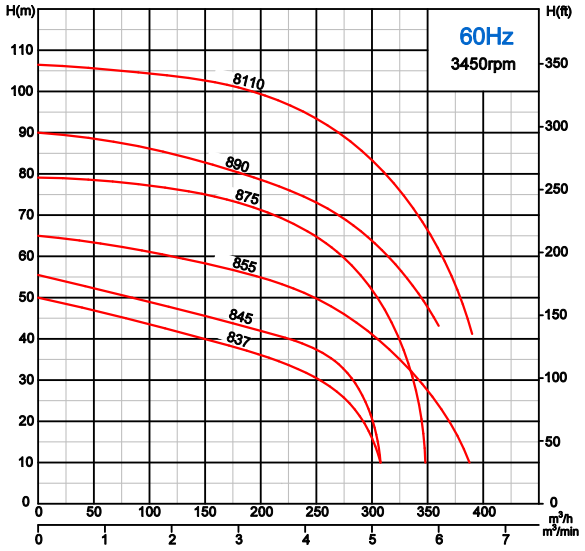- **Starting Method: Star-Delta**