AQUARIS
MADE IN ITALY

SP SERIES

Stainless steel submersible pumps

4 – 10 inch wells | 50 Hz | n ≈ 2850 /min | 23 series | 325 models



4 in

4SP3 · 4SP5 · 4SP8
4SP10 · 4SP14

Q max **18 m³/h**
H max **378 m**
P2 **0.37 – 7.5 kW**



5 in

5SP10 · 5SP15 · 5SP20
5SP25 · 5SP30

Q max **40 m³/h**
H max **330 m**
P2 **1.5 – 15 kW**



6 in

6SP10 · 6SP18 · 6SP20
6SP30 · 6SP36 · 6SP46
6SP60

Q max **65 m³/h**
H max **638 m**
P2 **1.5 – 37 kW**



8 in

8SP77 · 8SP95 · 8SP120

Q max **150 m³/h**
H max **437 m**
P2 **5.5 – 93 kW**



10 in

10SP125 · 10SP135
10SP160

Q max **180 m³/h**
H max **313 m**
P2 **11 – 110 kW**

4 – 10 in	180 m³/h	638 m	0.37 – 110 kW
WELL DIAMETER	MAX. FLOW	MAX. HEAD	MOTOR POWER

SP range

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS / 50 Hz

23 series and 325 models for wells from 4 to 10 inches. Choose the series by flow and head, then open the page shown.

WELL in	SERIES	MODELS	MOTOR POWER P2 kW	MAX. FLOW m³/h	MAX. HEAD m	OUTLET in	PAGE
4 in	4SP3	13	0.37 – 4	4	378	1.25	03
	4SP5	15	0.37 – 5.5	6	357	1.25	04
	4SP8	19	0.75 – 7.5	10	278	1.5	05 – 06
	4SP10	12	1.1 – 7.5	14.4	198	1.5	07
	4SP14	15	1.1 – 7.5	18	177	2	08
5 in	5SP10	10	1.5 – 15	20	330	2.5	09
	5SP15	9	2.2 – 15	25	275	2.5	10
	5SP20	9	2.2 – 15	30	231	2.5	11
	5SP25	10	1.5 – 15	35	220	2.5	12
	5SP30	8	3 – 15	40	176	2.5	13
6 in	6SP10	20	2.2 – 22	18	590	3	14 – 15
	6SP18	21	2.2 – 30	24	638	3	16 – 18
	6SP20	13	1.5 – 26	30	418	3	19 – 20
	6SP30	26	2.2 – 37	40	550	3	21 – 23
	6SP36	21	3 – 37	54	405	3	24 – 26
	6SP46	17	3 – 37	55	317	3	27 – 28
	6SP60	17	4 – 37	65	280	3	29 – 30
8 in	8SP77	18	5.5 – 75	90	437	5	31 – 32
	8SP95	15	5.5 – 93	110	408	5	33 – 34
	8SP120	9	7.5 – 63	150	220	5	35 – 36
10 in	10SP125	8	11 – 93	160	235	5	37 – 38
	10SP135	11	11 – 110	180	313	6	39 – 40
	10SP160	9	13 – 110	180	297	6	41 – 42

4 – 5 INCH SERIES

NEMA standard
Protection grade: IP68
Insulation class: B (4 in), F (5 in)
Liquid temperature: up to 35 °C
Well diameter: 100 / 130 mm
Max. pump diameter: Ø95 / Ø125 mm

6 – 10 INCH SERIES

NEMA dimension standards
Liquid temperature: up to +50 °C
Sand content: max. 0.25%
Direct start (1 cable)
Star-delta start (2 cables)

APPLICATIONS

Water supply from wells or reservoirs
Domestic, civil and industrial use
Garden and farm irrigation
Booster
Lowering underground water level

MODEL CODE

Example
6 SP 20 8-5.5

6	SP	20	8	-	5.5
Well diameter (in)	Series	Capacity (m³/h)	Stages		Motor power (kW)

4SP3

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameter Ø95mm
Highest temperature of liquid: 35°C

MODEL CODE **4 SP 3 18-1.1**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 100mm (4 in)

n ≈ 2850 /min | 50 Hz | Outlet: 1.25 in | 1-phase: 220–240 V (≤ 2.2 kW) | 3-phase: 380–415 V



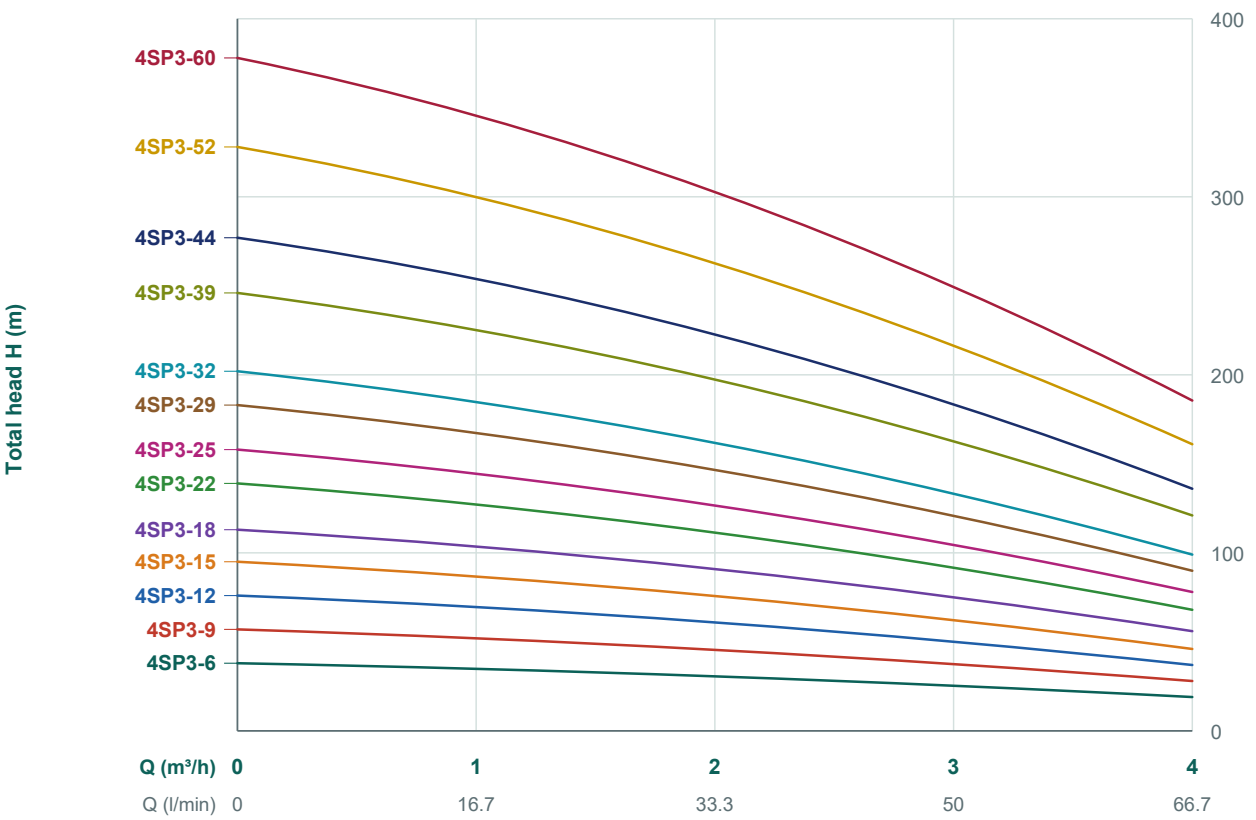

Diffuser height: 21 mm

PERFORMANCE DATA

MODEL		P_2		Q	FLOW / TOTAL HEAD				Length
3-phase	1-phase	kW	HP	m³/h	0	2	3	4	mm
				l/min	0	33.3	50	66.7	
4SP3-6	4SPM3-6	0.37	0.5		38	30	26	19	281
4SP3-9	4SPM3-9	0.55	0.75		57	45	38	28	344
4SP3-12	4SPM3-12	0.75	1		76	60	51	37	407
4SP3-15	4SPM3-15	1.1	1.5		95	74	64	46	470
4SP3-18	4SPM3-18	1.1	1.5		113	89	77	56	533
4SP3-22	4SPM3-22	1.5	2		139	109	94	68	617
4SP3-25	4SPM3-25	1.5	2	H (m)	158	124	107	78	680
4SP3-29	4SPM3-29	1.8	2.5		183	143	124	90	764
4SP3-32	4SPM3-32	2.2	3		202	158	137	99	827
4SP3-39	–	3	4		246	193	167	121	974
4SP3-44	–	3	4		277	218	188	136	1079
4SP3-52	–	3.7	5		328	257	222	161	1247
4SP3-60	–	4	5.5		378	297	256	186	1415

4SP5

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameter Ø95mm
Highest temperature of liquid: 35°C

MODEL CODE 4 SP 5 12-1.1

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 100mm (4 in)

n ≈ 2850 /min | 50 Hz | Outlet: 1.25 in | 1-phase: 220–240 V (≤ 2.2 kW) | 3-phase: 380–415 V



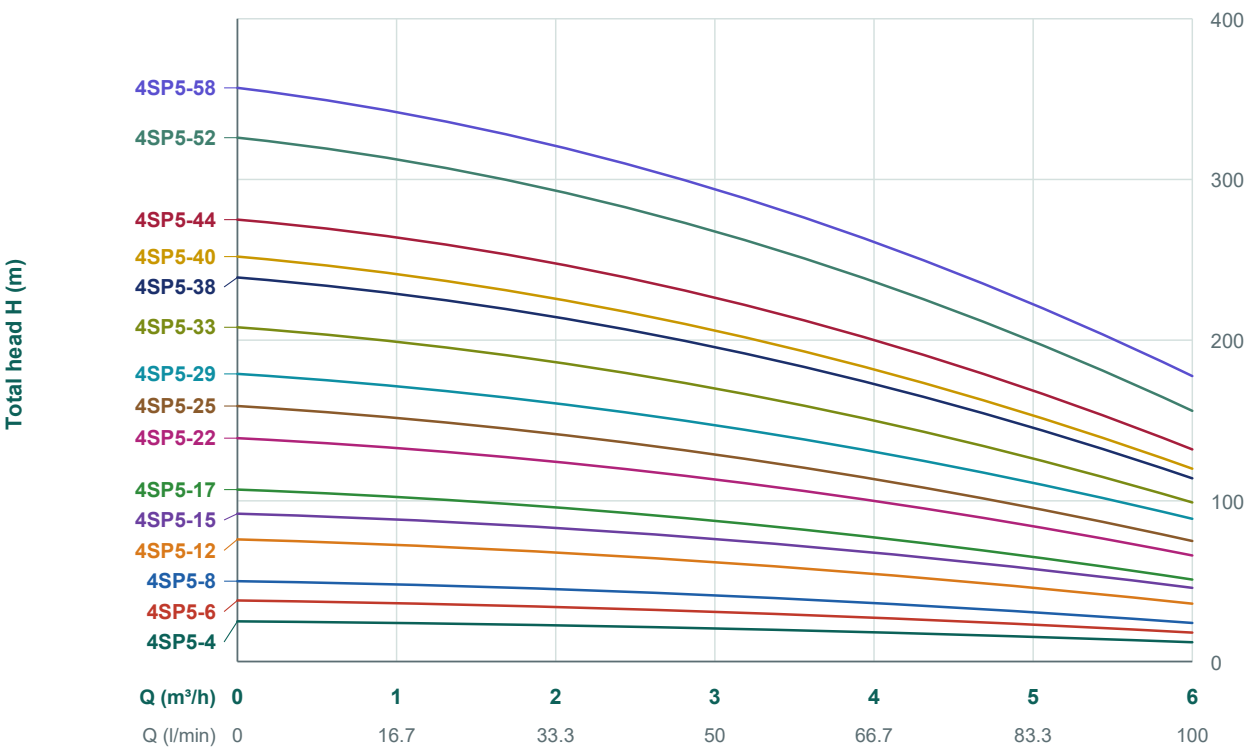

Diffuser height: 21 mm

PERFORMANCE DATA

MODEL		P_2		Q	FLOW / TOTAL HEAD				Length
3-phase	1-phase	kW	HP	m³/h	0	3	5	6	mm
				l/min	0	50	83.3	100	
4SP5-4	4SPM5-4	0.37	0.5		25	20	16	12	239
4SP5-6	4SPM5-6	0.55	0.75		38	30	24	18	281
4SP5-8	4SPM5-8	0.75	1		50	40	32	24	323
4SP5-12	4SPM5-12	1.1	1.5		76	60	48	36	407
4SP5-15	4SPM5-15	1.3	1.75		92	75	58	47	470
4SP5-17	4SPM5-17	1.5	2		107	85	68	51	512
4SP5-22	4SPM5-22	2.2	3		139	110	88	66	617
4SP5-25	4SPM5-25	2.2	3	H (m)	159	125	100	75	680
4SP5-29	–	2.6	3.5		179	145	111	90	764
4SP5-33	–	3	4		208	165	132	99	848
4SP5-38	–	4	5.5		239	190	152	114	953
4SP5-40	–	4	5.5		252	200	160	120	995
4SP5-44	–	4	5.5		275	220	176	132	1079
4SP5-52	–	5.5	7.5		326	260	208	156	1247
4SP5-58	–	5.5	7.5		357	290	222	181	1373

4SP8

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameter Ø95mm
Highest temperature of liquid: 35°C

MODEL CODE **4 SP 8 07-1.1**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 100mm (4 in)

n ≈ 2850 /min | 50 Hz | Outlet: 1.5 in | 1-phase: 220–240 V (≤ 2.2 kW) | 3-phase: 380–415 V



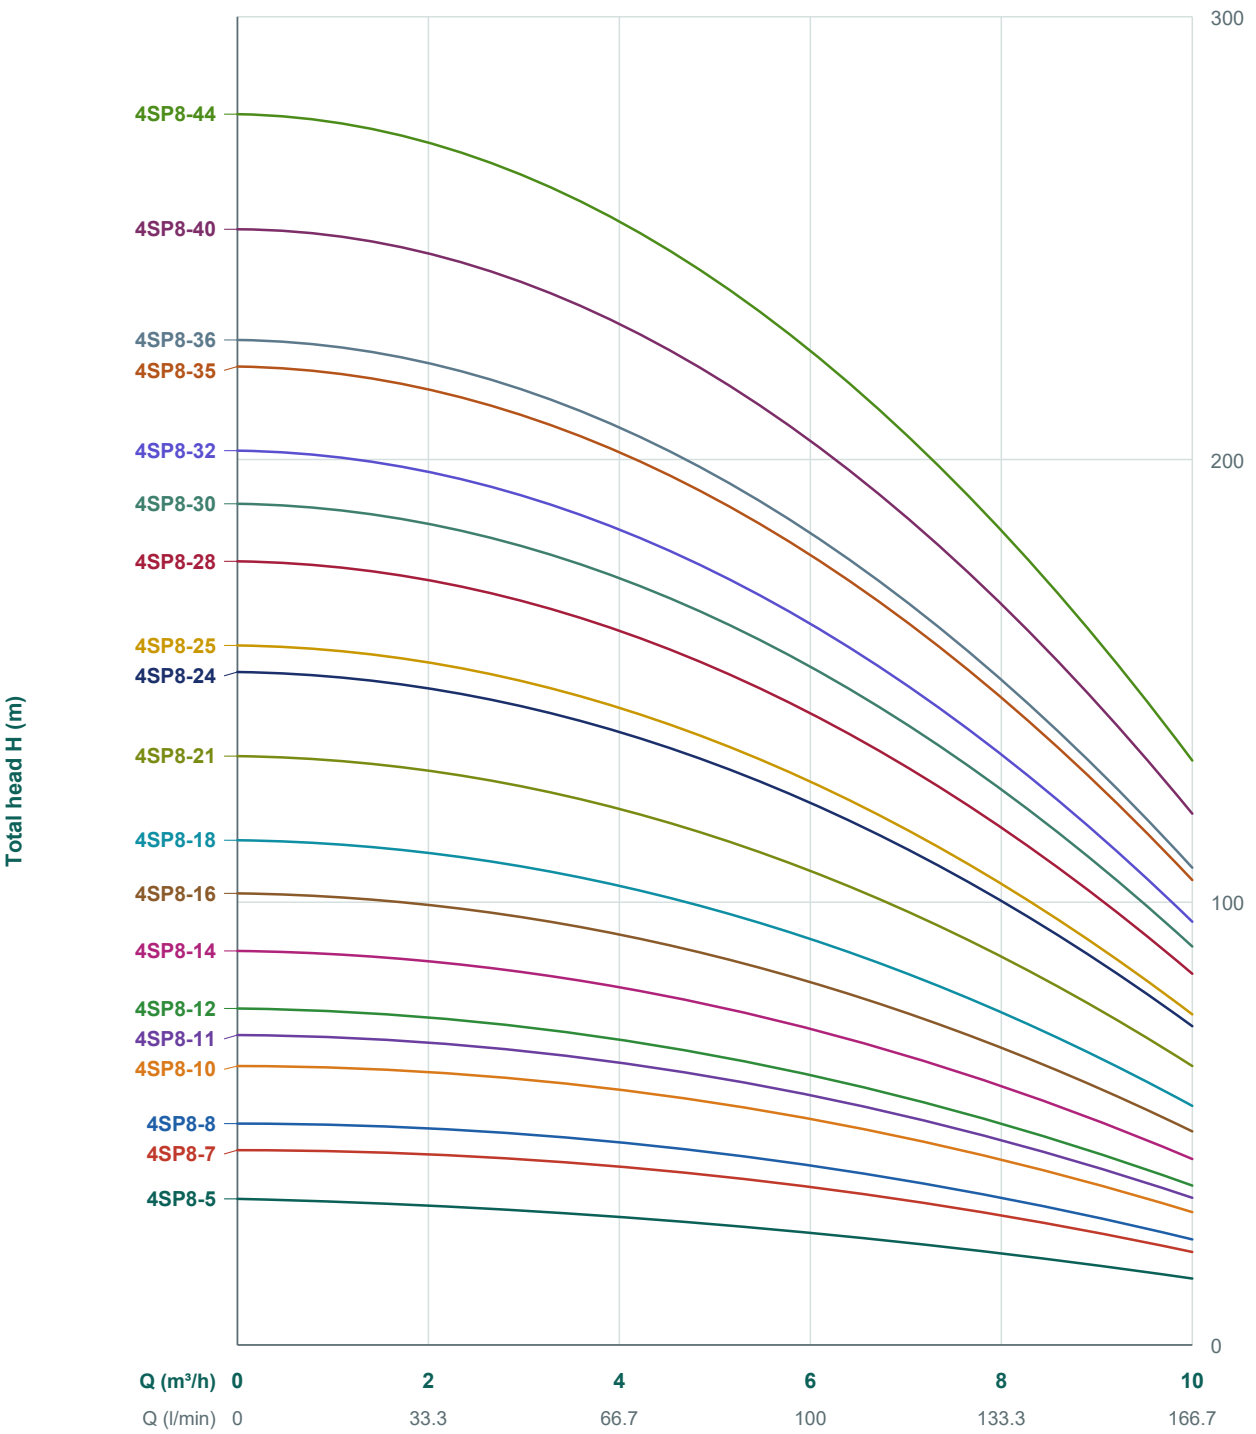

Performance data: next page

4SP8

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 1.5 in | 1-phase: 220–240 V (≤ 2.2 kW) | 3-phase: 380–415 V

Diffuser height: 27.5 mm

PERFORMANCE DATA

MODEL		P_2		Q	FLOW / TOTAL HEAD				Length
3-phase	1-phase	kW	HP	m³/h	0	6	8	10	mm
				l/min	0	100	133.3	166.7	
4SP8-5	4SPM8-5	0.75	1		33	25	21	15	288
4SP8-7	4SPM8-7	1.1	1.5		44	35	30	21	343
4SP8-8	4SPM8-8	1.1	1.5		50	40	34	24	370
4SP8-10	4SPM8-10	1.5	2		63	50	43	30	425
4SP8-11	4SPM8-11	1.5	2		70	55	47	33	452
4SP8-12	4SPM8-12	2.2	3		76	60	51	36	480
4SP8-14	4SPM8-14	2.2	3		89	70	60	42	535
4SP8-16	4SPM8-16	2.2	3		102	80	68	48	590
4SP8-18	–	3	4		114	90	77	54	645
4SP8-21	–	4	5.5	H (m)	133	105	90	63	728
4SP8-24	–	4	5.5		152	120	103	72	810
4SP8-25	–	4	5.5		158	125	107	75	837
4SP8-28	–	4	5.5		177	140	120	84	920
4SP8-30	–	5.5	7.5		190	150	129	90	975
4SP8-32	–	5.5	7.5		202	160	137	96	1030
4SP8-35	–	5.5	7.5		221	175	150	105	1113
4SP8-36	–	5.5	7.5		227	180	154	108	1140
4SP8-40	–	7.5	10		252	200	172	120	1250
4SP8-44	–	7.5	10		278	220	189	132	1360

4SP10

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameter Ø95mm
Highest temperature of liquid: 35°C

MODEL CODE **4 SP 10 05-1.1**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 100mm (4 in)

n ≈ 2850 /min | 50 Hz | Outlet: 1.5 in | 1-phase: 220–240 V (≤ 2.2 kW) | 3-phase: 380–415 V



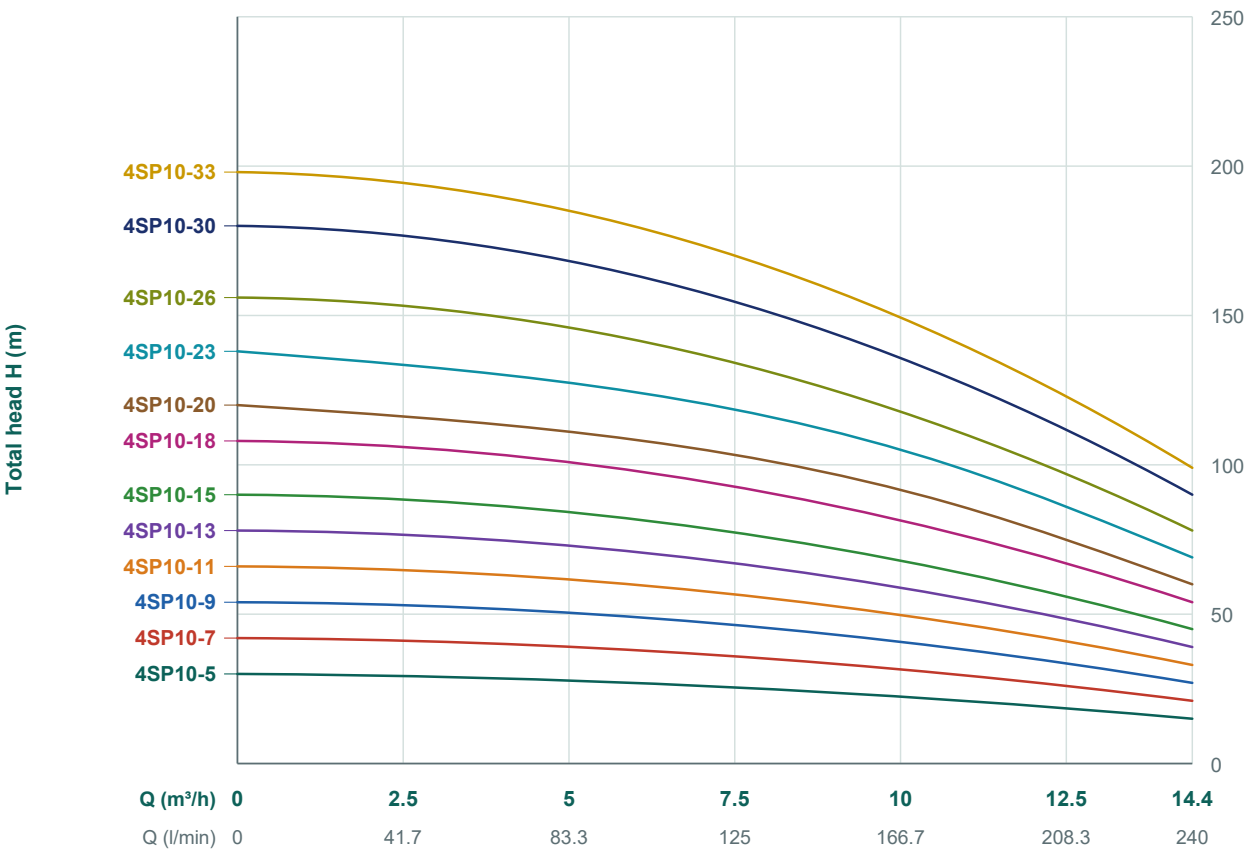

Diffuser height: 50 mm

PERFORMANCE DATA

MODEL		P_2		Q	FLOW / TOTAL HEAD									Length
3-phase	1-phase	kW	HP	m³/h	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	mm
				l/min	0	30	60	90	120	150	180	210	240	
4SP10-5	4SPM10-5	1.1	1.5		30	29	28	27	26	24	22	19	15	455
4SP10-7	4SPM10-7	1.5	2		42	41	39	38	37	34	30	26	21	555
4SP10-9	4SPM10-9	1.8	2.5		54	52	51	49	47	44	39	34	27	655
4SP10-11	4SPM10-11	2.2	3		66	64	62	60	58	54	47	41	33	755
4SP10-13	–	2.6	3.5		78	76	73	71	69	63	56	49	39	855
4SP10-15	–	3	4	H (m)	90	87	85	82	79	73	65	56	45	955
4SP10-18	–	4	5.5		108	105	101	98	95	88	77	68	54	1105
4SP10-20	–	4	5.5		120	116	113	109	105	98	86	75	60	1205
4SP10-23	–	5.5	7.5		138	134	130	125	121	112	99	86	69	1355
4SP10-26	–	5.5	7.5		156	151	147	142	137	127	112	98	78	1505
4SP10-30	–	7.5	10		180	175	169	164	158	146	129	113	90	1705
4SP10-33	–	7.5	10		198	192	186	180	174	161	142	124	99	1855

4SP14

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameter Ø95mm
Highest temperature of liquid: 35°C

MODEL CODE **4 SP 14 07-2.2**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 100mm (4 in)

n ≈ 2850 /min | 50 Hz | Outlet: 2 in | 1-phase: 220–240 V (≤ 2.2 kW) | 3-phase: 380–415 V



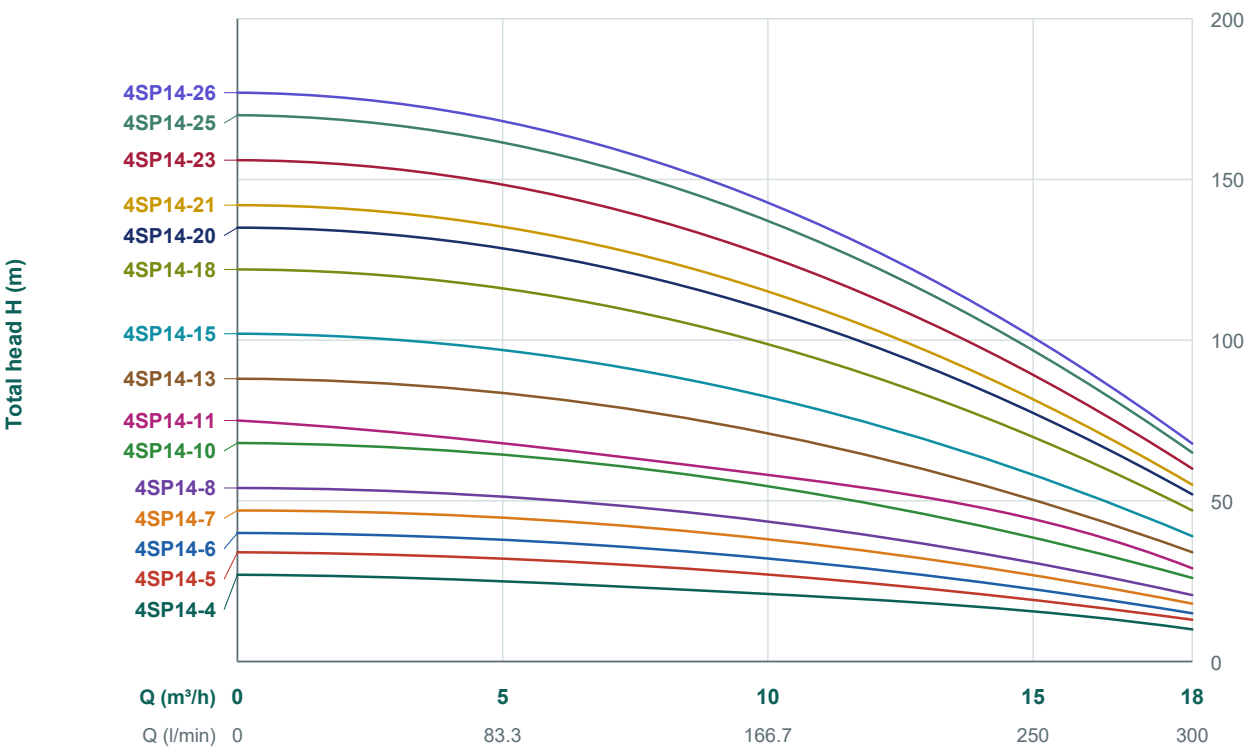

Diffuser height: 50 mm

PERFORMANCE DATA

MODEL		P_2		Q	FLOW / TOTAL HEAD						Length
3-phase	1-phase	kW	HP	m³/h	0	5	10	14	16	18	mm
				l/min	0	83.3	166.7	233.3	266.7	300	
4SP14-4	4SPM14-4	1.1	1.5		27	25	21	17	14	10	365
4SP14-5	4SPM14-5	1.5	2		34	31	26	22	18	13	415
4SP14-6	4SPM14-6	1.5	2		40	38	32	26	21	15	465
4SP14-7	4SPM14-7	2.2	3		47	44	37	31	25	18	515
4SP14-8	4SPM14-8	2.2	3		54	50	42	35	29	21	565
4SP14-10	–	3	4		68	62	53	44	36	26	665
4SP14-11	–	3	4		75	68	58	48	40	29	715
4SP14-13	–	4	5.5	H (m)	88	81	69	57	47	34	815
4SP14-15	–	5.5	7.5		102	94	80	66	54	39	915
4SP14-18	–	5.5	7.5		122	113	96	79	65	47	1065
4SP14-20	–	5.5	7.5		135	125	107	88	72	52	1165
4SP14-21	–	7.5	10		142	131	112	93	76	55	1215
4SP14-23	–	7.5	10		156	144	123	101	83	60	1315
4SP14-25	–	7.5	10		170	157	133	110	90	65	1415
4SP14-26	–	7.5	10		177	163	138	114	94	68	1465

5SP10

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameter Ø125mm
Highest temperature of liquid: 35°C

MODEL CODE 5 SP 10 8-04

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 130mm (5 in)

n ≈ 2850 /min | 50 Hz | Outlet: 2.5 in



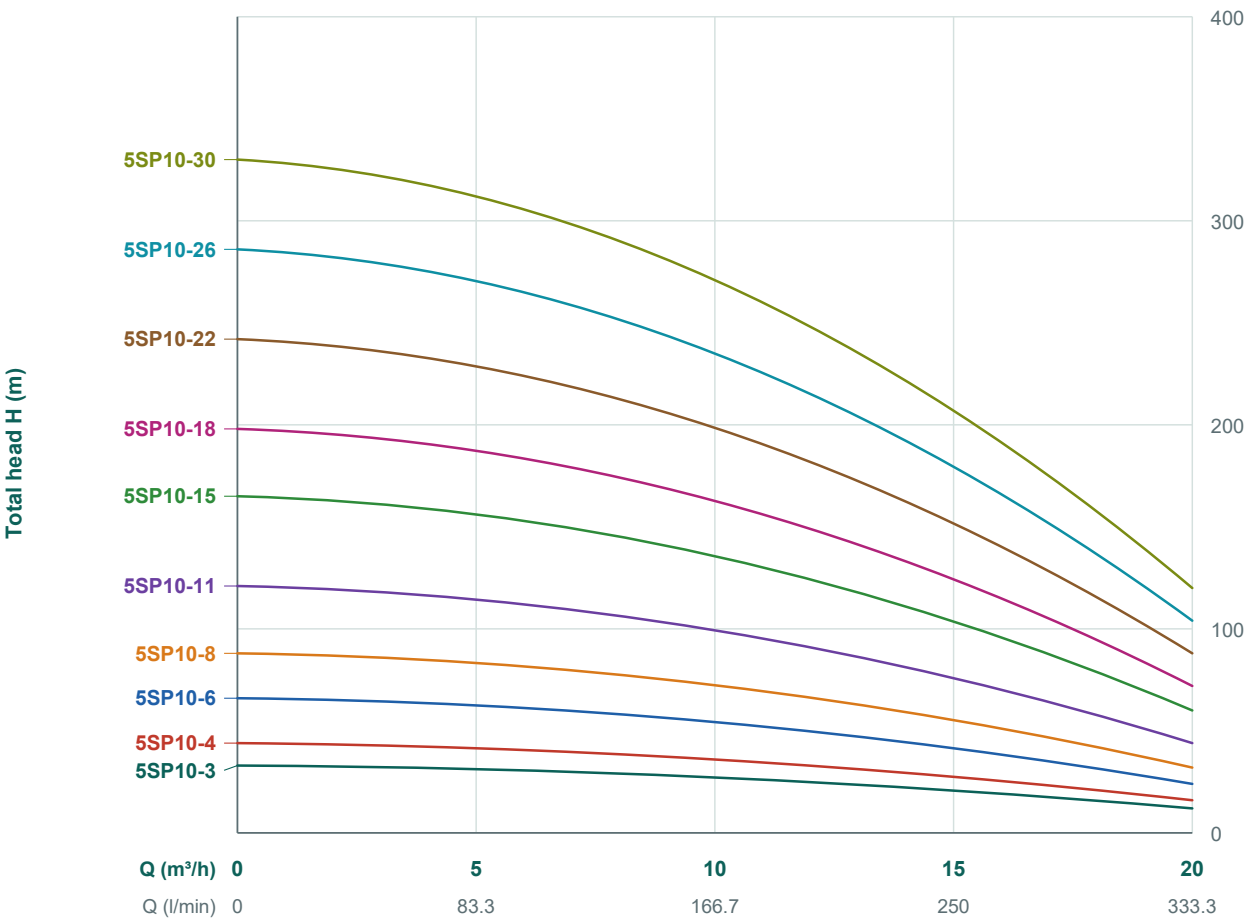

Diffuser height: 48 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD							Length
	kW	HP	m³/h	0	5	8	10	12	15	20	mm
			l/min	0	83.3	133.3	166.7	200	250	333.3	
5SP10-3	1.5	2		33	31	29	27	25	21	12	362
5SP10-4	2.2	3		44	41	38	36	33	28	16	410
5SP10-6	3	4		66	62	58	55	49	42	24	506
5SP10-8	4	5.5		88	82	77	73	66	56	32	602
5SP10-11	5.5	7.5		121	113	106	100	90	77	44	746
5SP10-15	7.5	10	H (m)	165	155	144	137	123	105	60	938
5SP10-18	9.2	12.5		198	185	173	164	148	126	72	1082
5SP10-22	11	15		242	227	211	200	180	154	88	1274
5SP10-26	13	17.5		286	268	250	237	213	182	104	1466
5SP10-30	15	20		330	309	288	273	246	210	120	1658

5SP15

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameter Ø125mm
Highest temperature of liquid: 35°C

MODEL CODE 5 SP 15 7-4

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 130mm (5 in)

n ≈ 2850 /min | 50 Hz | Outlet: 2.5 in



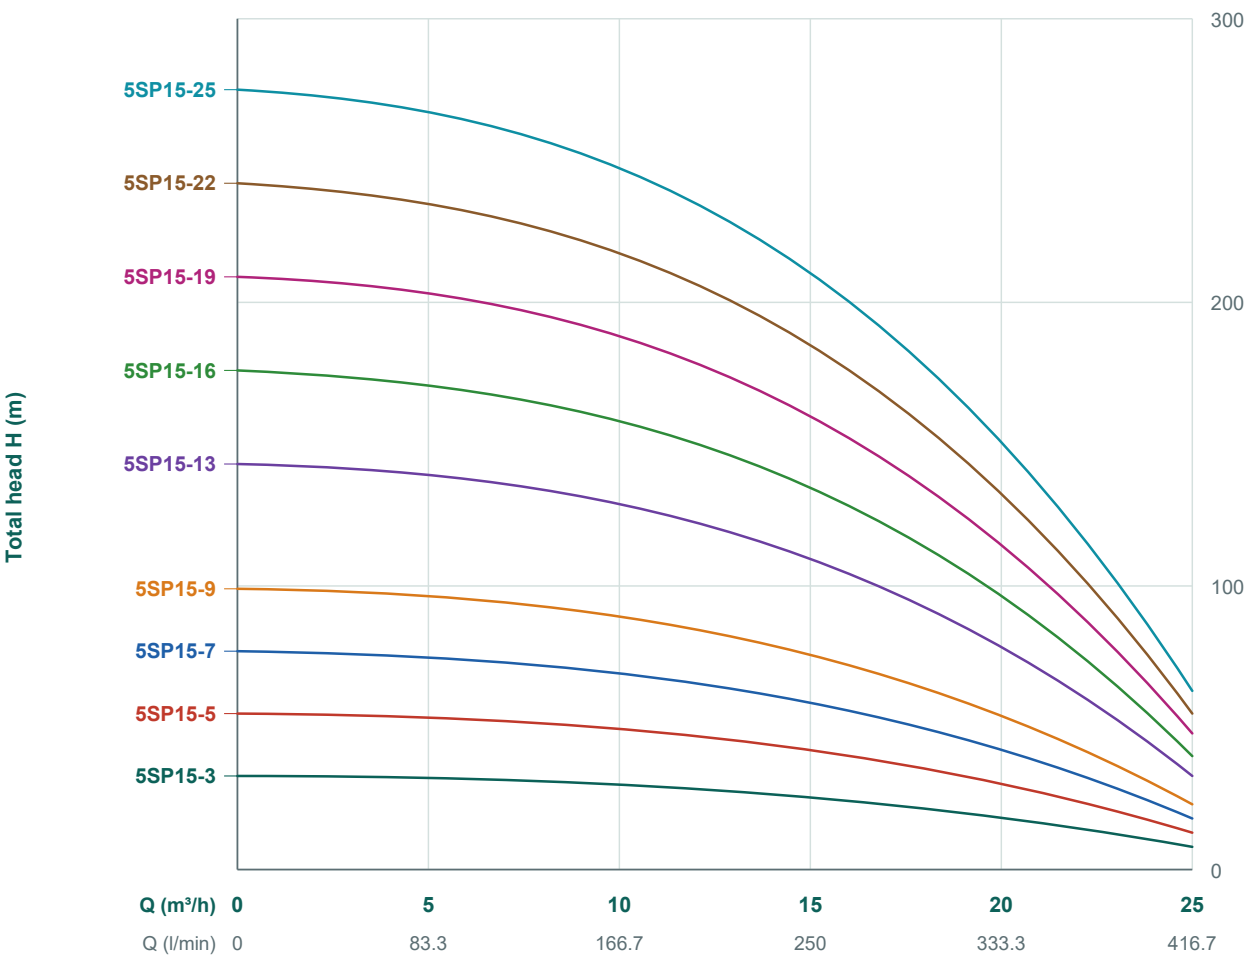

Diffuser height: 48 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD							Length
	kW	HP	m³/h	0	10	12	15	17	20	25	mm
			l/min	0	166.7	200	250	283.3	333.3	416.7	
5SP15-3	2.2	3		33	30	28	26	23	18	8	362
5SP15-5	3	4		55	50	46	43	38	30	13	458
5SP15-7	4	5.5		77	70	64	60	53	42	18	554
5SP15-9	5.5	7.5		99	90	83	77	68	54	23	650
5SP15-13	7.5	10	H (m)	143	130	120	111	99	78	33	842
5SP15-16	9.2	12.5		176	160	147	136	122	96	40	986
5SP15-19	11	15		209	190	175	162	144	114	48	1130
5SP15-22	13	17.5		242	220	202	187	167	132	55	1274
5SP15-25	15	20		275	250	230	213	190	150	63	1418

5SP20

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameter Ø125mm
Highest temperature of liquid: 35°C

MODEL CODE **5 SP 20 6-4**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 130mm (5 in)

n ≈ 2850 /min | 50 Hz | Outlet: 2.5 in



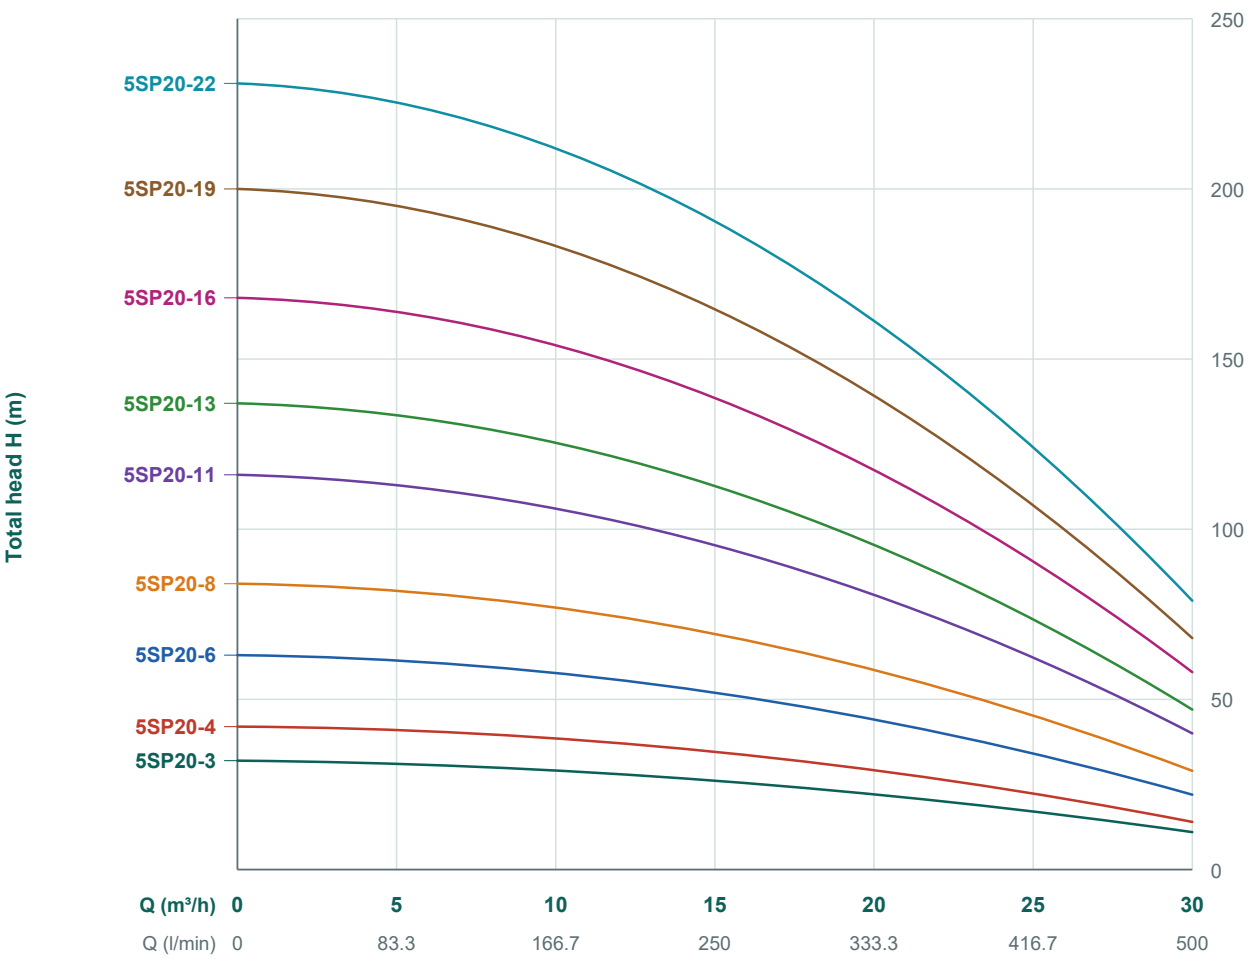

Diffuser height: 56 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD						Length
	kW	HP	m³/h	0	10	15	20	25	30	mm
			l/min	0	166.7	250	333.3	416.7	500	
5SP20-3	2.2	3		32	28	26	23	17	11	396
5SP20-4	3	4		42	37	34	30	23	14	452
5SP20-6	4	5.5		63	55	52	45	35	22	564
5SP20-8	5.5	7.5		84	74	69	60	46	29	676
5SP20-11	7.5	10	H (m)	116	101	95	83	64	40	844
5SP20-13	9.2	12.5		137	120	112	98	75	47	956
5SP20-16	11	15		168	147	138	120	93	58	1124
5SP20-19	13	17.5		200	175	163	143	110	68	1292
5SP20-22	15	20		231	202	189	165	128	79	1460

5SP25

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameter Ø125mm
Highest temperature of liquid: 35°C

MODEL CODE 5 SP 25 7-5.5

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 130mm (5 in)

n ≈ 2850 /min | 50 Hz | Outlet: 2.5 in



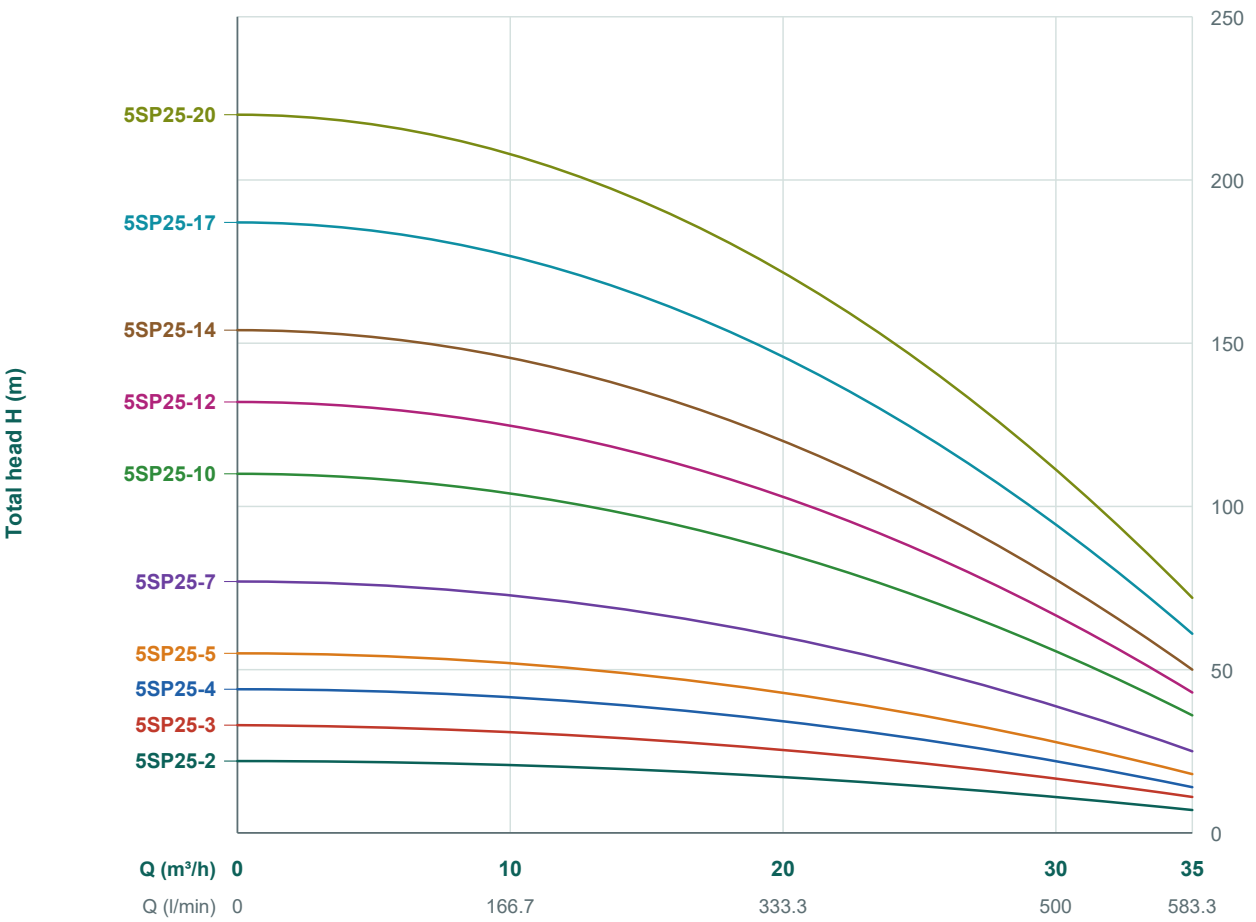

Diffuser height: 56 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD						Length
	kW	HP	m³/h	0	15	20	25	30	35	mm
			l/min	0	250	333.3	416.7	500	583.3	
5SP25-2	1.5	2		22	19	18	15	11	7	340
5SP25-3	2.2	3		33	28	26	22	16	11	396
5SP25-4	3	4		44	37	35	30	22	14	452
5SP25-5	4	5.5		55	47	44	37	27	18	508
5SP25-7	5.5	7.5	H (m)	77	65	62	52	38	25	620
5SP25-10	7.5	10		110	93	88	75	54	36	788
5SP25-12	9.2	12.5		132	112	106	90	65	43	900
5SP25-14	11	15		154	130	123	105	76	50	1012
5SP25-17	13	17.5		187	158	150	127	92	61	1180
5SP25-20	15	20		220	186	176	150	108	72	1348

5SP30

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

APPLICATIONS

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

PUMP / MOTOR


Adopted the NEMA standard
Insulation class: F
Protection grade: IP68
Maximum diameter Ø125mm
Highest temperature of liquid: 35°C

MODEL CODE **5 SP 30 8-7.5**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 130mm (5 in)

n ≈ 2850 /min | 50 Hz | Outlet: 2.5 in



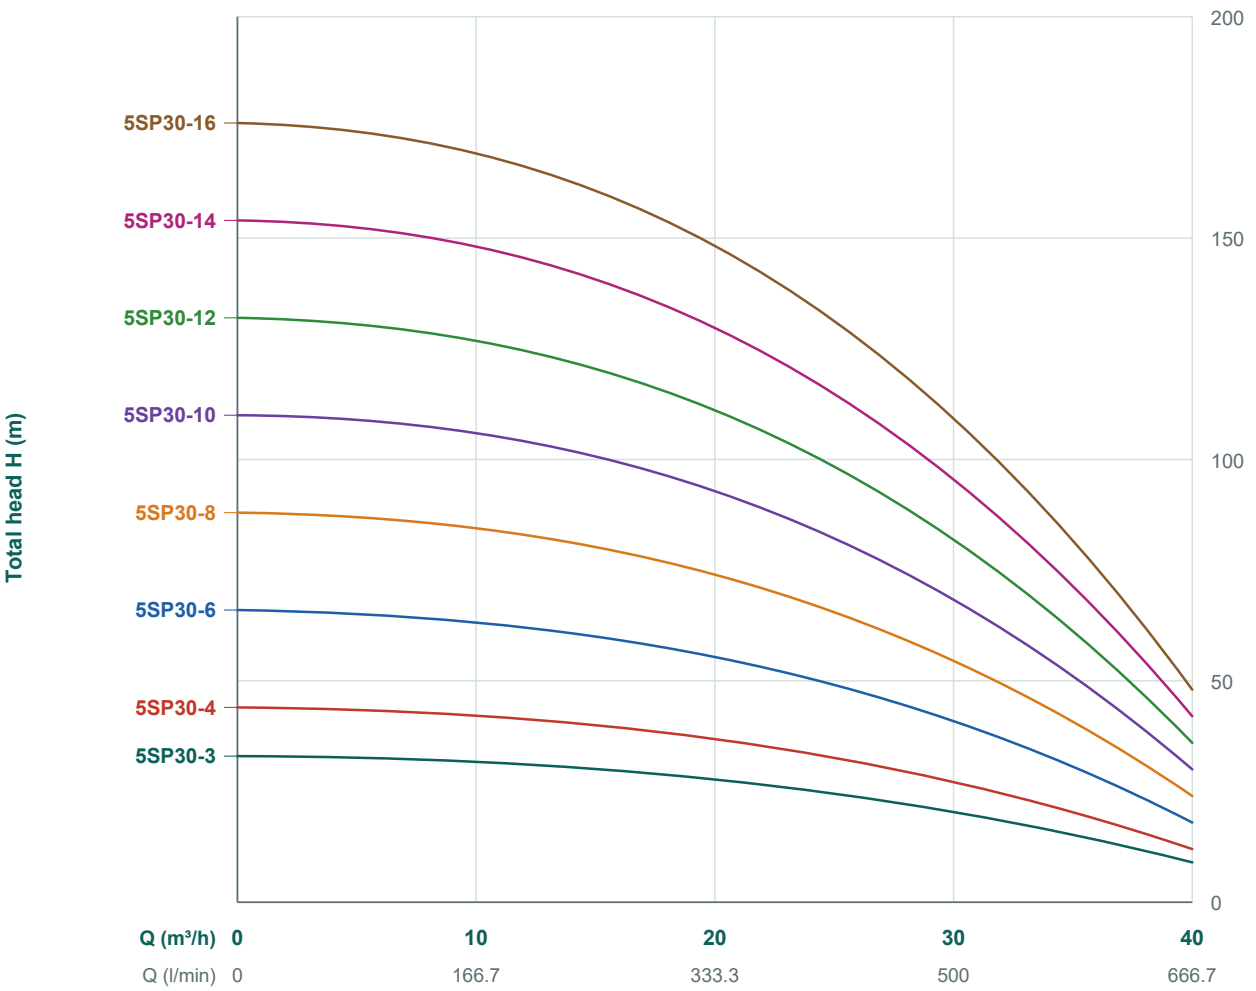

Diffuser height: 56 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD							Length
	kW	HP	m³/h	0	15	20	25	30	35	40	mm
			l/min	0	250	333.3	416.7	500	583.3	666.7	
5SP30-3	3	4		33	30	28	24	21	15	9	396
5SP30-4	4	5.5		44	40	37	32	28	20	12	452
5SP30-6	5.5	7.5		66	60	55	49	42	30	18	564
5SP30-8	7.5	10	H (m)	88	80	74	65	56	40	24	676
5SP30-10	9.2	12.5		110	100	93	82	70	50	30	788
5SP30-12	11	15		132	120	111	98	84	60	36	900
5SP30-14	13	17.5		154	140	130	114	98	70	42	1012
5SP30-16	15	20		176	160	148	131	112	80	48	1124

6SP10

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø130mm

MODEL CODE **6 SP 10 14-5.5**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 150mm (6 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

6SP10

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

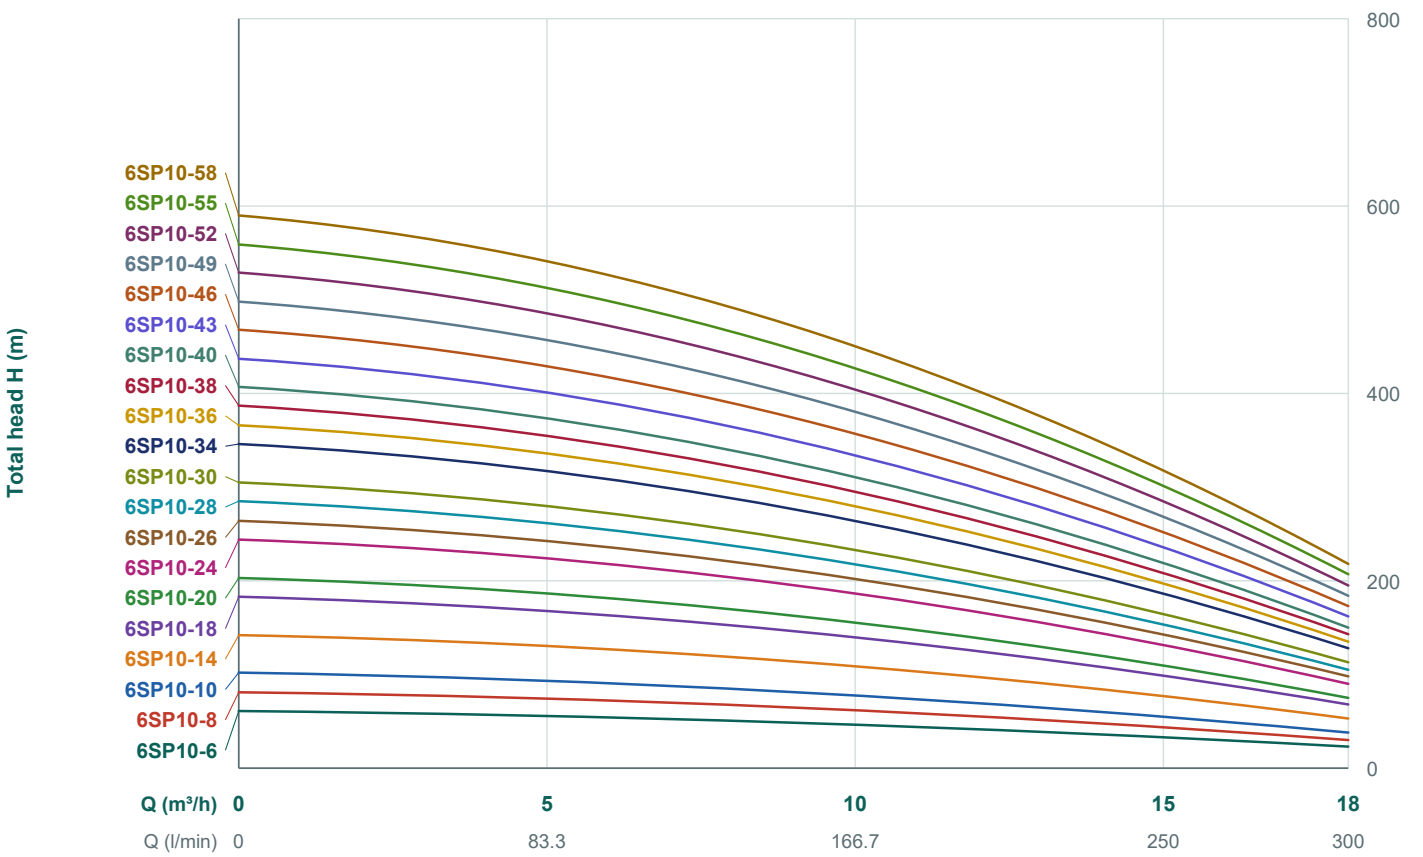

Diffuser height: 55 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD									Length
	kW	HP	m³/h	0	2.4	4.8	7.2	9.6	12	14.4	16.8	18	mm
			l/min	0	40	80	120	160	200	240	280	300	
6SP10-6	2.2	3		61	58	55	52	47	42	35	27	23	602
6SP10-8	3	4		81	78	74	69	63	56	47	36	30	712
6SP10-10	4	5.5		102	97	92	86	79	70	59	46	38	822
6SP10-14	5.5	7.5		142	136	129	121	110	98	83	64	53	1042
6SP10-18	7.5	10		183	175	166	155	142	126	106	82	68	1262
6SP10-20	7.5	10		203	195	184	172	158	140	118	91	75	1372
6SP10-24	9.2	12.5		244	234	221	207	189	168	142	109	90	1592
6SP10-26	9.2	12.5		264	253	240	224	205	182	154	118	98	1702
6SP10-28	11	15		285	273	258	241	221	196	166	127	105	1812
6SP10-30	11	15	H (m)	305	292	277	259	236	209	177	138	113	1922
6SP10-34	13	17.5		346	331	314	293	268	237	201	155	128	2142
6SP10-36	13	17.5		366	351	332	310	284	251	213	164	135	2252
6SP10-38	15	20		387	371	351	328	299	265	225	173	143	2362
6SP10-40	15	20		407	390	369	345	315	279	237	182	150	2472
6SP10-43	18.5	25		437	419	397	371	339	300	254	196	162	2637
6SP10-46	18.5	25		468	448	424	397	362	321	272	209	173	2802
6SP10-49	18.5	25		498	477	452	422	386	342	290	223	184	2967
6SP10-52	22	30		529	507	480	448	410	363	308	237	195	3132
6SP10-55	22	30		559	536	507	474	433	384	325	250	207	3297
6SP10-58	22	30		590	565	535	500	457	405	343	264	218	3462

6SP18

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø130mm

MODEL CODE **6 SP 18 8-5.5**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 150mm (6 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

6SP18

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

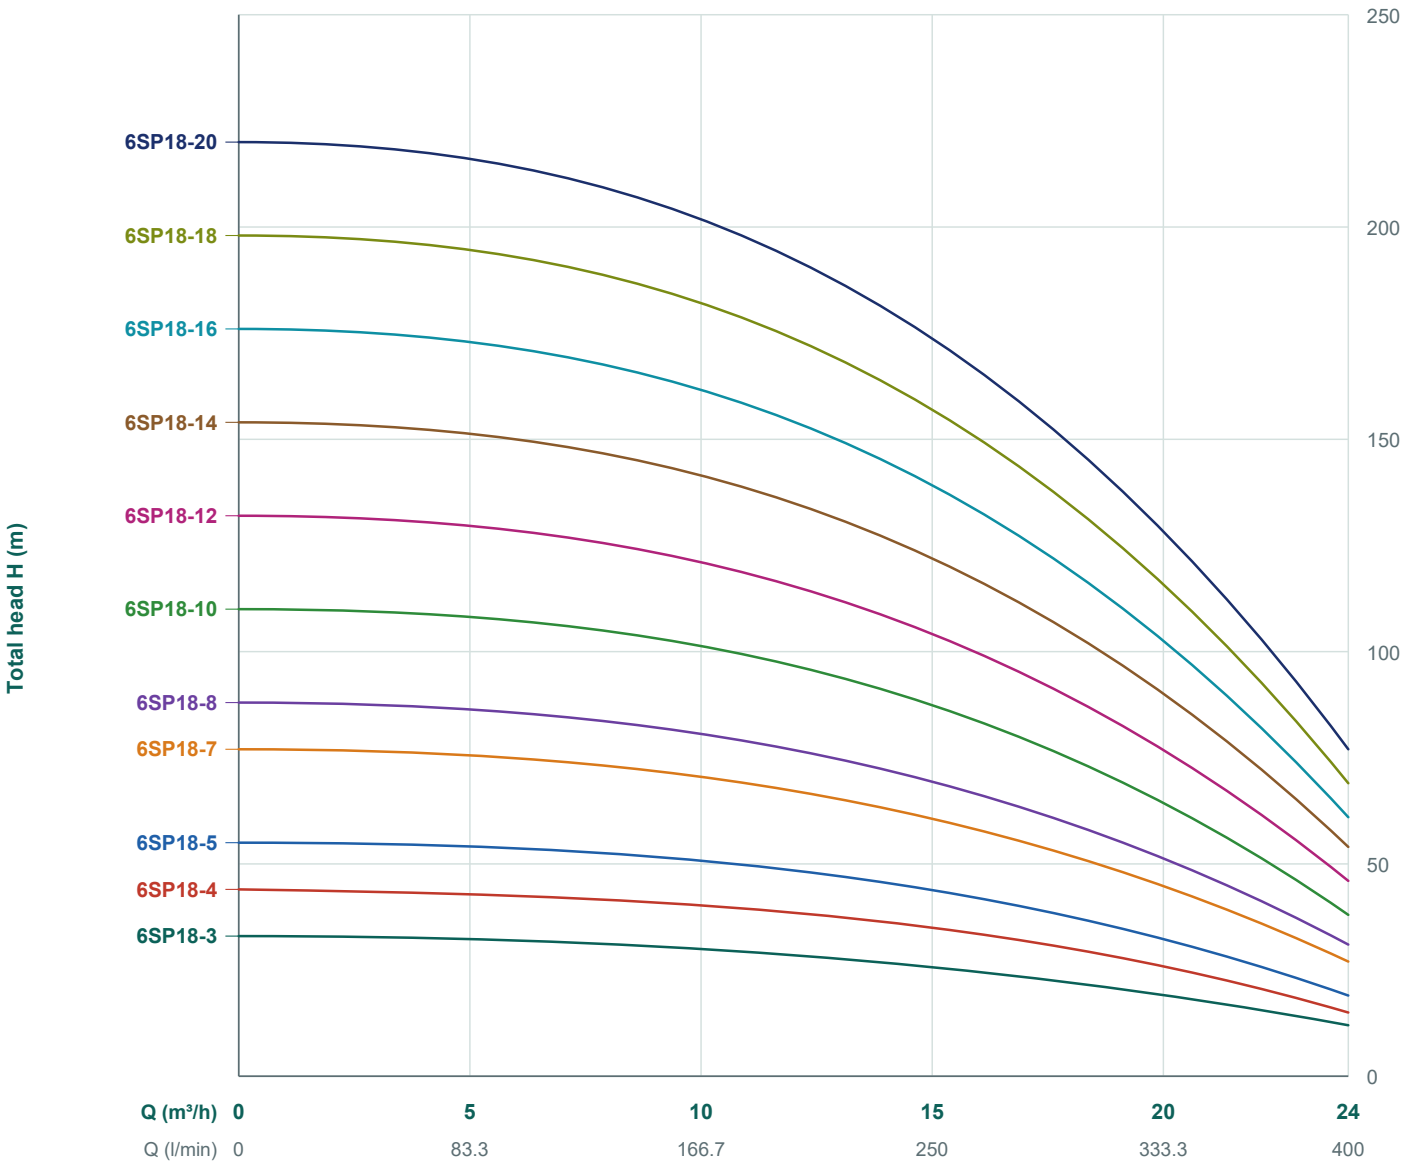

Diffuser height: 55 mm

PERFORMANCE DATA (1/2)


MODEL	P_2		Q	FLOW / TOTAL HEAD									Length
	kW	HP	m³/h	0	3	6	9	12	15	18	21	24	mm
			l/min	0	50	100	150	200	250	300	350	400	
6SP18-3	2.2	3		33	32	31	30	29	26	22	17	12	451
6SP18-4	2.2	3		44	43	42	41	39	35	30	23	15	492
6SP18-5	3	4		55	54	53	52	49	44	37	29	19	547
6SP18-7	4	5.5		77	76	75	73	68	61	52	40	27	656
6SP18-8	5.5	7.5		88	87	86	83	78	70	60	46	31	710
6SP18-10	5.5	7.5	H (m)	110	109	108	104	97	87	75	58	38	822
6SP18-12	7.5	10		132	131	129	125	117	105	90	69	46	932
6SP18-14	7.5	10		154	153	151	146	136	122	105	81	54	1042
6SP18-16	9.2	12.5		176	175	172	167	156	140	120	92	61	1152
6SP18-18	11	15		198	197	194	188	175	157	134	104	69	1262
6SP18-20	11	15		220	219	215	209	195	175	149	115	77	1372

6SP18

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

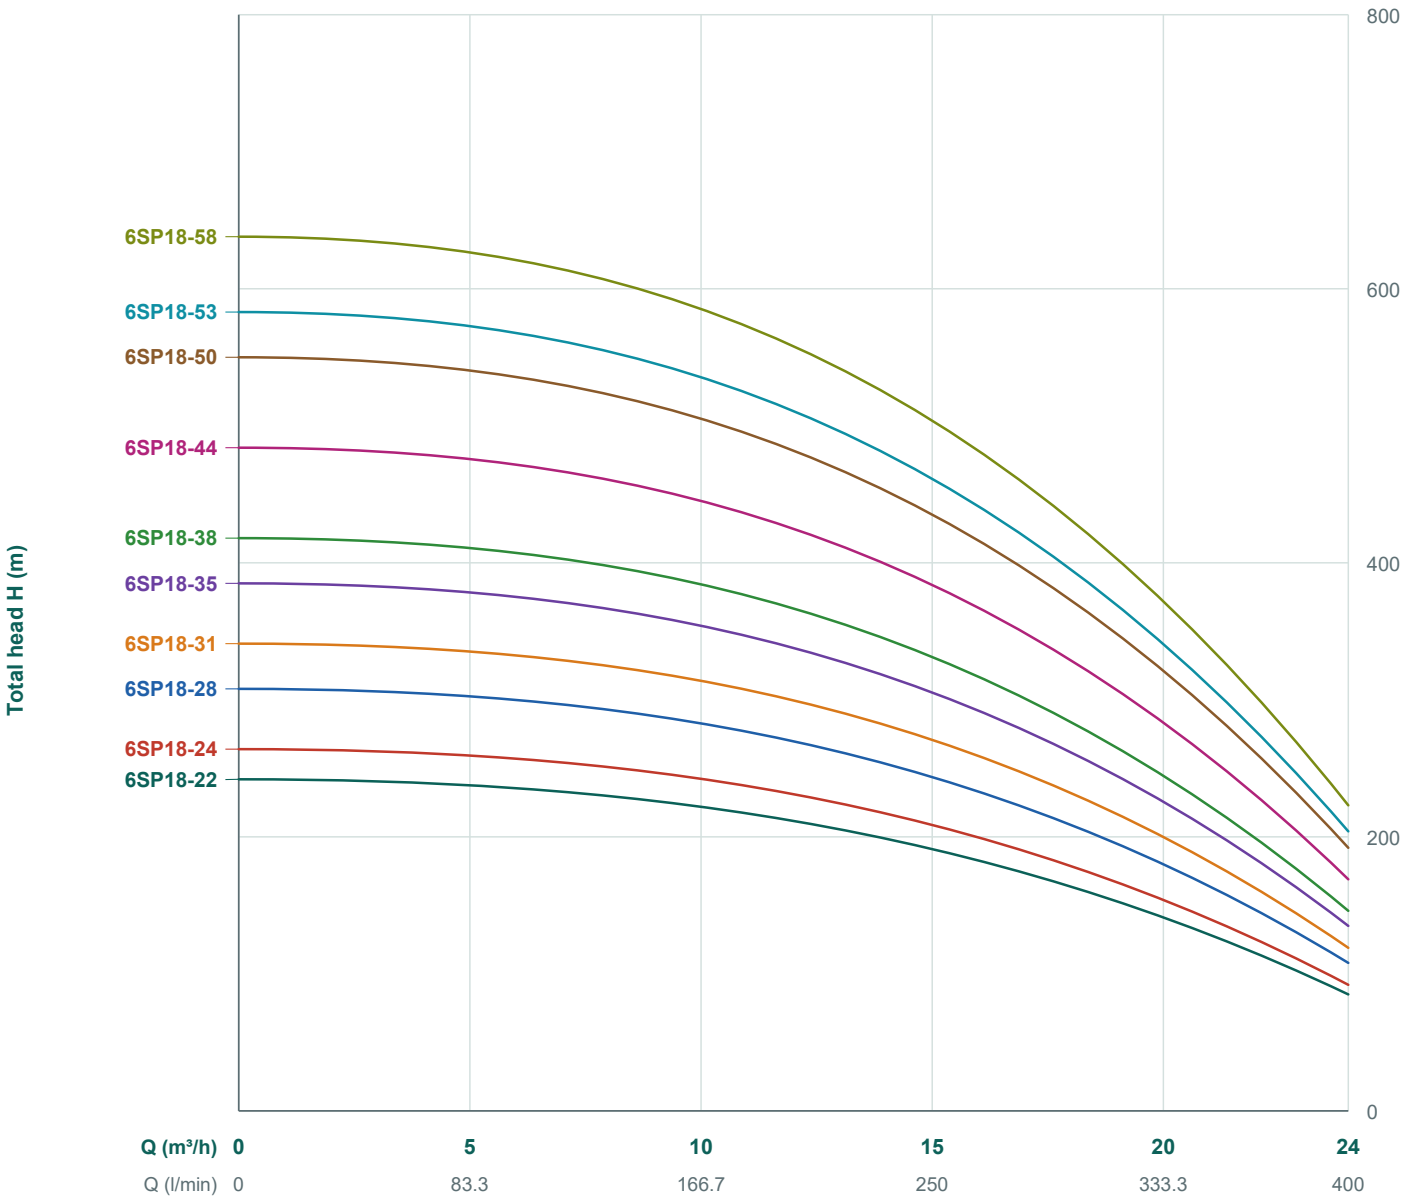

Diffuser height: 55 mm

PERFORMANCE DATA (2/2)

MODEL	P_2		Q	FLOW / TOTAL HEAD									Length
	kW	HP	m³/h	0	3	6	9	12	15	18	21	24	mm
			l/min	0	50	100	150	200	250	300	350	400	
6SP18-22	13	17.5		242	241	237	229	214	192	164	127	85	1482
6SP18-24	13	17.5		264	263	258	250	233	209	179	138	92	1592
6SP18-28	15	20		308	307	301	292	272	244	209	161	108	1812
6SP18-31	18.5	25		341	340	334	323	301	270	232	179	119	1978
6SP18-35	18.5	25	H (m)	385	384	377	365	340	305	261	202	135	2198
6SP18-38	22	30		418	417	409	396	370	332	284	219	146	2363
6SP18-44	26	35		484	482	474	459	428	384	329	254	169	2692
6SP18-50	26	35		550	548	538	522	486	436	374	288	192	3022
6SP18-53	30	40		583	581	571	553	515	462	396	306	204	3186
6SP18-58	30	40		638	636	624	605	564	506	433	334	223	3462

6SP20

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø130mm

MODEL CODE **6 SP 20 8-5.5**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 150mm (6 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

6SP20

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

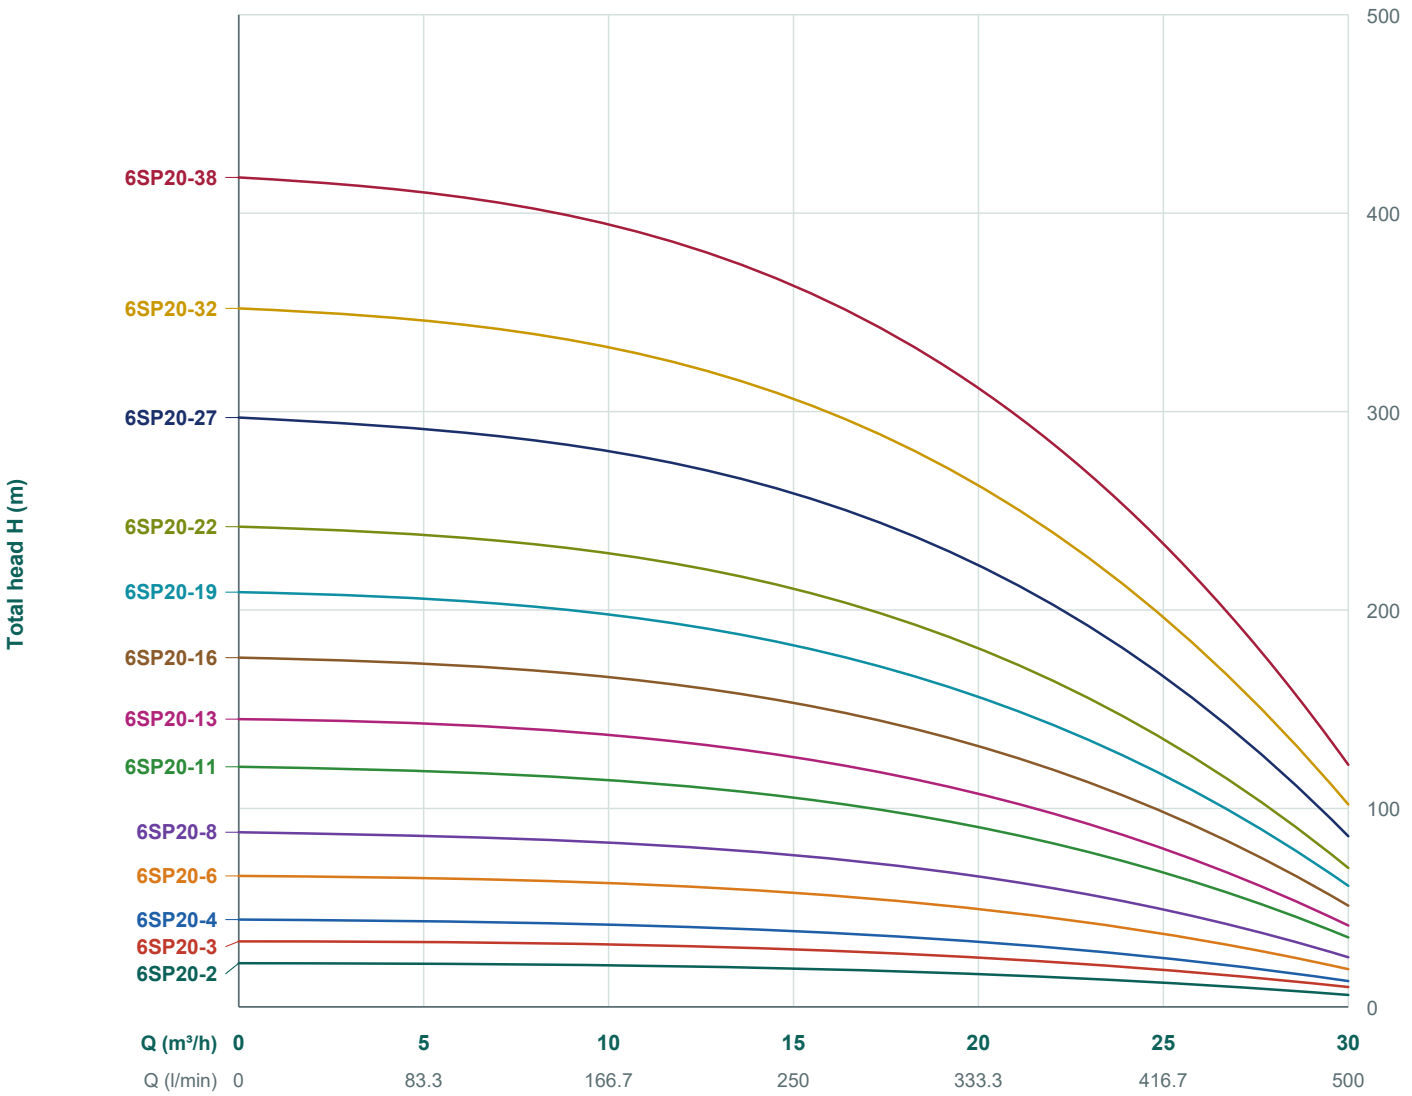

Diffuser height: 45 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD						Length
	kW	HP	m³/h	0	10	15	20	25	30	mm
			l/min	0	166.7	250	333.3	416.7	500	
6SP20-2	1.5	2		22	21	19	17	12	6	361
6SP20-3	2.2	3		33	31	29	26	18	10	406
6SP20-4	3	4		44	41	38	34	24	13	451
6SP20-6	4	5.5		66	62	57	51	36	19	541
6SP20-8	5.5	7.5		88	82	76	68	48	25	631
6SP20-11	7.5	10		121	113	105	94	66	35	766
6SP20-13	9.2	12.5	H (m)	145	136	125	111	78	41	856
6SP20-16	11	15		176	165	152	136	96	51	991
6SP20-19	13	17.5		209	196	181	162	114	61	1126
6SP20-22	15	20		242	227	209	187	132	70	1261
6SP20-27	18.5	25		297	278	257	230	163	86	1486
6SP20-32	22	30		352	330	304	272	192	102	1711
6SP20-38	26	35		418	391	361	323	228	122	1981

6SP30

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø130mm or Ø135mm

MODEL CODE **6 SP 30 12-11**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 150mm (6 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

6SP30

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

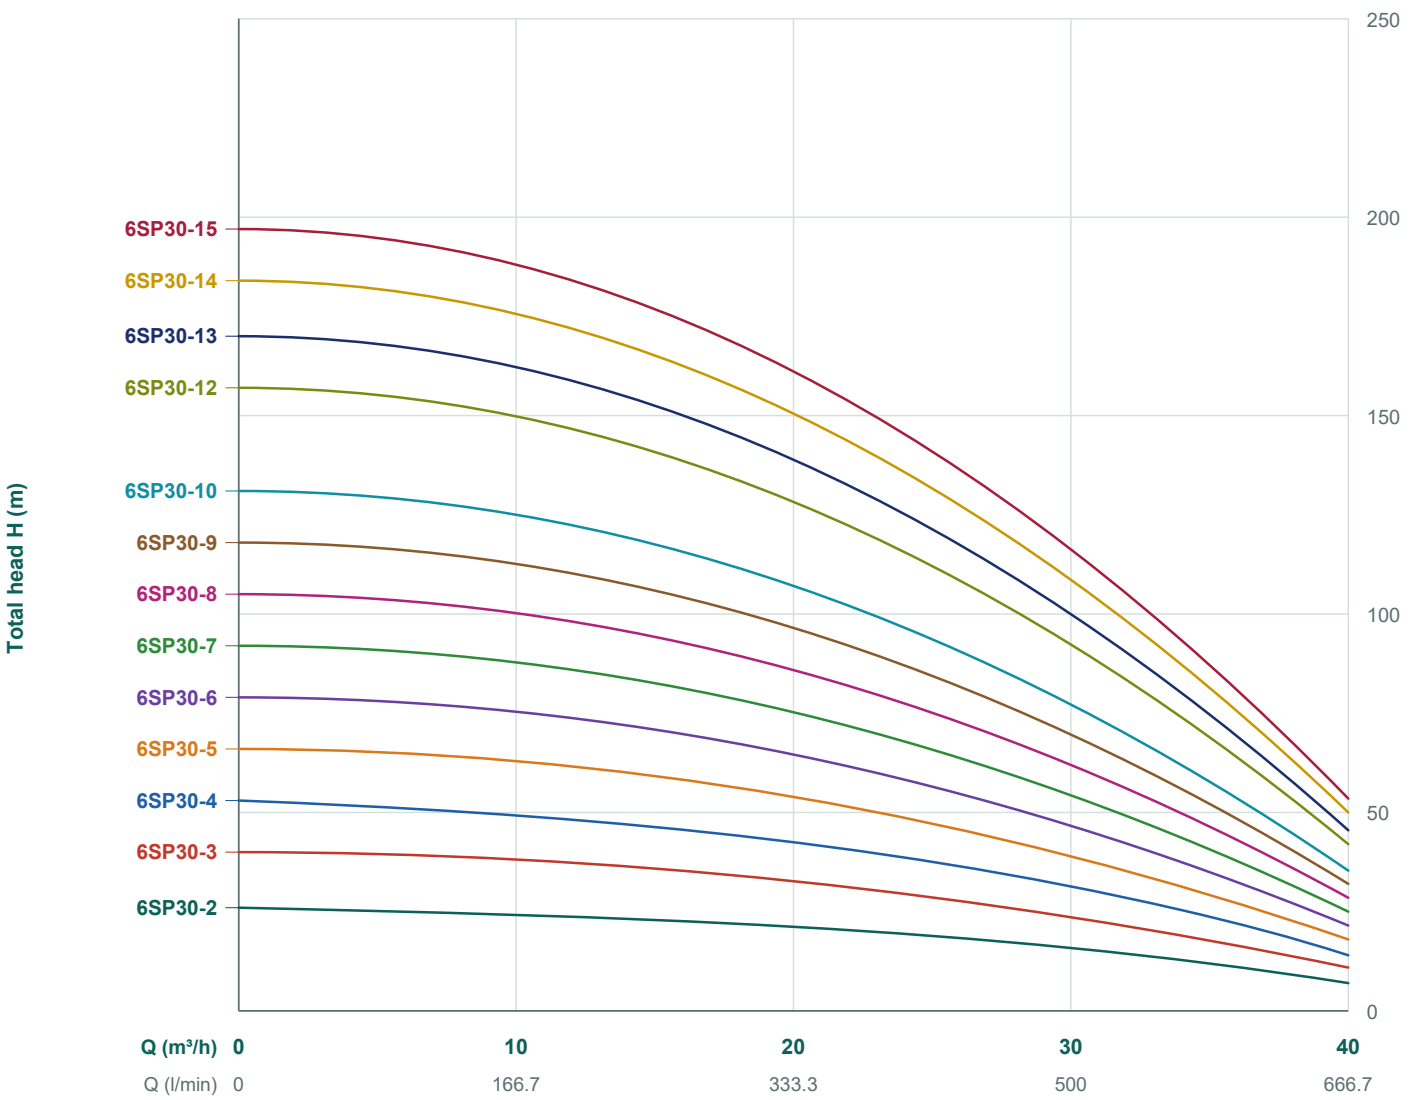

Diffuser height: 96 / 56.5 mm

PERFORMANCE DATA (1/2)


MODEL	P_2		Q	FLOW / TOTAL HEAD						Length1	Length2
	kW	HP	m³/h	0	20	25	30	35	40	mm	mm
			l/min	0	333.3	416.7	500	583.3	666.7		
6SP30-2	2.2	3		26	21	19	16	12	7	463	384
6SP30-3	3	4		40	32	28	23	18	11	559	441
6SP30-4	4	5.5		53	42	38	31	24	14	655	497
6SP30-5	5.5	7.5		66	53	47	39	30	18	751	554
6SP30-6	5.5	7.5		79	64	57	47	36	21	847	610
6SP30-7	7.5	10		92	74	66	55	42	25	943	667
6SP30-8	7.5	10	H (m)	105	85	75	63	48	28	1039	723
6SP30-9	9.2	12.5		118	95	85	71	54	32	1135	780
6SP30-10	9.2	12.5		131	105	94	79	60	35	1231	836
6SP30-12	11	15		157	126	113	94	72	42	1423	949
6SP30-13	11	15		170	137	122	102	78	46	1519	1005
6SP30-14	13	17.5		184	148	132	110	84	50	1615	1062
6SP30-15	13	17.5		197	159	141	118	90	53	1711	1118

6SP30

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

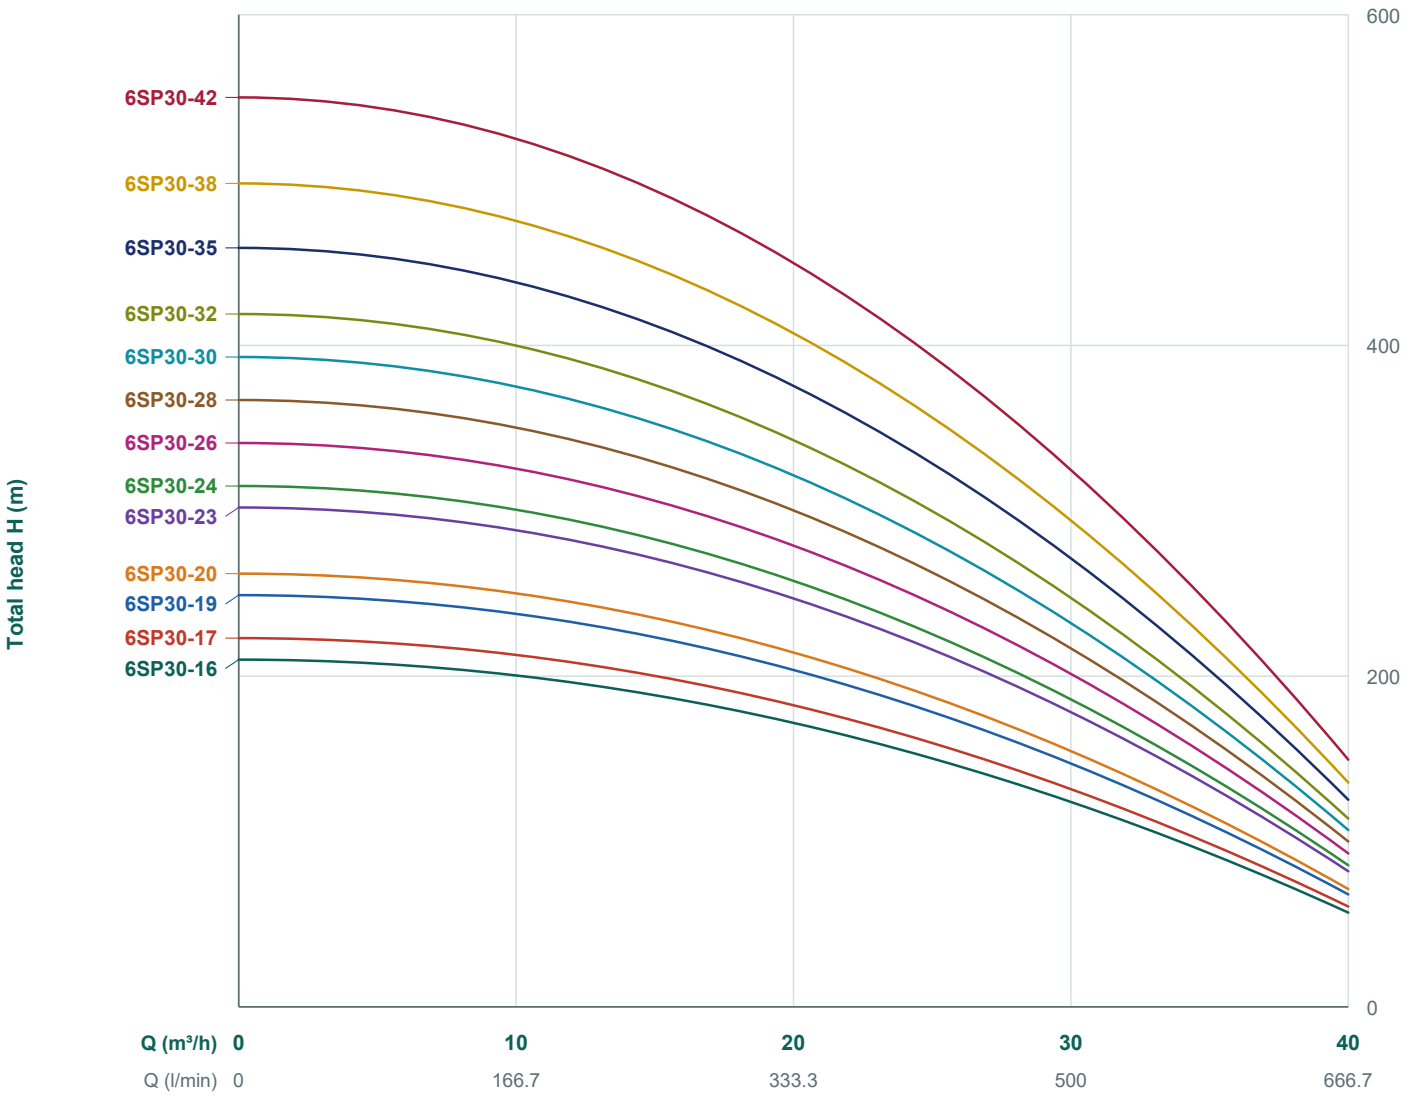

Diffuser height: 96 / 56.5 mm

PERFORMANCE DATA (2/2)

MODEL	P_2		Q	FLOW / TOTAL HEAD						Length1	Length2
	kW	HP	m³/h	0	20	25	30	35	40	mm	mm
			l/min	0	333.3	416.7	500	583.3	666.7		
6SP30-16	15	20		210	169	151	126	96	57	1807	1175
6SP30-17	15	20		223	180	160	134	102	61	1903	1232
6SP30-19	18.5	25		249	201	179	150	114	68	2095	1345
6SP30-20	18.5	25		262	212	188	158	120	71	2191	1401
6SP30-23	22	30		302	243	217	181	138	82	2479	1571
6SP30-24	22	30		315	254	226	189	144	86	2575	1627
6SP30-26	26	35	H (m)	341	275	245	205	156	93	2767	1740
6SP30-28	26	35		367	296	264	221	168	100	2959	1853
6SP30-30	26	35		393	317	283	237	180	107	3151	1966
6SP30-32	30	40		419	338	302	253	192	114	3343	2079
6SP30-35	30	40		459	370	330	276	210	125	3631	2248
6SP30-38	37	50		498	402	358	300	228	136	3919	2417
6SP30-42	37	50		550	444	396	331	252	150	4303	2643

6SP36

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø130mm

MODEL CODE **6 SP 36 4-5.5**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 150mm (6 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

6SP36

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

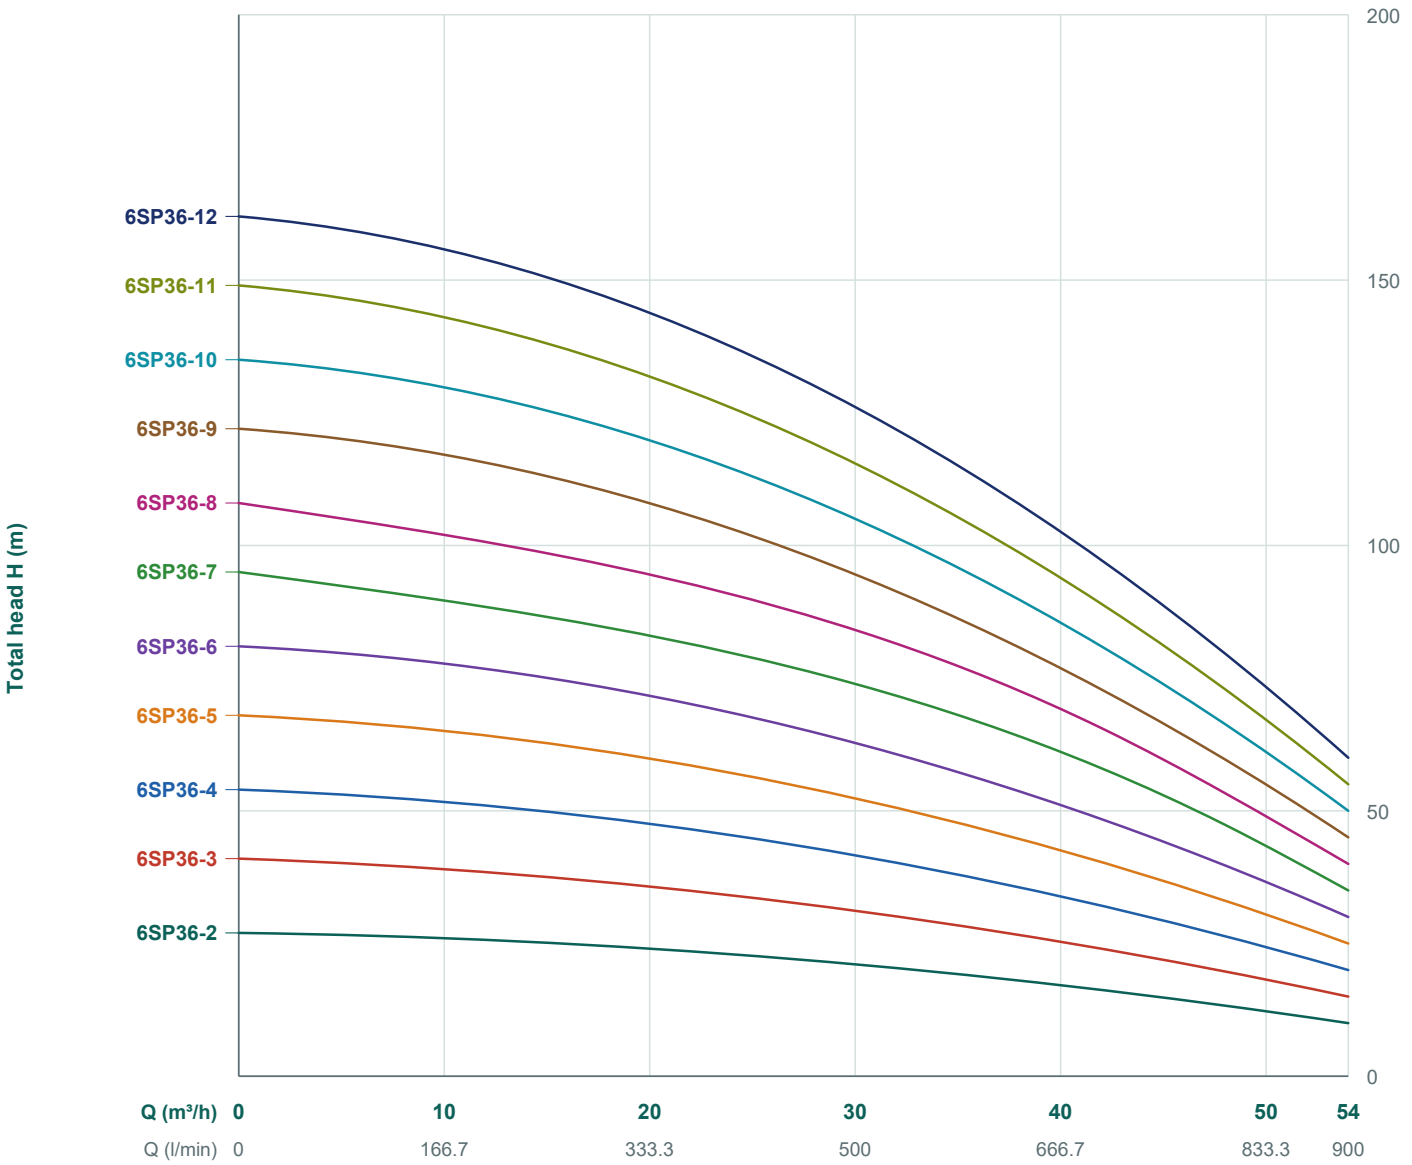

Diffuser height: 96 mm

PERFORMANCE DATA (1/2)


MODEL	P_2		Q	FLOW / TOTAL HEAD										Length
	kW	HP	m³/h	0	6	12	18	24	30	36	42	48	54	mm
			l/min	0	100	200	300	400	500	600	700	800	900	
6SP36-2	3	4		27	26	25	24	23	21	19	16	14	10	464
6SP36-3	4	5.5		41	39	38	36	34	31	28	25	20	15	560
6SP36-4	5.5	7.5		54	53	51	48	45	42	38	33	27	20	656
6SP36-5	7.5	10		68	66	63	60	57	52	47	41	34	25	752
6SP36-6	7.5	10		81	79	76	73	68	62	56	49	41	30	848
6SP36-7	9.2	12.5	H (m)	95	92	89	85	80	73	66	58	48	35	944
6SP36-8	11	15		108	105	102	97	91	83	75	66	54	40	1040
6SP36-9	11	15		122	119	114	109	102	94	85	74	61	45	1136
6SP36-10	13	17.5		135	132	127	121	114	104	94	82	68	50	1232
6SP36-11	15	20		149	145	140	133	125	114	103	91	75	55	1328
6SP36-12	15	20		162	158	152	145	136	125	113	99	82	60	1424

6SP36

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

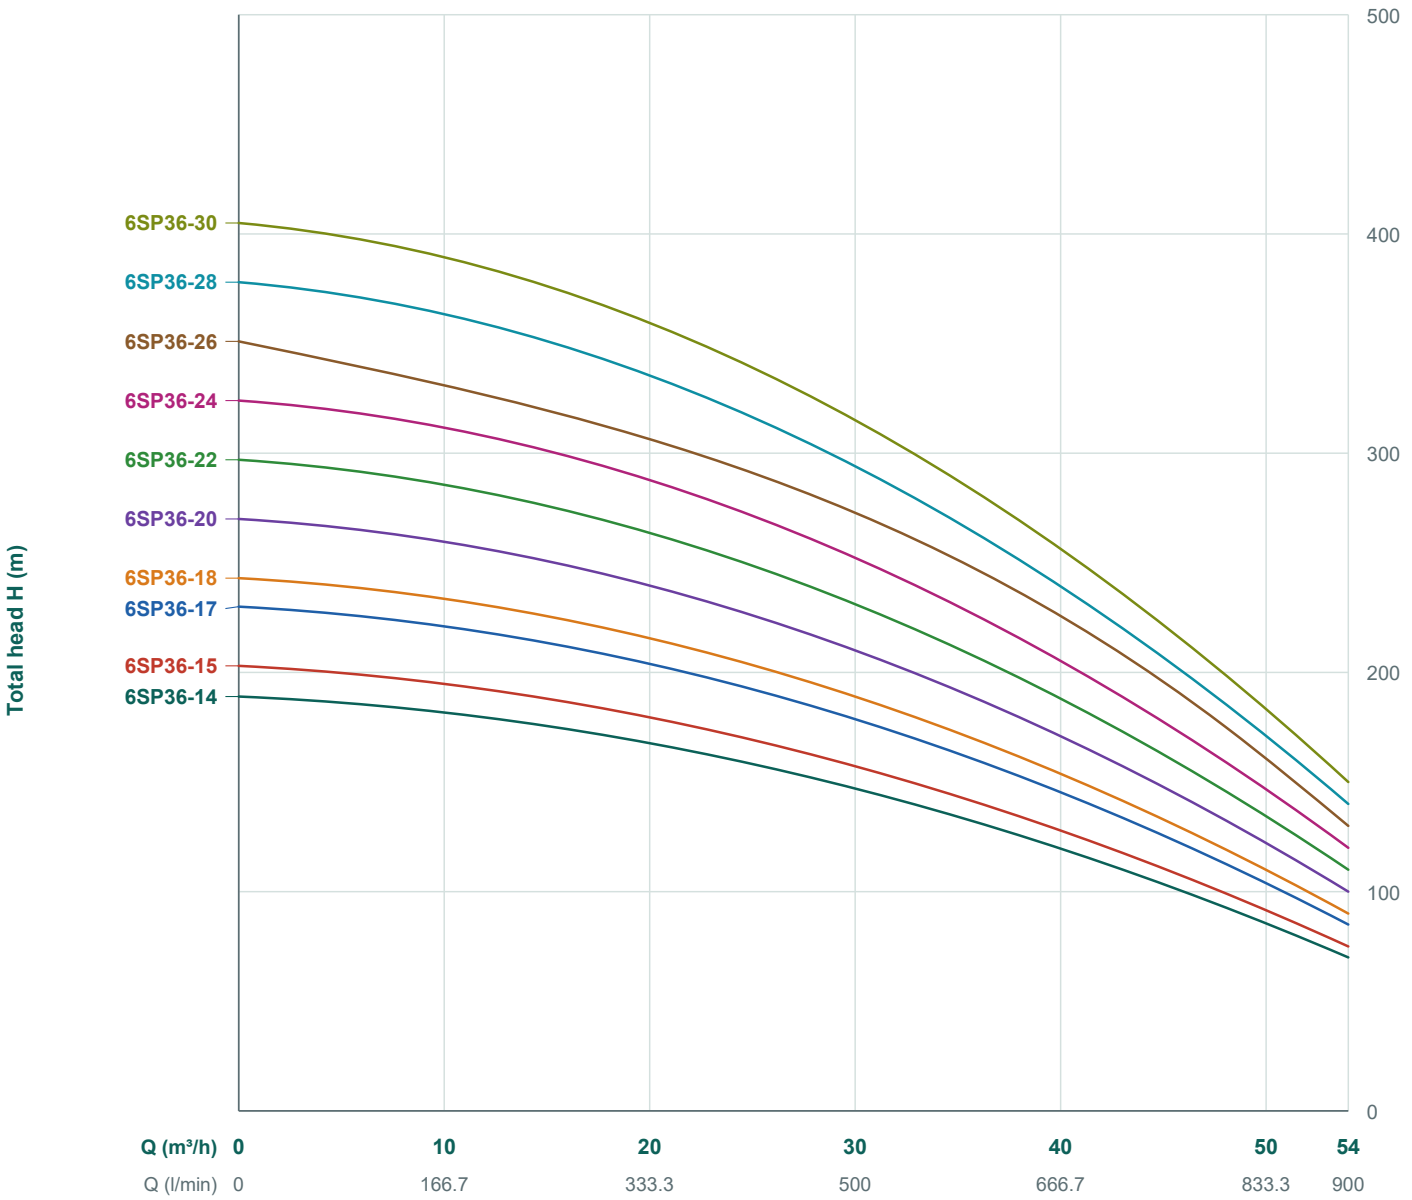

Diffuser height: 96 mm

PERFORMANCE DATA (2/2)

MODEL	P_2		Q	FLOW / TOTAL HEAD										Length
	kW	HP	m³/h	0	6	12	18	24	30	36	42	48	54	mm
			l/min	0	100	200	300	400	500	600	700	800	900	
6SP36-14	18.5	25		189	184	178	169	159	146	132	115	95	70	1616
6SP36-15	18.5	25		203	198	190	181	170	156	141	123	102	75	1712
6SP36-17	22	30		230	224	216	206	193	177	160	140	116	85	1904
6SP36-18	22	30		243	237	229	218	205	187	169	148	122	90	2000
6SP36-20	26	35	H (m)	270	263	254	242	227	208	188	165	136	100	2192
6SP36-22	30	40		297	290	279	266	250	229	207	181	150	110	2384
6SP36-24	30	40		324	316	305	290	273	250	226	198	163	120	2576
6SP36-26	37	50		351	342	330	315	296	270	244	214	177	130	2768
6SP36-28	37	50		378	369	356	339	318	291	263	231	190	140	2960
6SP36-30	37	50		405	395	381	363	341	312	282	247	204	150	3152

6SP46

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø142mm

MODEL CODE **6 SP 46 7-11**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 150mm (6 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

6SP46

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

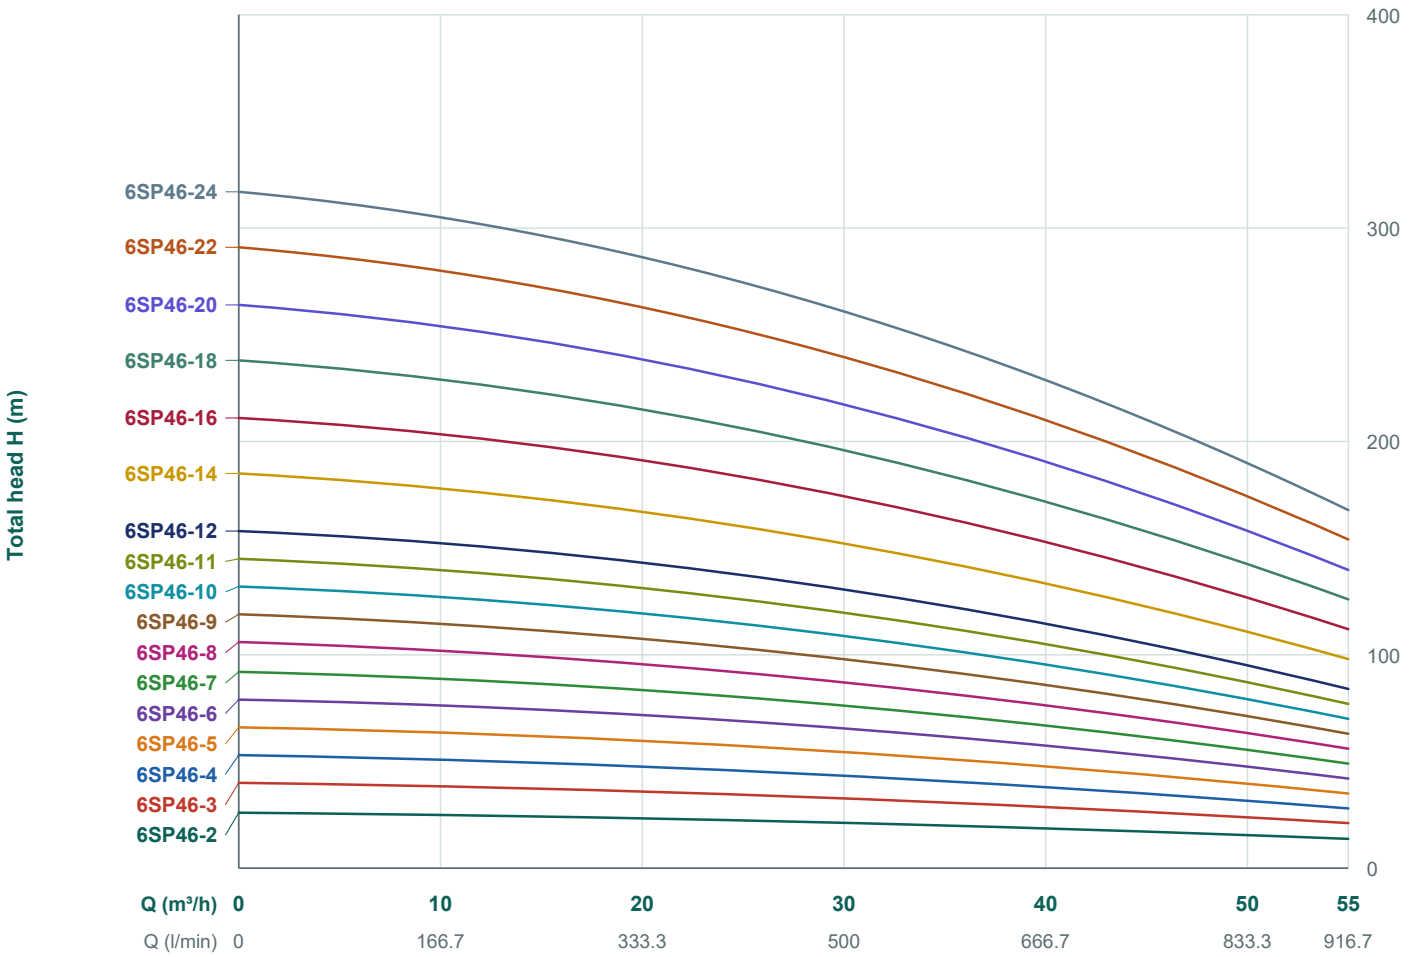

Diffuser height: 113 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD						Length
	kW	HP	m³/h	0	35	40	46	50	55	mm
			l/min	0	583.3	666.7	766.7	833.3	916.7	
6SP46-2	3	4		26	20	19	17	16	14	497
6SP46-3	5.5	7.5		40	30	29	26	24	21	610
6SP46-4	7.5	10		53	40	38	35	32	28	723
6SP46-5	7.5	10		66	50	48	44	40	35	836
6SP46-6	9.2	12.5		79	60	58	53	48	42	949
6SP46-7	11	15		92	70	67	62	56	49	1062
6SP46-8	13	17.5		106	80	77	70	64	56	1175
6SP46-9	15	20		119	90	86	79	72	63	1288
6SP46-10	15	20	H (m)	132	100	96	88	80	70	1401
6SP46-11	18.5	25		145	110	105	97	88	77	1514
6SP46-12	18.5	25		158	120	115	106	96	84	1627
6SP46-14	22	30		185	140	134	123	112	98	1853
6SP46-16	26	35		211	160	154	141	128	112	2079
6SP46-18	30	40		238	180	173	158	144	126	2305
6SP46-20	30	40		264	200	192	176	160	140	2531
6SP46-22	37	50		291	220	211	193	176	154	2757
6SP46-24	37	50		317	240	231	211	192	168	2983

6SP60

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 6 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø142mm

MODEL CODE **6 SP 60 6-11**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 150mm (6 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

6SP60

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 3 in | 3-phase: 380–415 V

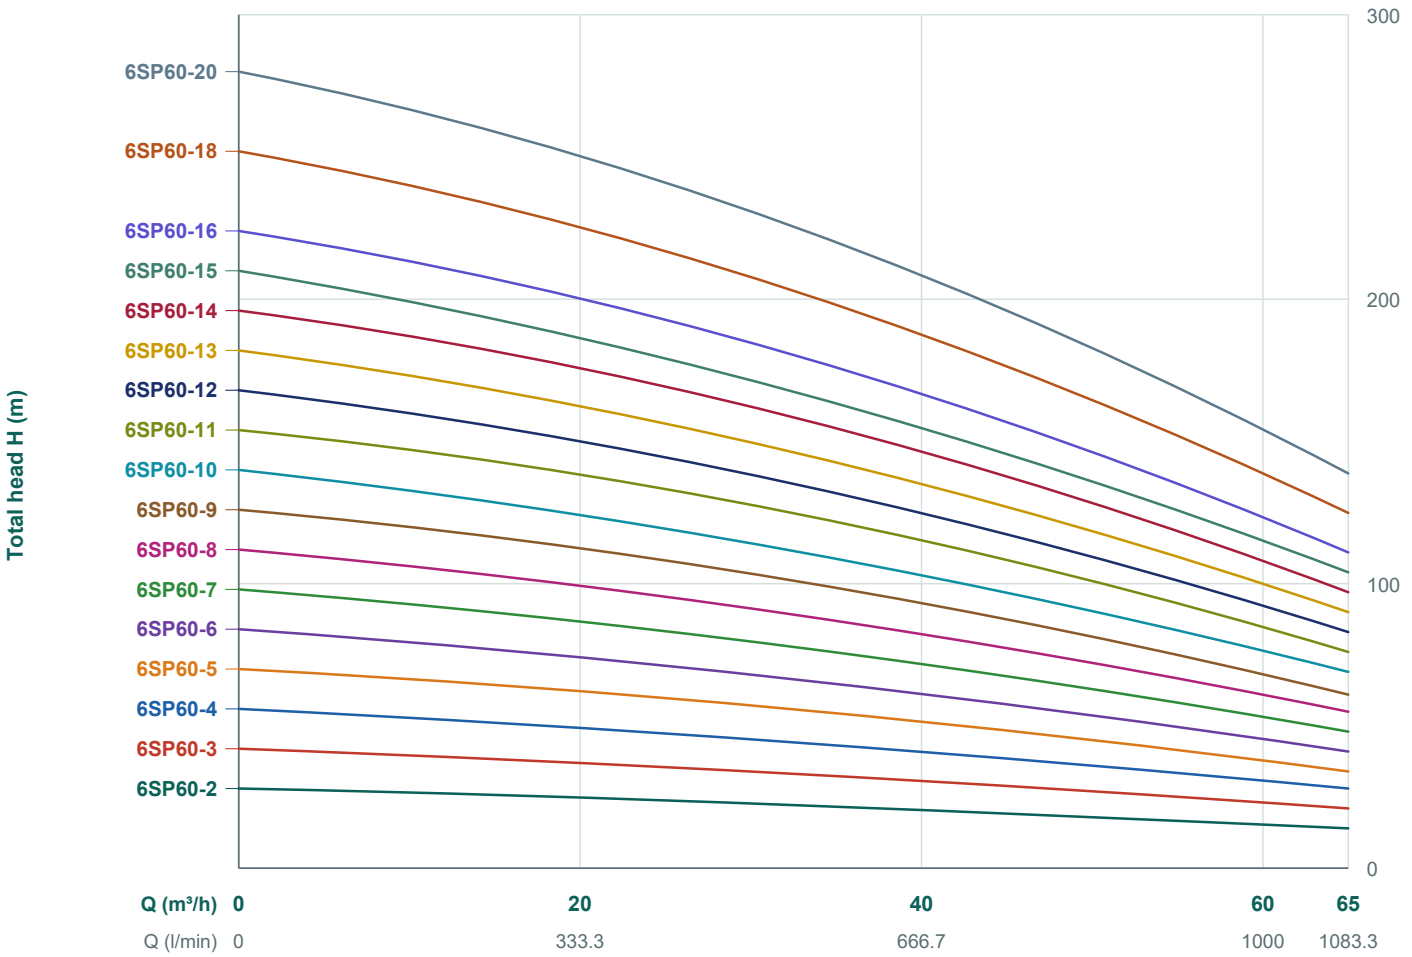

Diffuser height: 113 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD							Length
	kW	HP	m³/h	0	40	45	50	55	60	65	mm
			l/min	0	666.7	750	833.3	916.7	1000	1083.3	
6SP60-2	4	5.5		28	20	19	18	17	15	14	497
6SP60-3	5.5	7.5		42	30	29	27	25	23	21	610
6SP60-4	7.5	10		56	40	39	36	34	31	28	723
6SP60-5	9.2	12.5		70	51	48	45	42	39	34	836
6SP60-6	11	15		84	61	57	54	50	46	41	949
6SP60-7	13	17.5		98	72	67	63	58	54	48	1062
6SP60-8	15	20		112	82	77	72	67	62	55	1175
6SP60-9	18.5	25		126	93	87	81	75	70	61	1288
6SP60-10	18.5	25	H (m)	140	103	96	90	84	78	69	1401
6SP60-11	22	30		154	116	108	100	93	86	76	1514
6SP60-12	22	30		168	124	116	110	102	94	83	1627
6SP60-13	26	35		182	134	127	118	110	102	90	1740
6SP60-14	26	35		196	146	137	128	119	110	97	1853
6SP60-15	26	35		210	155	145	135	126	117	104	1966
6SP60-16	30	40		224	168	156	145	135	125	111	2079
6SP60-18	37	50		252	189	176	163	152	141	125	2305
6SP60-20	37	50		280	210	195	181	169	156	139	2531

8SP77

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø175mm

MODEL CODE **8 SP 77 3-11**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 200mm (8 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

8SP77

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 5 in

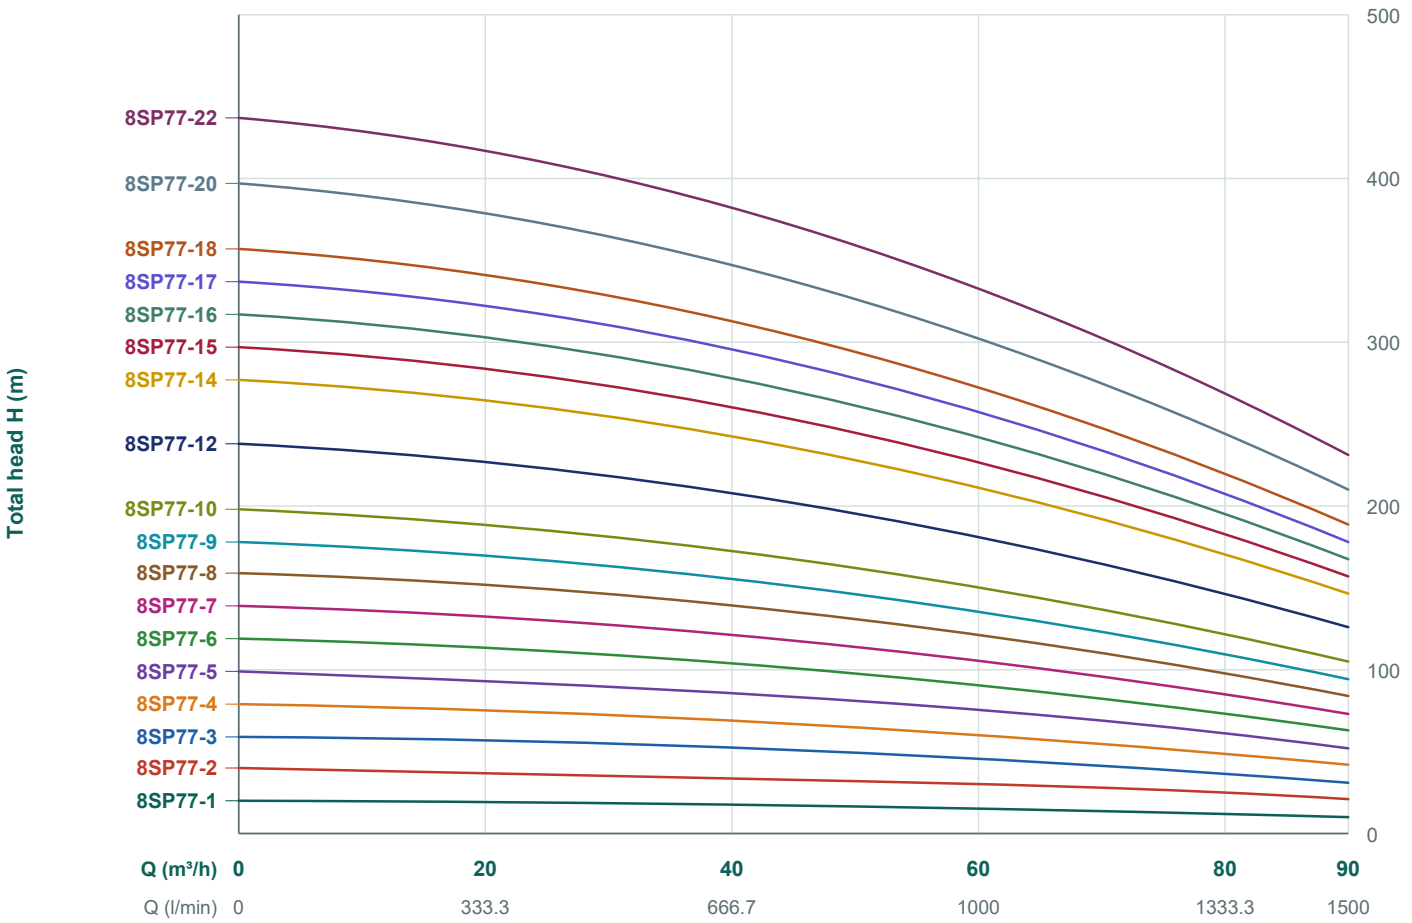

Diffuser height: 128 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD						Length1
	kW	HP	m³/h	0	50	60	70	77	90	mm
			l/min	0	833.3	1000	1166.7	1283.3	1500	
8SP77-1	5.5	7.5		20	16	15	14	13	10	563
8SP77-2	7.5	10		40	31	30	28	27	21	691
8SP77-3	11	15		59	49	44	42	40	31	819
8SP77-4	15	20		79	63	59	56	53	42	947
8SP77-5	18.5	25		99	78	74	70	67	52	1075
8SP77-6	22	30		119	94	89	84	80	63	1203
8SP77-7	26	35		139	110	104	98	93	73	1331
8SP77-8	30	40		159	125	119	112	107	84	1459
8SP77-9	37	50	H (m)	178	141	134	126	119	94	1587
8SP77-10	37	50		198	157	148	140	133	105	1715
8SP77-12	45	60		238	188	178	168	160	126	1971
8SP77-14	55	75		277	219	207	196	186	147	2227
8SP77-15	55	75		297	235	222	210	200	157	2355
8SP77-16	63	85		317	251	237	224	213	167	2483
8SP77-17	63	85		337	266	252	238	227	178	2611
8SP77-18	63	85		357	282	267	252	240	189	2739
8SP77-20	75	100		397	313	297	280	267	210	2995
8SP77-22	75	100		437	344	327	308	293	231	3251

8SP95

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø175mm

MODEL CODE **8 SP 95 5-22**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 200mm (8 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

8SP95

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 5 in

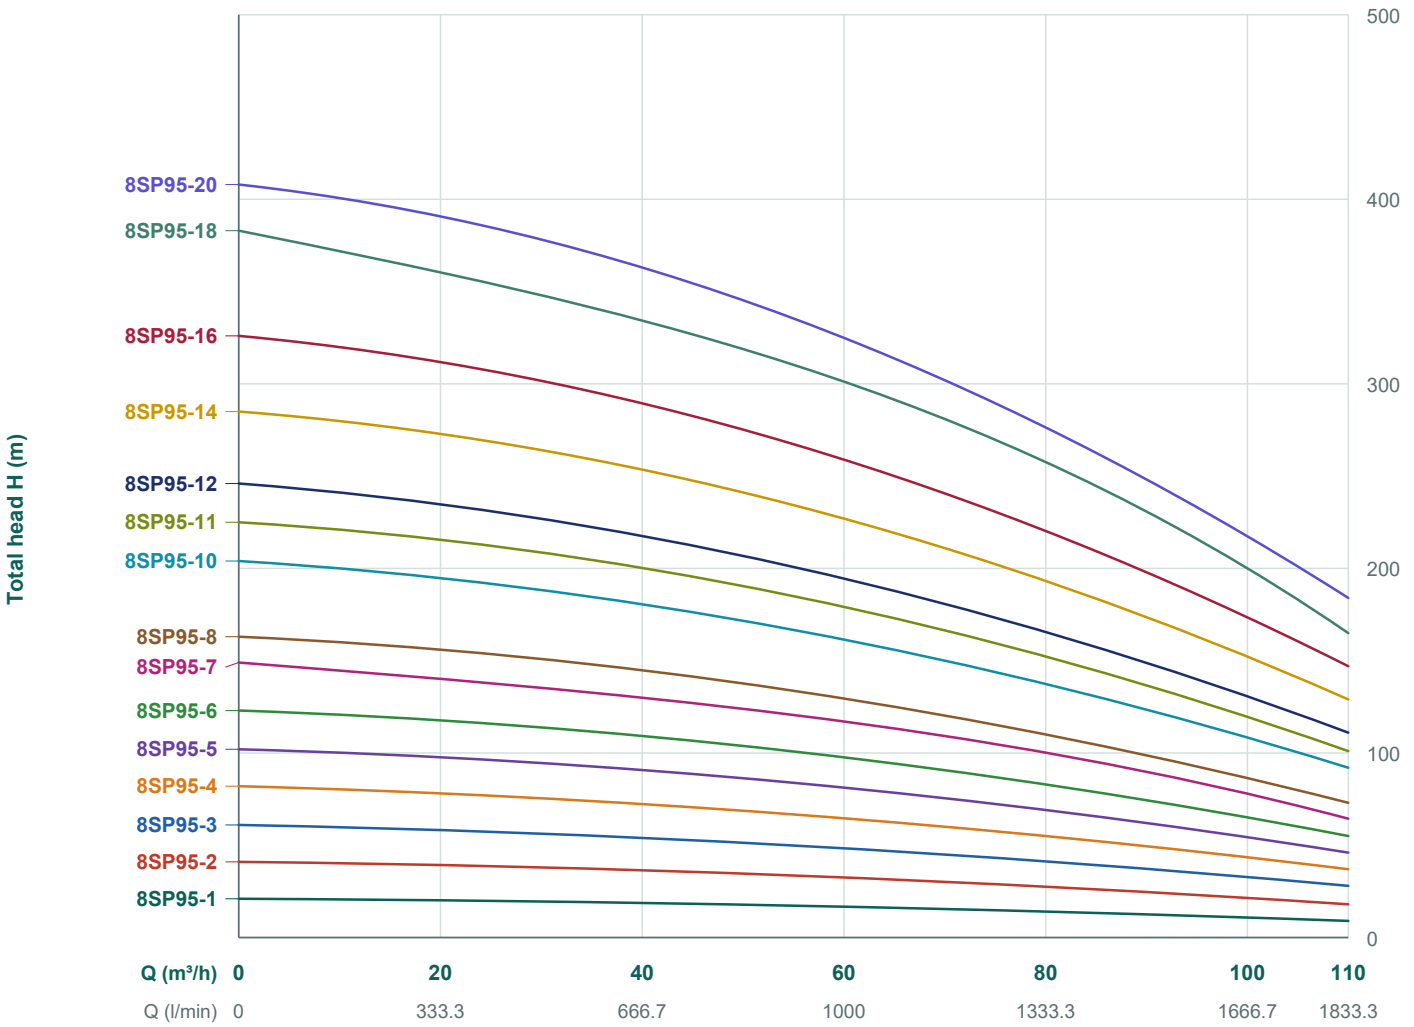

Diffuser height: 128 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD							Length
	kW	HP	m³/h	0	60	80	90	95	100	110	mm
			l/min	0	1000	1333.3	1500	1583.3	1666.7	1833.3	
8SP95-1	5.5	7.5		21	16	14	13	12	11	9	563
8SP95-2	9.2	12.5		41	31	28	25	24	22	18	691
8SP95-3	13	17.5		61	47	41	38	36	33	28	819
8SP95-4	18.5	25		82	62	55	50	48	45	37	947
8SP95-5	22	30		102	78	69	63	60	56	46	1075
8SP95-6	26	35		123	94	83	75	72	67	55	1203
8SP95-7	37	50		149	113	100	90	84	78	64	1331
8SP95-8	37	50	H (m)	163	124	110	100	96	89	73	1459
8SP95-10	45	60		204	155	137	125	120	112	92	1715
8SP95-11	55	75		225	172	152	139	132	123	101	1843
8SP95-12	55	75		246	187	165	151	144	135	111	1971
8SP95-14	63	85		285	218	193	176	168	157	129	2227
8SP95-16	75	100		326	249	220	199	193	179	147	2483
8SP95-18	92	125		383	291	258	231	216	200	165	2739
8SP95-20	93	125		408	312	276	252	240	224	184	2995

8SP120

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø175mm

MODEL CODE **8 SP 120 5-30**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 200mm (8 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

8SP120

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 5 in

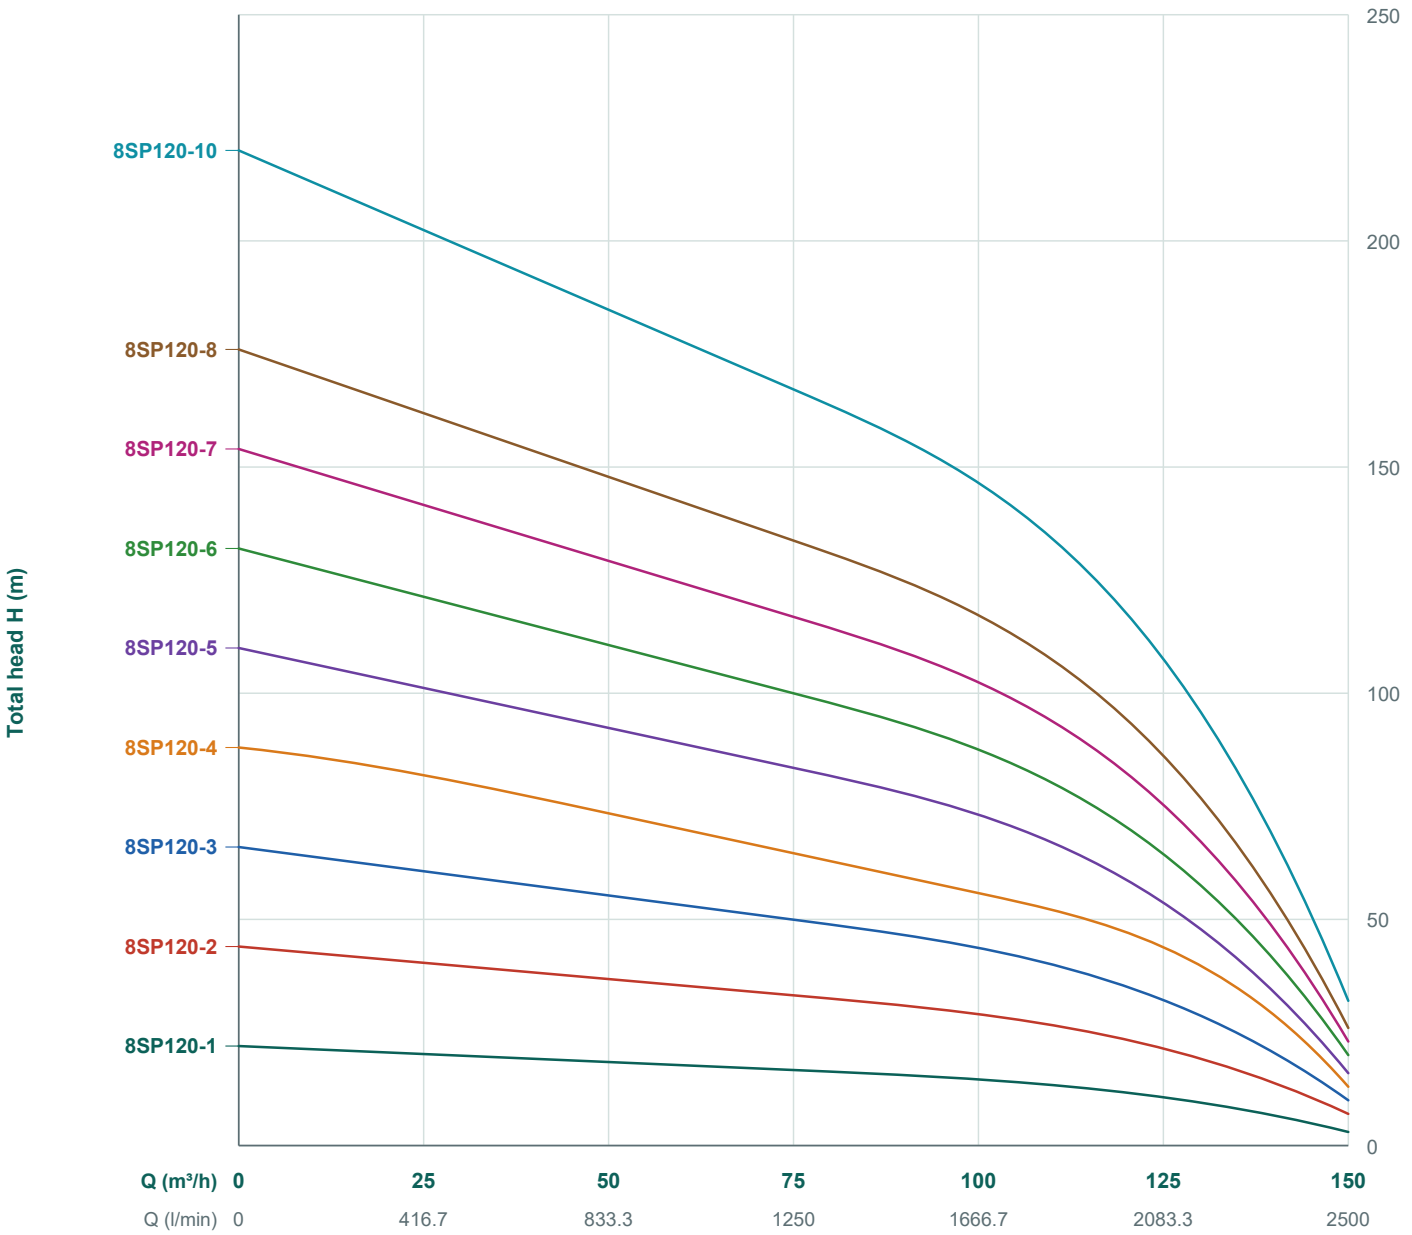

Diffuser height: 128 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD							Length
	kW	HP	m³/h	0	60	100	110	120	130	150	mm
			l/min	0	1000	1666.7	1833.3	2000	2166.7	2500	
8SP120-1	7.5	10		22	17	14	13	12	10	3	563
8SP120-2	13	17.5		44	35	28	26	24	20	7	691
8SP120-3	18.5	25		66	53	42	39	36	30	10	819
8SP120-4	22	30		88	70	57	50	48	40	13	947
8SP120-5	30	40	H (m)	110	88	71	65	60	50	16	1075
8SP120-6	37	50		132	105	85	78	72	60	20	1203
8SP120-7	45	60		154	123	100	91	84	70	23	1331
8SP120-8	55	75		176	140	114	105	96	80	26	1459
8SP120-10	63	85		220	176	143	130	120	100	32	1715

10SP125

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 10 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø210mm

MODEL CODE **10 SP 125 5-55**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 250mm (10 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

10SP125

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 5 in

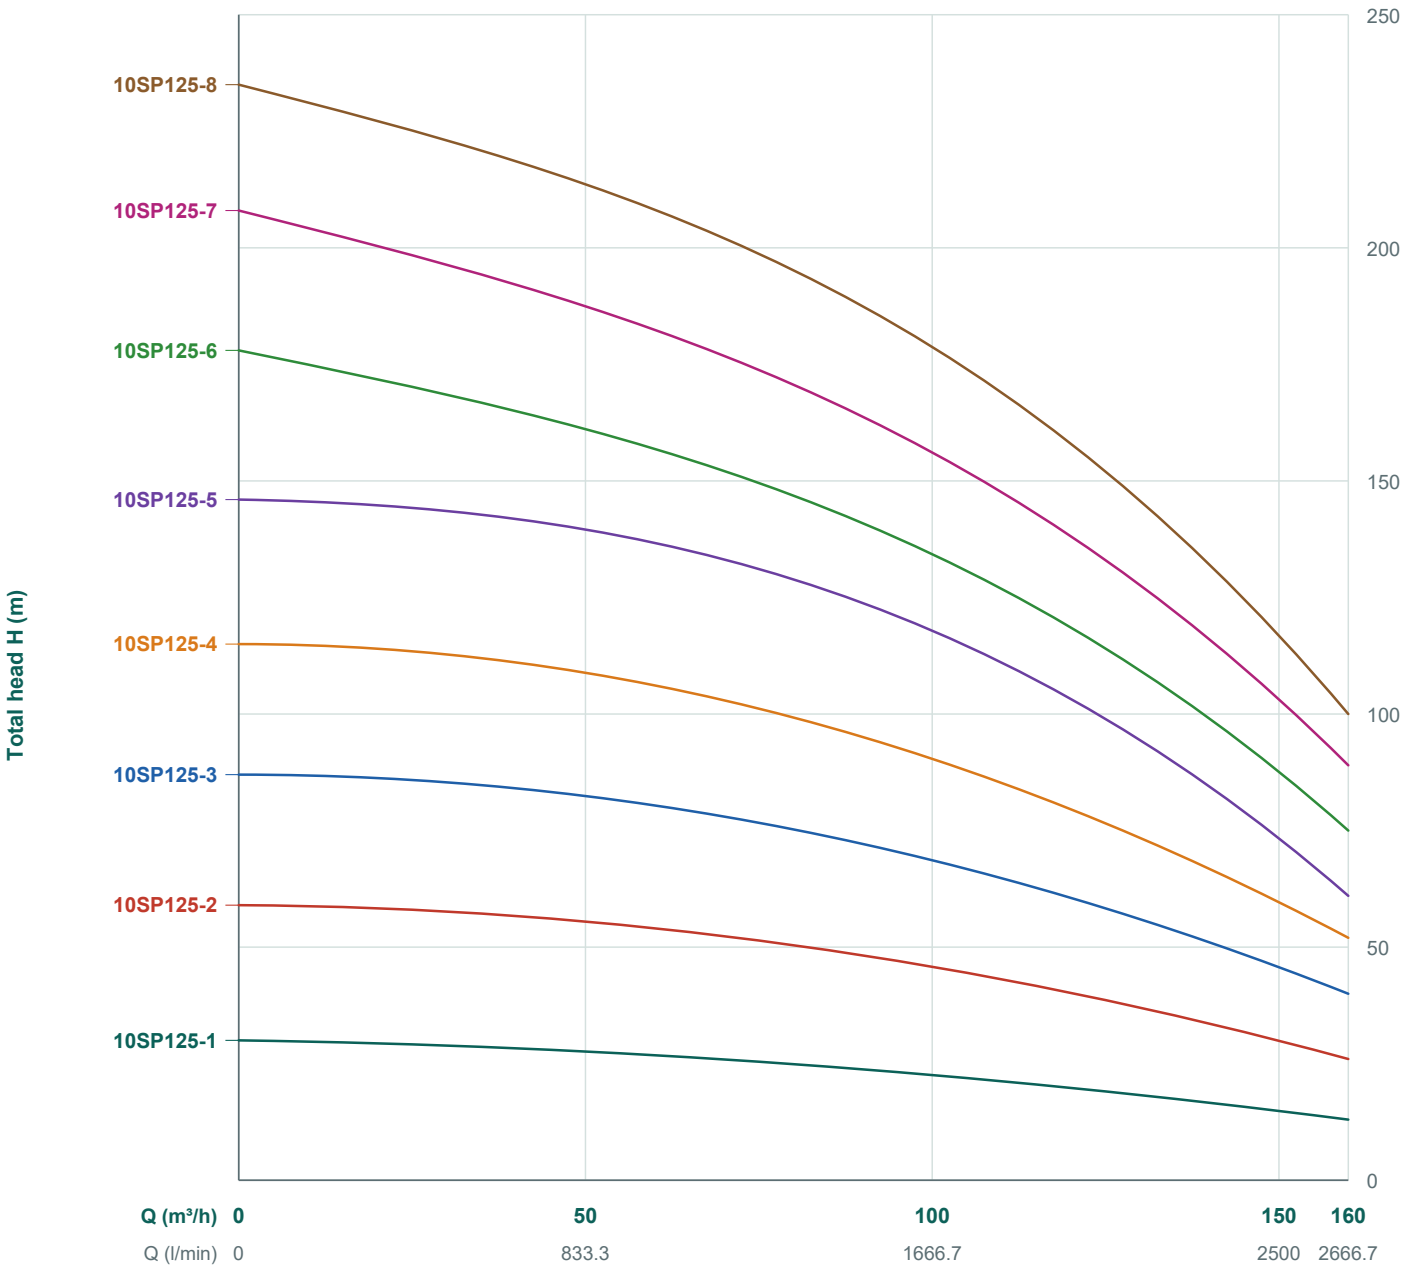

Diffuser height: 156 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD							Length
	kW	HP	m³/h	0	50	80	100	125	140	160	mm
			l/min	0	833.3	1333.3	1666.7	2083.3	2333.3	2666.7	
10SP125-1	11	15		30	28	24	22	20	17	13	616
10SP125-2	22	30		59	55	49	45	40	35	26	772
10SP125-3	30	40		87	83	74	67	60	53	40	928
10SP125-4	37	50	H (m)	115	110	98	91	80	70	52	1084
10SP125-5	55	75		146	141	127	118	100	84	61	1240
10SP125-6	63	85		178	165	142	130	120	100	75	1396
10SP125-7	75	100		208	192	165	152	140	115	89	1552
10SP125-8	93	125		235	220	189	172	160	132	100	1708

10SP135

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 10 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø210mm

MODEL CODE **10 SP 135 5-55**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 250mm (10 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

10SP135

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 6 in

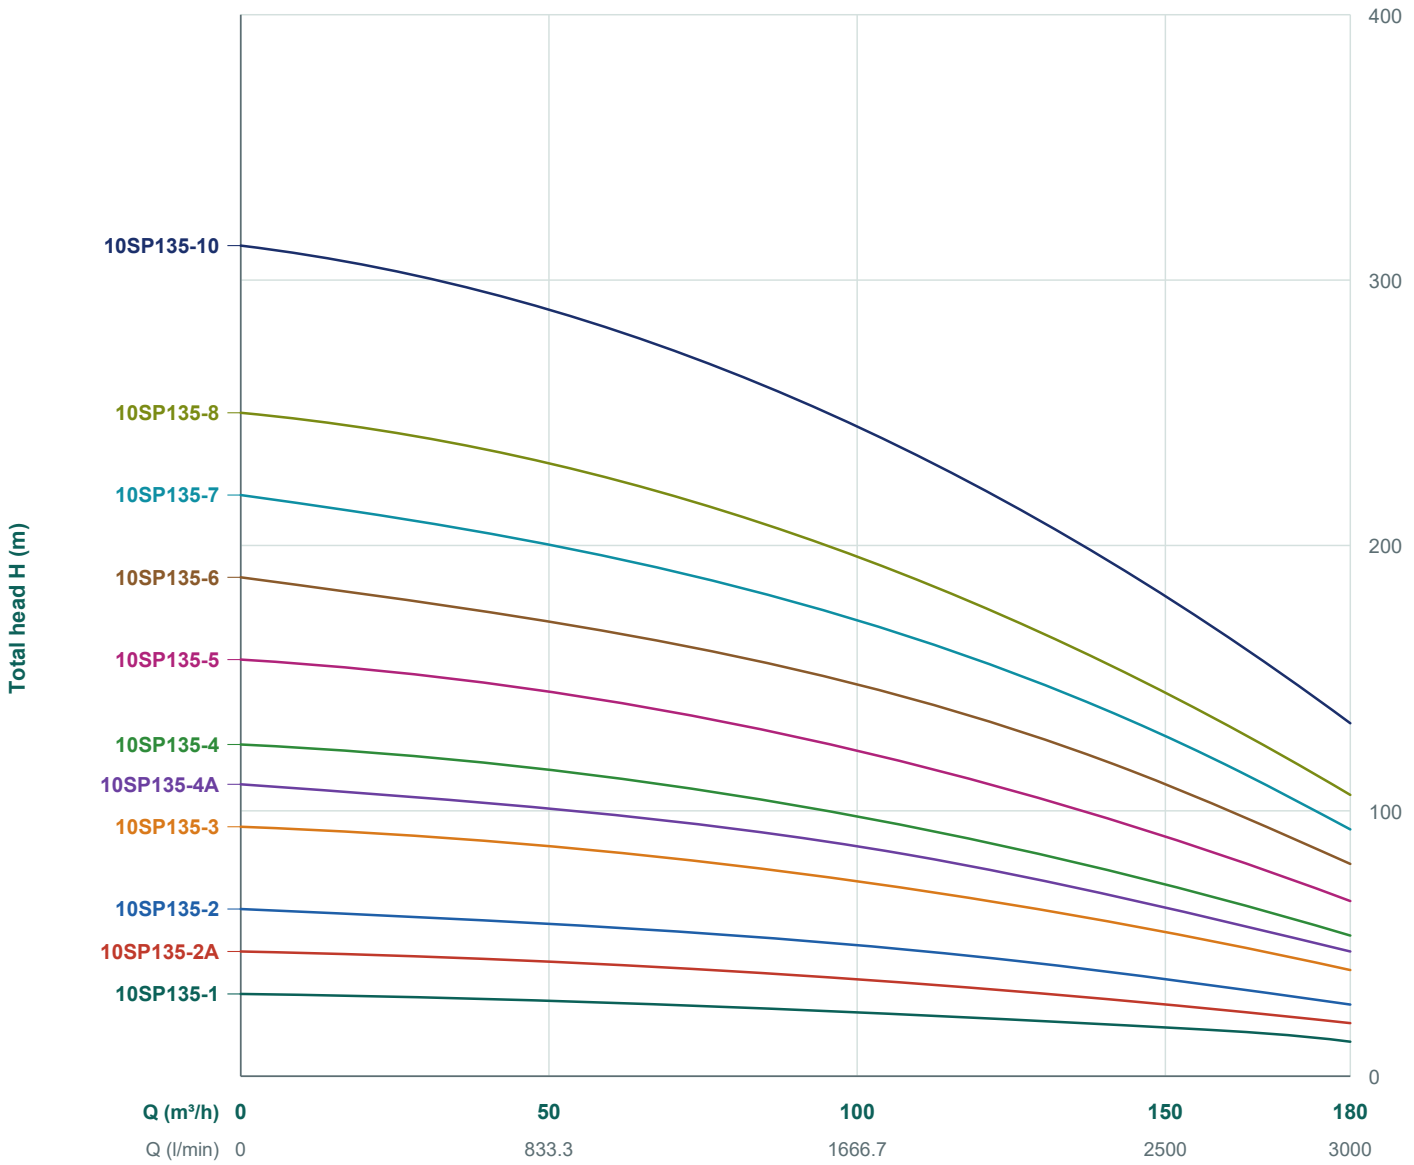

Diffuser height: 156 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD											Length
	kW	HP	m³/h	0	18	36	54	72	90	108	126	144	162	180	
			l/min	0	300	600	900	1200	1500	1800	2100	2400	2700	3000	mm
10SP135-1	11	15		31	30	29	28	27	25	23	21	19	17	13	610
10SP135-2A	18.5	25		47	46	45	43	41	38	35	32	29	25	20	766
10SP135-2	22	30		63	62	59	57	54	51	47	43	39	33	27	766
10SP135-3	30	40		94	93	89	86	81	76	70	64	58	50	40	922
10SP135-4A	37	50		110	109	104	100	95	89	82	75	68	58	47	1078
10SP135-4	45	60	H (m)	125	124	119	115	108	101	93	85	77	67	53	1078
10SP135-5	55	75		157	155	149	144	135	127	117	107	96	83	66	1234
10SP135-6	63	85		188	186	178	172	162	152	140	128	116	100	80	1390
10SP135-7	75	100		219	217	208	201	189	177	163	149	135	117	93	1546
10SP135-8	92	125		250	248	238	230	216	202	186	170	154	134	106	1702
10SP135-10	110	150		313	310	297	287	270	253	233	213	193	167	133	2014

10SP160

STAINLESS STEEL SUBMERSIBLE PUMPS



APPLICATIONS

For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 10 in

MOTOR AND PUMP

Rewindable motor or Full obturated screen motor
Direct start (1 cable)
Star-delta start (2 cables)
Equipped with start control box or digital auto-control box
NEMA dimension standards
Curve tolerance according to ISO 9906
Maximum diameter Ø210mm

MODEL CODE **10 SP 160 5-63**

Well diameter / SP series / Capacity (m³/h) / Stage / Motor power (kW)
Well diameter: 250mm (10 in)

COMPONENTS AND MATERIALS


COMPONENT	MATERIAL
Delivery casing	AISI 304 / AISI 316ss
Check valve	AISI 304 / AISI 316ss
Suction lantern	AISI 304 / AISI 316ss
Stage casing	AISI 304 / AISI 316ss
Impeller	AISI 304 / AISI 316ss
Shaft	AISI 316ss
Shaft coupling	AISI 316ss
Wear ring	Rubber
Motor external casing	AISI 304ss
Top cover	Cast iron G20 UNI5007 / AISI 304ss
Seal	NBR / Carbon-SIC/TC
Motor shaft	AISI 304ss-C1045
Thrust bearing	Ceramic/Carbon
Radial bearing	Ceramic/TC

10SP160

AQUARIS MADE IN ITALY

STAINLESS STEEL SUBMERSIBLE PUMPS

n ≈ 2850 /min | 50 Hz | Outlet: 6 in

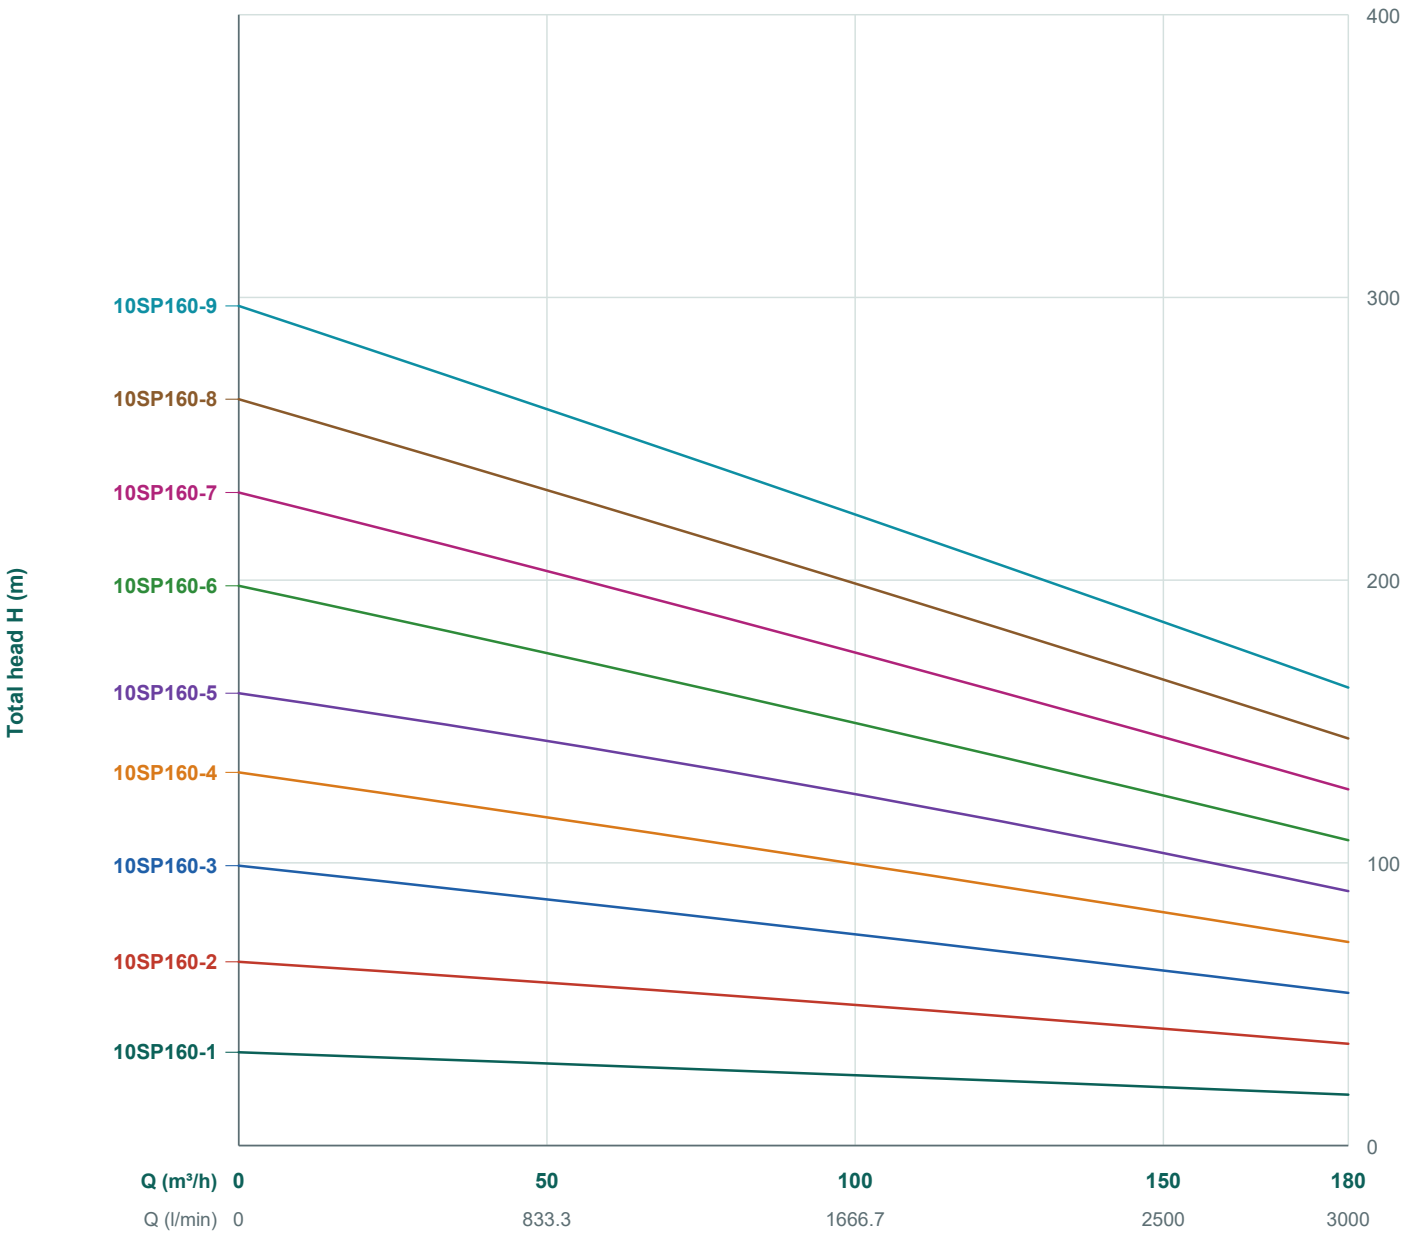

Diffuser height: 156 mm

PERFORMANCE DATA

MODEL	P_2		Q	FLOW / TOTAL HEAD					Length
	kW	HP	m³/h	0	100	120	160	180	mm
			l/min	0	1666.7	2000	2666.7	3000	
10SP160-1	13	17.5		33	25	23	20	18	616
10SP160-2	26	35		65	50	46	40	36	772
10SP160-3	37	50		99	75	69	60	54	928
10SP160-4	55	75		132	100	92	80	72	1084
10SP160-5	63	85	H (m)	160	125	115	100	90	1240
10SP160-6	75	100		198	150	138	120	108	1396
10SP160-7	93	125		231	175	161	140	126	1552
10SP160-8	93	125		264	200	183	160	144	1708
10SP160-9	110	150		297	225	205	180	162	1864