
50WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 2900 /min

AQUARIS
MADE IN ITALY



1.5 – 7.5 kW	2	DN50	50 m³/h	45 m	n ≈ 2900 /min
POWER	POLES	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

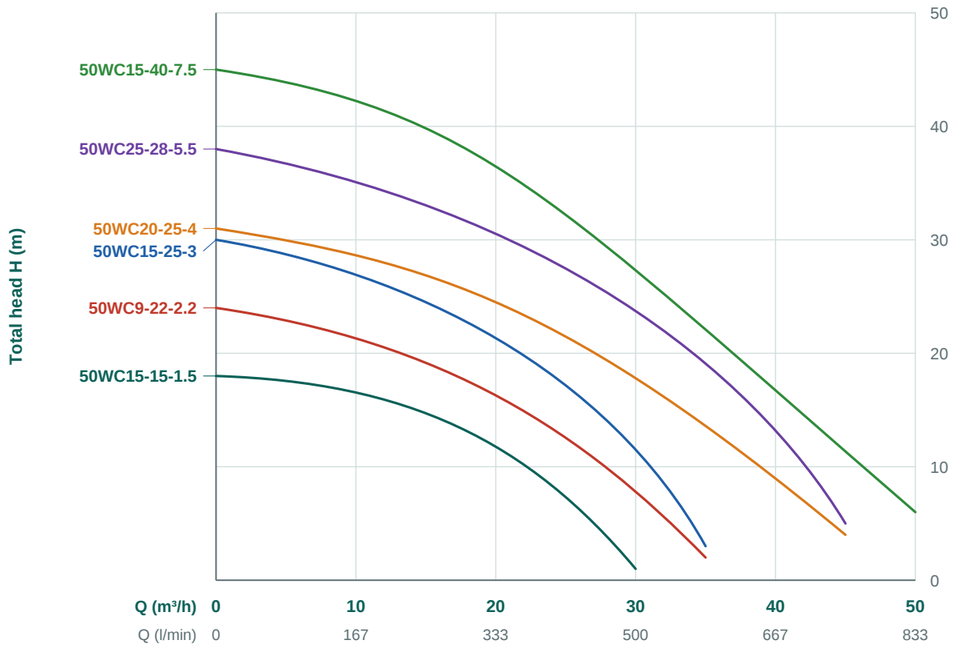

PRODUCT NOMENCLATURE

50	Outlet size (mm)
WC	Model
15	Rated flow (m³/h)
15	Rated head (m)
1.5	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		P_2 kW	P_2 HP	Q m³/h Q l/min	0 0	5 83	10 167	15 250	20 333	25 417	30 500	35 583	40 667	45 750	50 833
50WC15-15-1.5 50WCD15-15-1.5	3~ 1~	1.5	2	H (m)	18	18	17	15	12	7	1				
50WC9-22-2.2 50WCD9-22-2.2	3~ 1~	2.2	3		24	23	22	19	16	12	8	2			
50WC15-25-3	3~	3	4		30	29	28	25	21	17	11	3			
50WC20-25-4	3~	4	5.5		31	31	29	28	25	22	18	13	9	4	
50WC25-28-5.5	3~	5.5	7.5		38	38	36	34	32	28	23	19	13	5	
50WC15-40-7.5	3~	7.5	10		45	44	42	40	36	32	28	22	16	11	6


65WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 2900 /min

AQUARIS
MADE IN ITALY



1.5 – 7.5 kW	2	DN65	65 m³/h	45 m	n ≈ 2900 /min
POWER	POLES	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

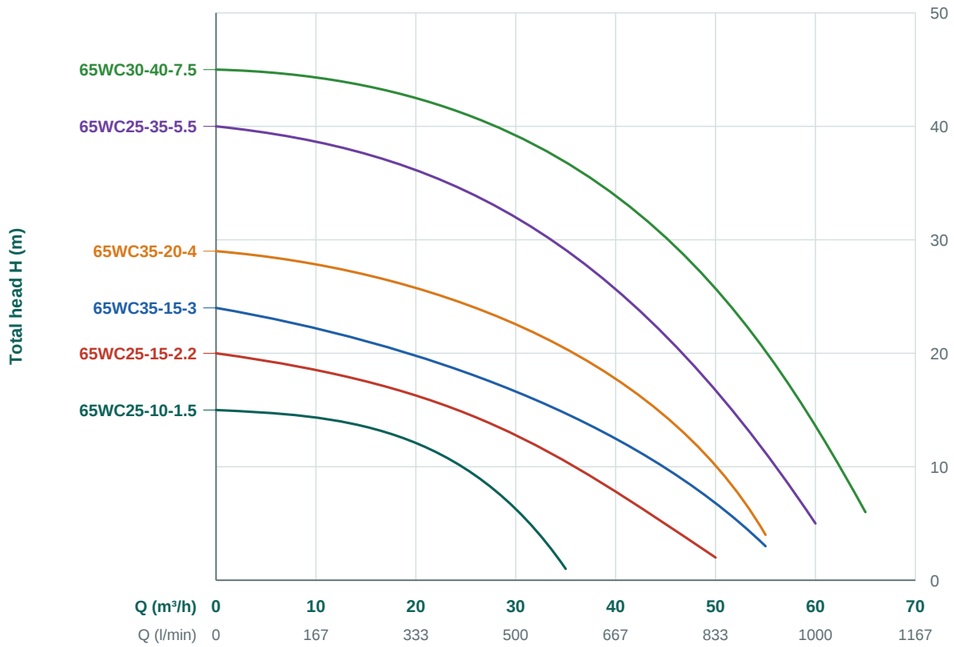

PRODUCT NOMENCLATURE

65	Outlet size (mm)
WC	Model
25	Rated flow (m³/h)
10	Rated head (m)
1.5	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		P_2 kW	P_2 HP	Q m³/h	0	5	10	15	20	25	30	35	40	45	50	55	60	65
				Q l/min	0	83	167	250	333	417	500	583	667	750	833	917	1000	1083
65WC25-10-1.5 65WCD25-10-1.5	3~ 1~	1.5	2	H (m)	15	15	15	14	12	10	6	1						
65WC25-15-2.2 65WCD25-15-2.2	3~ 1~	2.2	3		20	20	19	18	17	15	13	10	8	5	2			
65WC35-15-3	3~	3	4		24	24	23	22	20	19	17	15	12	10	7	3		
65WC35-20-4	3~	4	5.5		29	29	29	28	27	25	23	20	17	14	10	4		
65WC25-35-5.5	3~	5.5	7.5		40	40	39	38	37	35	33	30	26	21	16	11	5	
65WC30-40-7.5	3~	7.5	10		45	45	45	44	43	42	40	37	34	30	26	20	13	6


80WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 2900 /min

AQUARIS
MADE IN ITALY



2.2 – 9.5 kW	2	DN80	120 m³/h	40 m	n ≈ 2900 /min
POWER	POLES	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

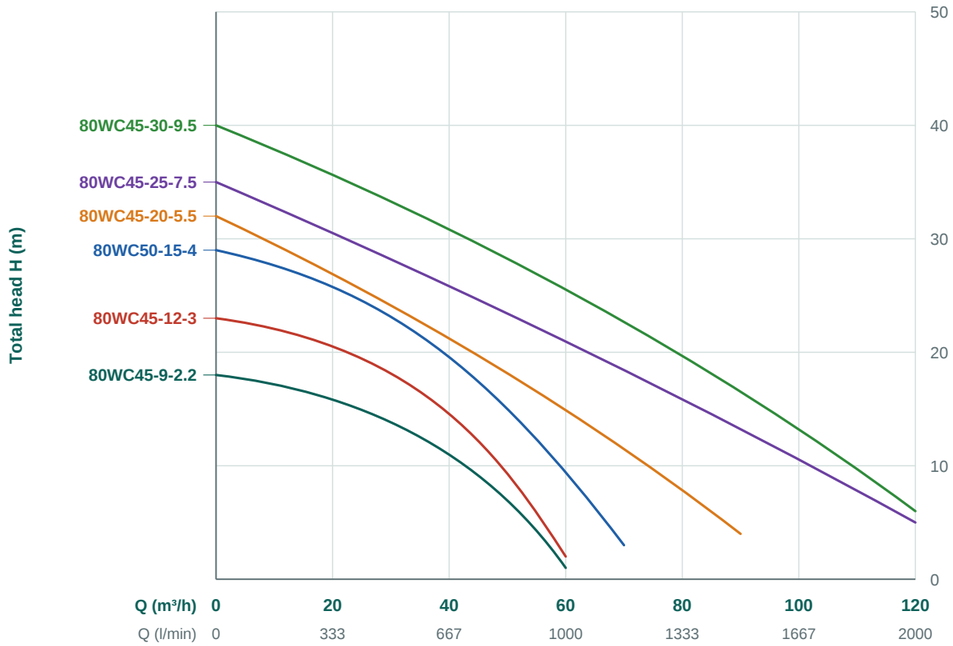

PRODUCT NOMENCLATURE

80	Outlet size (mm)
WC	Model
45	Rated flow (m³/h)
9	Rated head (m)
2.2	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		P_2 kW	P_2 HP	Q m³/h	0	10	20	30	40	50	60	70	80	90	100	110	120
				Q l/min	0	167	333	500	667	833	1000	1167	1333	1500	1667	1833	2000
80WC45-9-2.2 80WCD45-9-2.2	3~ 1~	2.2	3	H (m)	18	18	16	14	11	7	1						
80WC45-12-3	3~	3	4		23	23	21	19	15	9	2						
80WC50-15-4	3~	4	5.5		29	28	27	24	20	15	9	3					
80WC45-20-5.5	3~	5.5	7.5		32	30	28	25	22	18	15	11	8	4			
80WC45-25-7.5	3~	7.5	10		35	33	31	29	26	24	21	18	16	13	11	8	5
80WC45-30-9.5	3~	9.5	13		40	38	36	34	31	29	26	23	19	16	13	10	6


100WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 2900 /min

AQUARIS
MADE IN ITALY



4 – 22 kW	2	DN100	240 m³/h	65 m	n ≈ 2900 /min
POWER	POLES	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

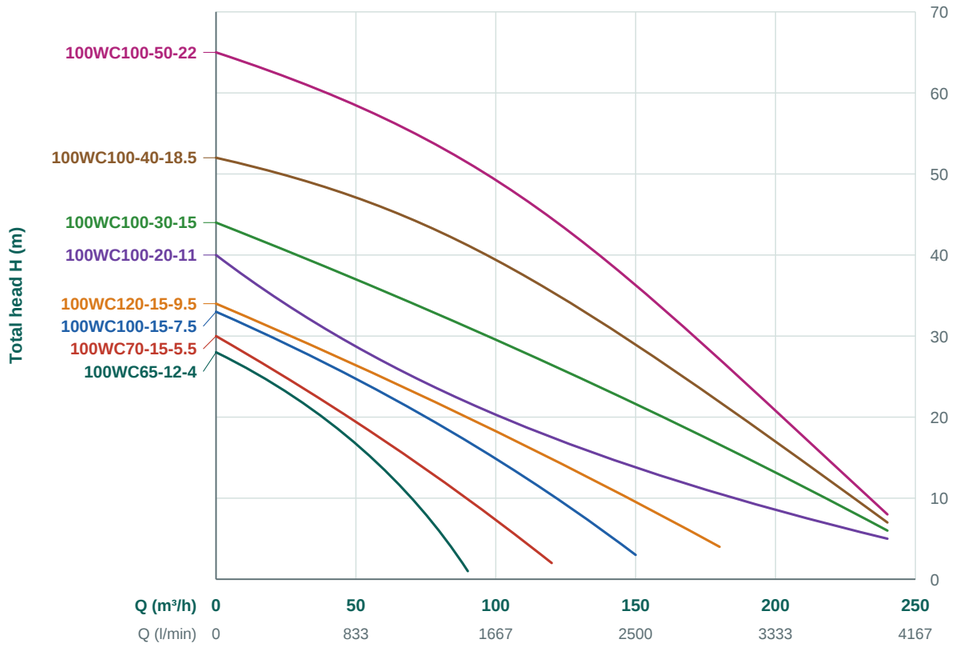

PRODUCT NOMENCLATURE

100	Outlet size (mm)
WC	Model
65	Rated flow (m³/h)
12	Rated head (m)
4	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL		P_2		Q	m³/h	0	30	60	90	120	150	180	210	240
3~ 380–415 V / 1~ 220–240 V		kW	HP		l/min	0	500	1000	1500	2000	2500	3000	3500	4000
100WC65-12-4	3~	4	5.5	H (m)		28	23	14	1					
100WC70-15-5.5	3~	5.5	7.5			30	24	17	10	2				
100WC100-15-7.5	3~	7.5	10			33	29	24	17	10	3			
100WC120-15-9.5	3~	9.5	13			34	30	25	20	15	10	4		
100WC100-20-11	3~	11	15			40	34	27	22	17	14	11	8	5
100WC100-30-15	3~	15	20			44	40	36	32	27	21	17	11	6
100WC100-40-18.5	3~	18.5	25			52	49	46	41	35	29	22	15	7
100WC100-50-22	3~	22	30			65	62	58	52	45	37	26	17	8


150WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 2900 /min

AQUARIS
MADE IN ITALY



5.5 – 22 kW	2	DN150	360 m³/h	44 m	n ≈ 2900 /min
POWER	POLES	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

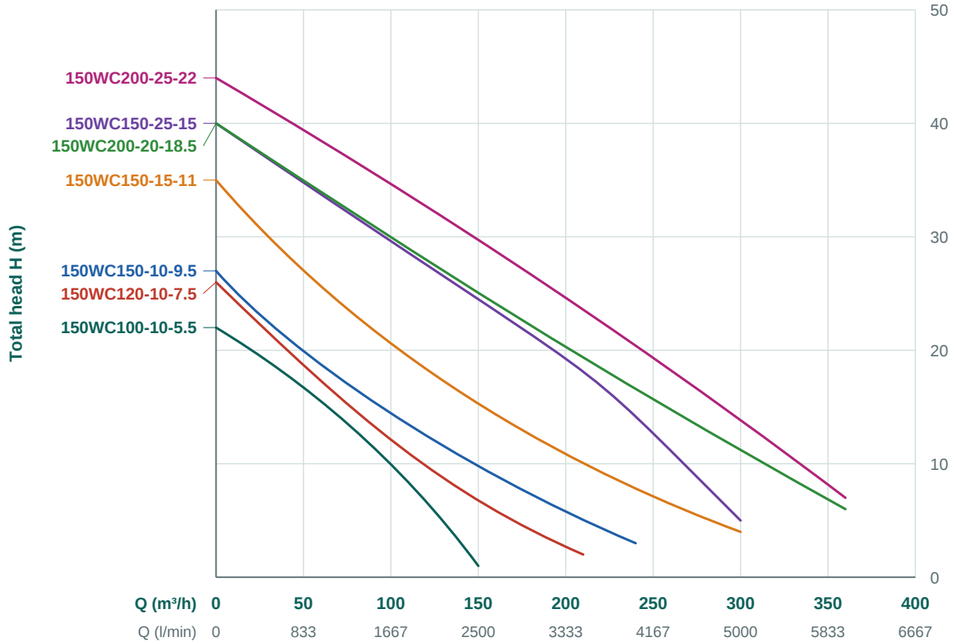

PRODUCT NOMENCLATURE

150	Outlet size (mm)
WC	Model
100	Rated flow (m³/h)
10	Rated head (m)
5.5	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL		P_2		Q	m³/h	0	30	60	90	120	150	180	210	240	270	300	330	360
3~ 380–415 V / 1~ 220–240 V		kW	HP		l/min	0	500	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000
150WC100-10-5.5	3~	5.5	7.5	H (m)		22	19	16	12	7	1							
150WC120-10-7.5	3~	7.5	10			26	22	17	14	10	7	4	2					
150WC150-10-9.5	3~	9.5	13			27	22	18	15	13	10	7	5	3				
150WC150-15-11	3~	11	15			35	30	26	22	18	15	12	10	8	6	4		
150WC150-25-15	3~	15	20			40	37	34	31	28	25	21	18	14	10	5		
150WC200-20-18.5	3~	18.5	25			40	37	34	31	28	25	22	19	17	14	11	9	6
150WC200-25-22	3~	22	30			44	42	40	37	34	31	27	24	20	17	14	10	7


200WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 1450 /min

AQUARIS
MADE IN ITALY



11 – 30 kW	DN200	600 m³/h	32 m	n ≈ 1450 /min
POWER	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

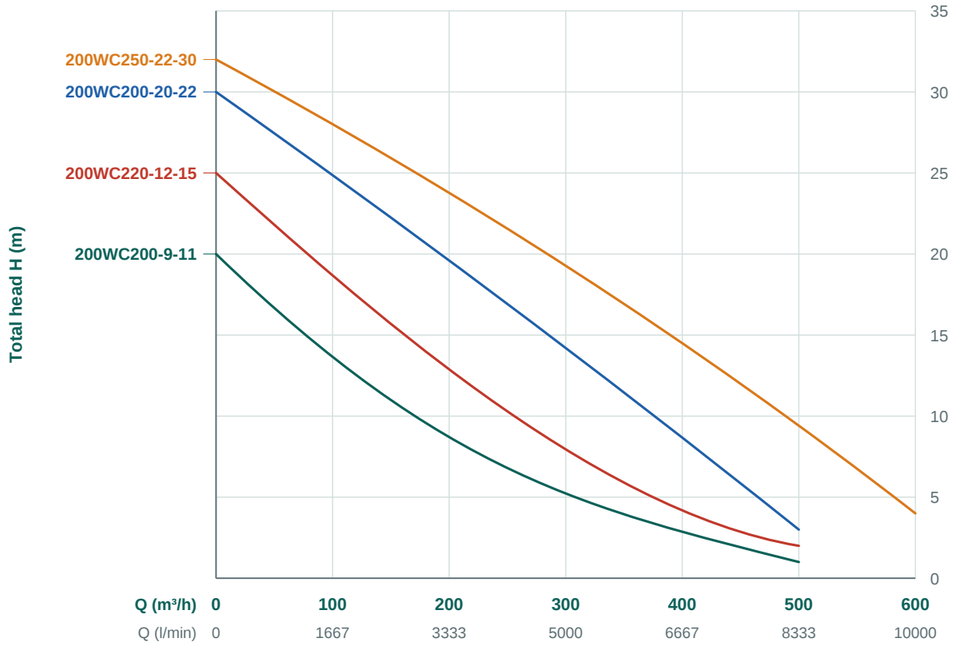

PRODUCT NOMENCLATURE

200	Outlet size (mm)
WC	Model
200	Rated flow (m³/h)
9	Rated head (m)
11	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL		P_2		Q m³/h	0	50	100	150	200	250	300	350	400	450	500	550	600
3~ 380–415 V / 1~ 220–240 V		kW	HP	l/min	0	833	1667	2500	3333	4167	5000	5833	6667	7500	8333	9167	10000
200WC200-9-11	3~	11	15	H (m)	20	17	14	11	9	7	5	4	3	2	1		
200WC220-12-15	3~	15	20		25	22	19	16	13	10	8	6	4	3	2		
200WC200-20-22	3~	22	30		30	28	25	23	20	17	14	11	9	6	3		
200WC250-22-30	3~	30	40		32	30	28	26	24	22	19	17	14	12	9	7	4


250WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 1450 /min

AQUARIS
MADE IN ITALY



30 – 45 kW	DN250	1100 m³/h	24 m	n ≈ 1450 /min
POWER	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

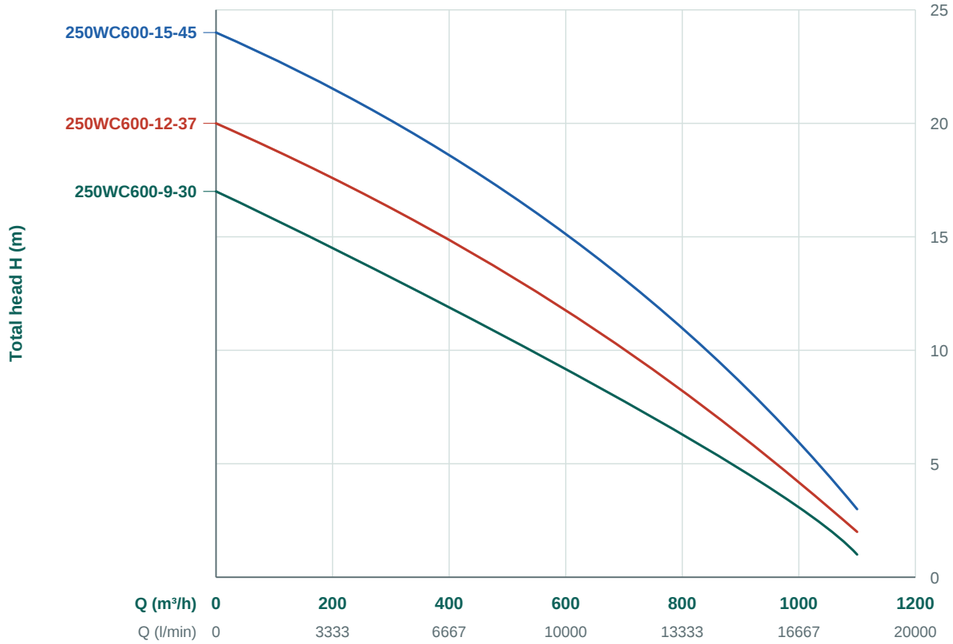

PRODUCT NOMENCLATURE

250	Outlet size (mm)
WC	Model
600	Rated flow (m³/h)
9	Rated head (m)
30	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL		P_2		Q	m³/h	0	100	200	300	400	500	600	700	800	900	1000	1100
3~ 380–415 V / 1~ 220–240 V		kW	HP		l/min	0	1667	3333	5000	6667	8333	10000	11667	13333	15000	16667	18333
250WC600-9-30	3~	30	40			17	16	15	13	12	11	9	8	6	5	3	1
250WC600-12-37	3~	37	50	**H (m)**		20	19	18	17	15	14	12	10	8	6	4	2
250WC600-15-45	3~	45	60			24	23	22	21	19	17	15	13	11	9	6	3


300WC

WC SERIES · SUBMERSIBLE SEWAGE PUMPS WITH CUTTER · 50 Hz · n ≈ 1450 /min

AQUARIS
MADE IN ITALY



45 – 110 kW	DN300	2600 m³/h	34 m	n ≈ 1450 /min
POWER	DISCHARGE	MAX. FLOW RATE	MAX. HEAD	SPEED

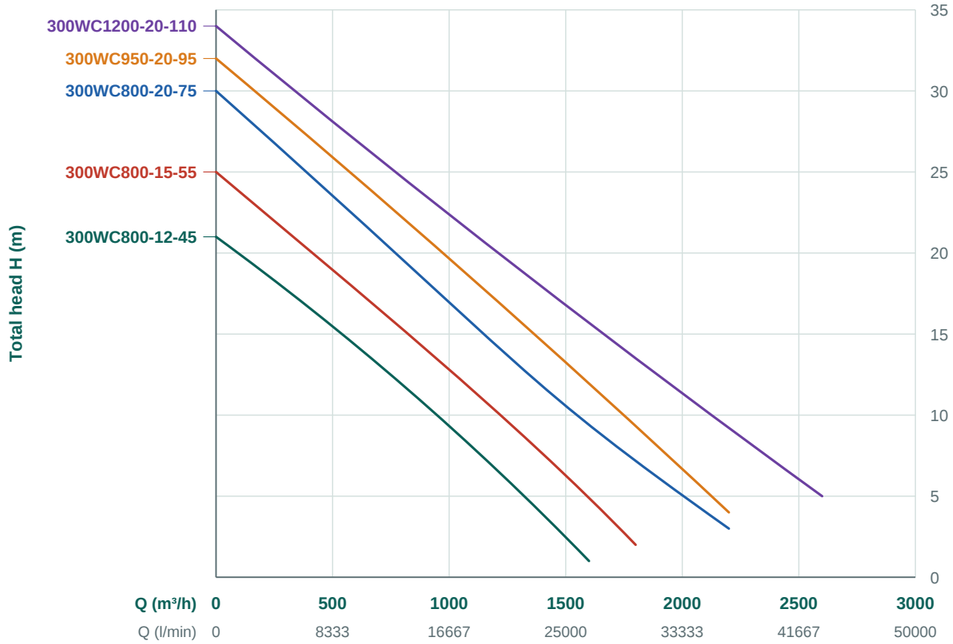

PRODUCT NOMENCLATURE

300	Outlet size (mm)
WC	Model
800	Rated flow (m³/h)
12	Rated head (m)
45	Power (kW)

WC: three-phase 3~ WCD: single-phase 1~

MATERIALS

Diffuser	Cast-iron ASTM NO.30
Impeller	AISI 420S45
Motor external casing	Cast-iron ASTM NO.30
Mechanical seal	Graphite-TC
Shaft	AISI 304 SS-ASTM 5140
Seal lubricant oil	Oil for food machinery and pharmaceutical use

APPLICATIONS

Sewage treatment plants
Industrial draining
Agriculture irrigation

OPERATING CONDITIONS

Maximum fluid temperature up to +40 °C

MOTOR AND PUMP

Rewindable motor
Single-phase: 220–240 V / 50 Hz
Three-phase: 380–415 V / 50 Hz
It can work in water containing fiber
Curve tolerance according to ISO 9906

PERFORMANCE DATA

MODEL		P_2		Q	m³/h	0	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600
3~ 380–415 V / 1~ 220–240 V		kW	HP		l/min	0	3333	6667	10000	13333	16667	20000	23333	26667	30000	33333	36667	40000	43333
300WC800-12-45	3~	45	60			21	19	17	14	12	9	7	4	1					
300WC800-15-55	3~	55	75			25	23	20	18	15	13	10	8	5	2				
300WC800-20-75	3~	75	100	**H (m)**		30	28	25	23	20	17	15	12	9	7	5	3		
300WC950-20-95	3~	95	130			32	30	27	25	22	19	17	14	12	9	7	4		
300WC1200-20-110	3~	110	150			34	32	30	27	25	23	20	18	15	14	11	9	7	5