GB SERIES

AQUARIS MADE IN ITALY

VORTEX AIR PUMP · BLOWER PUMP · RING BLOWER · SINGLE-STAGE AND DOUBLE-STAGE · 50 Hz





SINGLE STAGE

0.25 – 18 kW	up to 1050 m³/h	up to 79 kPa	up to 40 kPa	n ≈ 2800 /min
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED

DOUBLE STAGE

0.55 – 15 kW	up to 560 m³/h	up to 72 kPa	up to 57 kPa
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM

APPLICATIONS

BLOWING	SUCTION
Combustion air supply	Screen-printing vacuum hold-down
Bottle washing and drying	Welding fume and dust extraction
Trim and scrap collection	Textile suction
Air-knife drying	Film hold-down for photoengraving
Air cushion handling	Pneumatic conveying
Compost and wastewater aeration	Printing press suction
Pneumatic capsule transport	Industrial vacuum cleaning
Electroplating bath agitation	Vacuum dewatering
Aquaculture aeration	Book trimming hold-down
Molded-part release	Fabric cutting suction
Powder conveying	Milk-carton filling
Incinerator air supply	Soybean conveying
Exhaust gas dispersion	Vacuum workholding
Vehicle drying	Tunnel ventilation
Printing ink drying	Garment pressing steam extraction

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

POWER SUPPLY

3~ 380–415 V (models from 0.55 kW)

1~ 220–240 V (models up to 2.2 kW)

50 Hz


MODEL CODE **GB-2200S/2** **S** three-phase 3~ (without S: single-phase 1~) **/2** double stage

Construction · operating principle

AQUARIS MADE IN ITALY

GB SERIES · VORTEX AIR PUMP EXPLODED VIEW

OPERATING PRINCIPLE

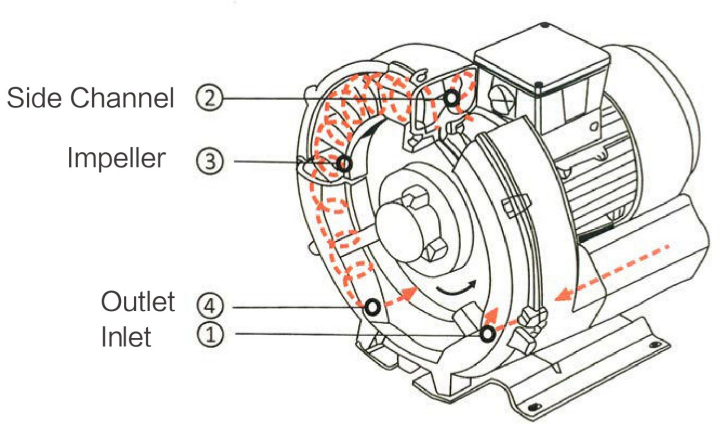


The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

The gas is taken in through inlet 1. As it enters side channel 2, the rotating impeller 3 accelerates the gas in the direction of rotation. Every rotation adds kinetic energy, while centrifugal force moves the gas outward through the impeller blades and raises its pressure.

The pressure rises further along the side channel. The side channel narrows at the rotor, sweeping the gas off the impeller blades and discharging it through outlet silencer 4, where it exits the side channel blower.

EXPLODED VIEW

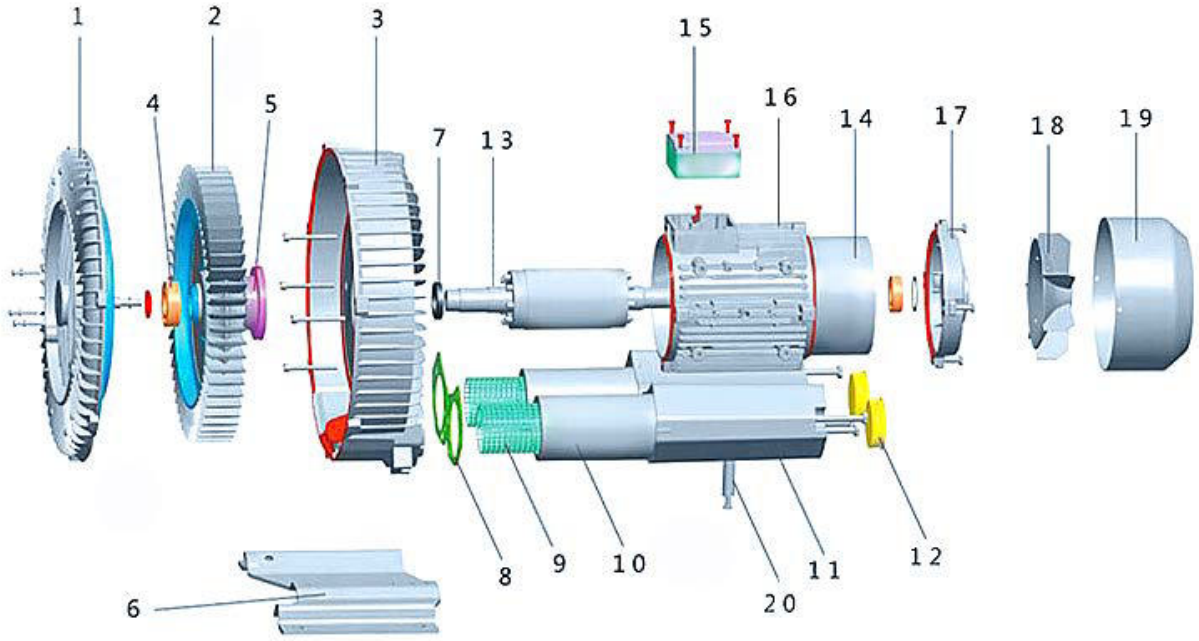

No.	PART	No.	PART
1	Pump cover	11	Silencer pipe
2	Impeller	12	Connector (flange)
3	Pump body	13	Rotor
4	Bearing	14	Motor
5	Bearing seat	15	Terminal box
6	Base plate	16	Motor housing
7	Oil seal	17	Motor end cover
8	Gasket	18	Motor fan
9	Silencer mesh	19	Motor back cover
10	Silencer foam	20	Support tube

GB-250 · GB-370


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS MADE IN ITALY



0.25 – 0.37 kW	up to 60 m³/h	up to 16 kPa	up to 11 kPa	n ≈ 2800 /min	< 56 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

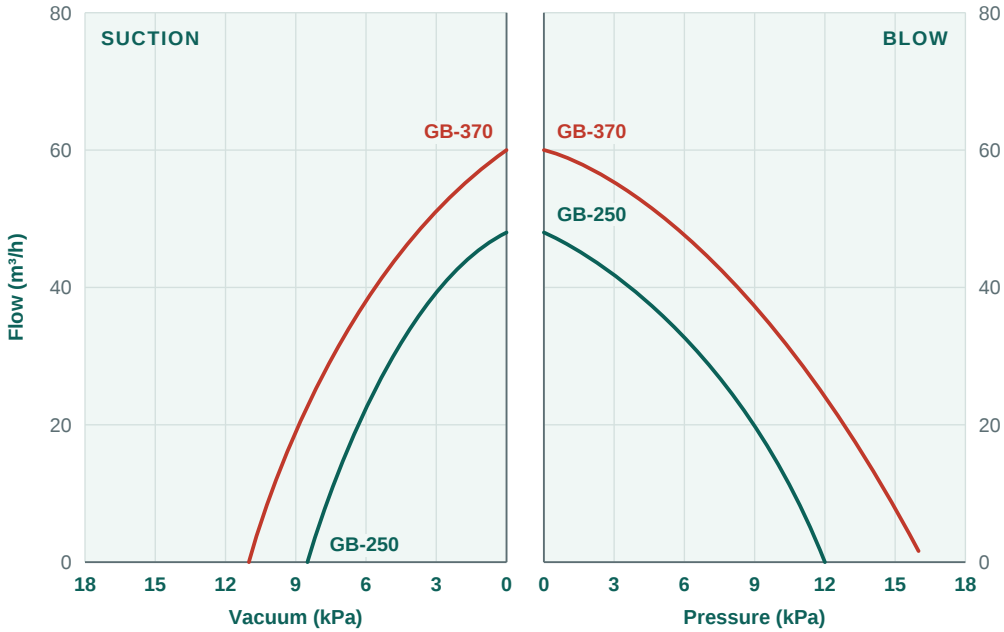

MODEL CODE

GB-250 · GB-370
Single-phase 1~

POWER SUPPLY

1~ 220–240 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 220 V (1~).

TECHNICAL DATA

MODEL 1~ 220–240 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-250	1~	0.25	0.33	2.5	1~	48	12	8.5	< 56
GB-370	1~	0.37	0.5	3.5	1~	60	16	11	< 56

GB-550 · GB-750


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS MADE IN ITALY



0.55 – 0.75 kW	up to 145 m³/h	up to 22 kPa	up to 18 kPa	n ≈ 2800 /min	< 60 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

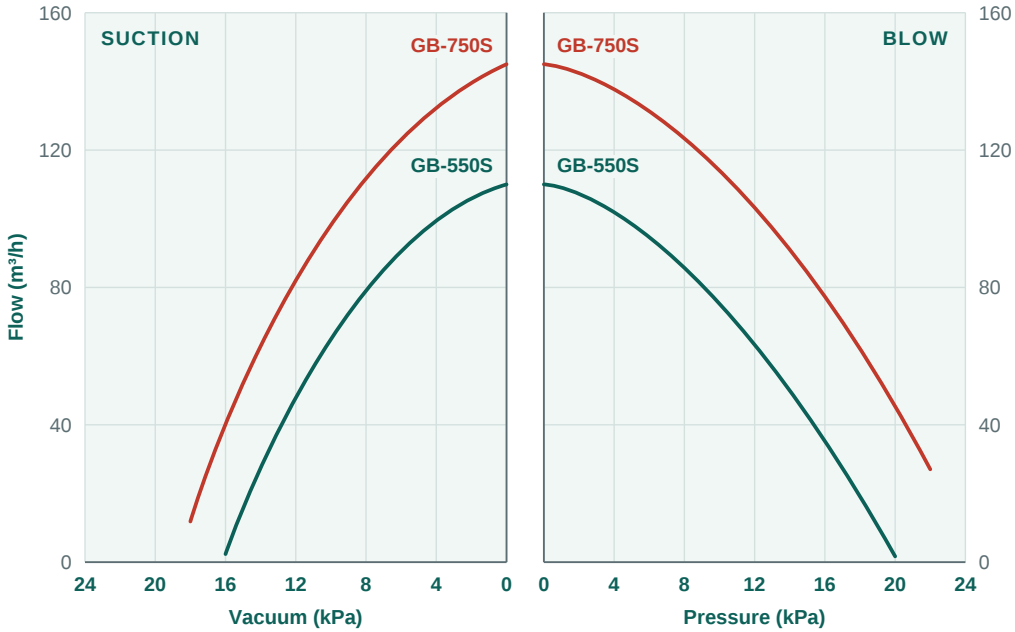

MODEL CODE

GB-550S · GB-750S
Three-phase 3~

GB-550 · GB-750
Single-phase 1~

POWER SUPPLY

3~ 380–415 V
1~ 220–240 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Curves GB-550S / GB-750S also apply to GB-550 / GB-750 (1~).

Rated current at 220 V (1~) and 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-550S **GB-550**	3~ 1~	0.55	0.75	1.45 4.8	3~ 1~	110	20	16	< 60
GB-750S **GB-750**	3~ 1~	0.75	1	1.81 6.3	3~ 1~	145	22	18	< 60

GB-1100 · GB-1500


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS MADE IN ITALY



1.1 – 1.5 kW	up to 220 m³/h	up to 26 kPa	up to 21 kPa	n ≈ 2800 /min	< 60 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

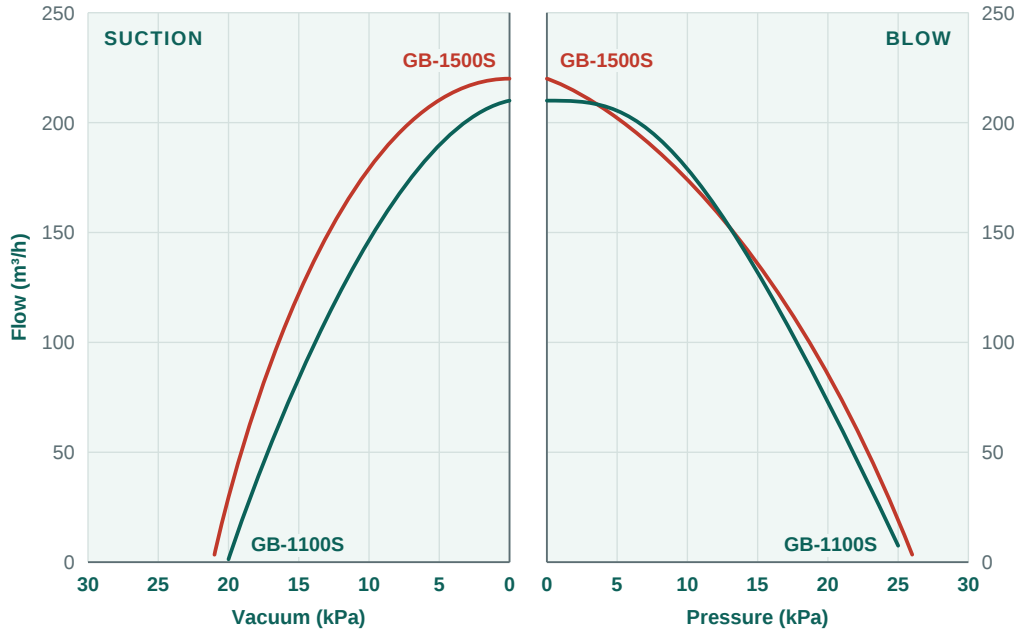

MODEL CODE

GB-1100S · GB-1500S
Three-phase 3~

GB-1100 · GB-1500
Single-phase 1~

POWER SUPPLY

3~ 380–415 V
1~ 220–240 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Curves GB-1100S / GB-1500S also apply to GB-1100 / GB-1500 (1~).

Rated current at 220 V (1~) and 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-1100S	3~	1.1	1.5	2.52	3~	210	25	20	< 60
GB-1100	1~			8.7	1~				
GB-1500S	3~	1.5	2	3.44	3~	220	26	21	< 60
GB-1500	1~			11.8	1~				

GB-2200


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS
MADE IN ITALY



2.2 kW	up to 325 m³/h	up to 36 kPa	up to 28 kPa	n ≈ 2800 /min	< 70 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

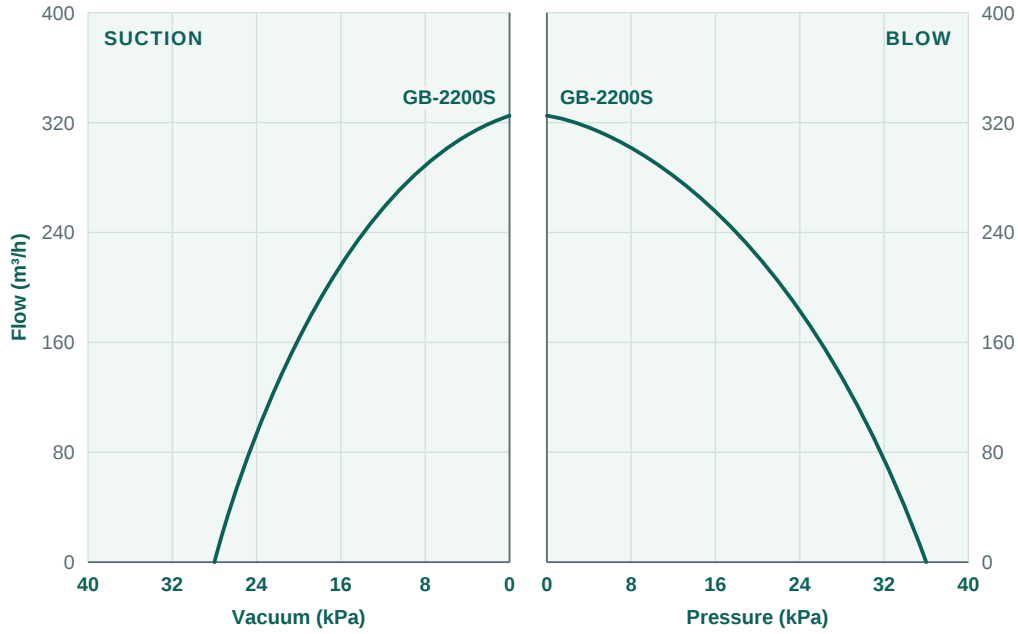

MODEL CODE

GB-2200S
Three-phase 3~

GB-2200
Single-phase 1~

POWER SUPPLY

3~ 380–415 V
1~ 220–240 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Curves GB-2200S also apply to GB-2200 (1~).

Rated current at 220 V (1~) and 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-2200S	3~	2.2	3	4.92	3~	325	36	28	< 70
GB-2200	1~			14.8	1~				

GB-3000 · GB-4000


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS MADE IN ITALY



3 – 4 kW	up to 475 m³/h	up to 38 kPa	up to 30 kPa	n ≈ 2800 /min	< 70 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

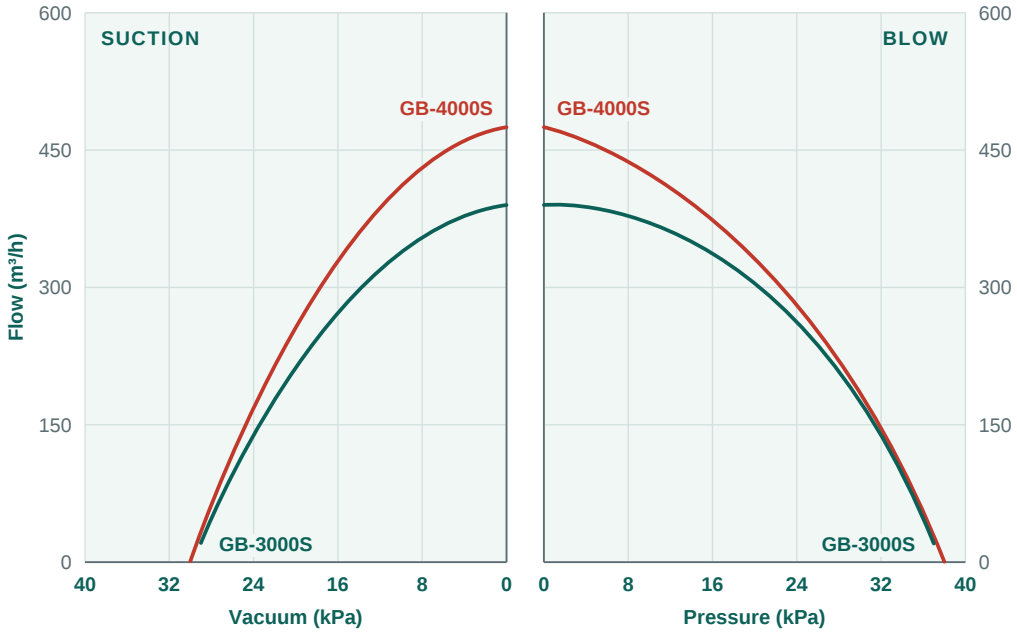

MODEL CODE

GB-3000S · GB-4000S

Three-phase 3~

POWER SUPPLY

3~ 380–415 V

50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-3000S	3~	3	4	6.39	3~	390	37	29	< 70
GB-4000S	3~	4	5.5	8.17	3~	475	38	30	< 70

GB-5500 · GB-7500


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS MADE IN ITALY



5.5 – 7.5 kW	up to 550 m³/h	up to 45 kPa	up to 35 kPa	n ≈ 2800 /min	< 70 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

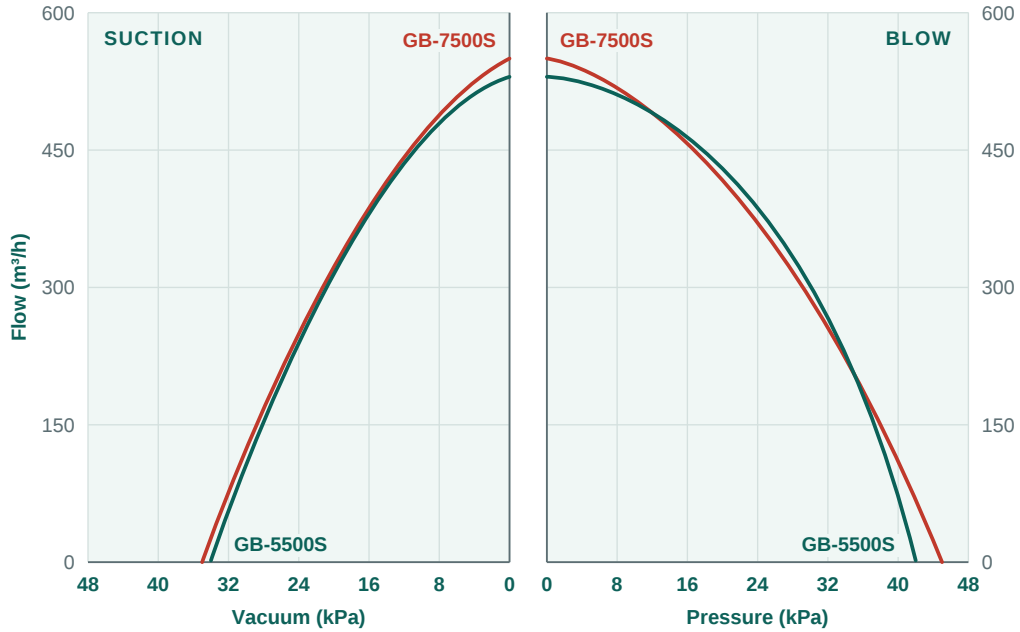

MODEL CODE

GB-5500S · GB-7500S

Three-phase 3~

POWER SUPPLY

3~ 380–415 V

50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-5500S	3~	5.5	7.5	11.1	3~	530	42	34	< 70
GB-7500S	3~	7.5	10	15	3~	550	45	35	< 70

GB-9500 · GB-11000


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS MADE IN ITALY



9.5 – 11 kW	up to 1050 m³/h	up to 75 kPa	up to 40 kPa	n ≈ 2800 /min	< 70 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

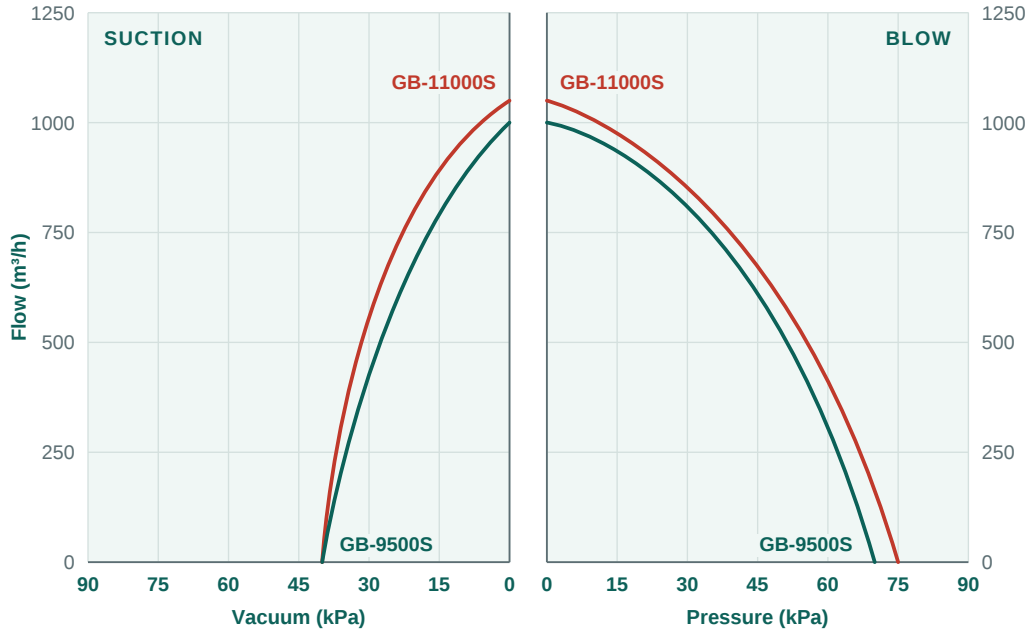

MODEL CODE

GB-9500S · GB-11000S
Three-phase 3~

POWER SUPPLY

3~ 380–415 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-9500S	3~	9.5	12.5	18	3~	1000	70	40	< 70
GB-11000S	3~	11	15	21	3~	1050	75	40	< 70

GB-15000 · GB-18000


GB SERIES · HIGH-PRESSURE VORTEX AIR PUMP · 50 Hz · n ≈ 2800 /min

AQUARIS MADE IN ITALY



15 – 18 kW	up to 1050 m³/h	up to 79 kPa	up to 40 kPa	n ≈ 2800 /min	< 70 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	SPEED	NOISE

PERFORMANCE CURVES

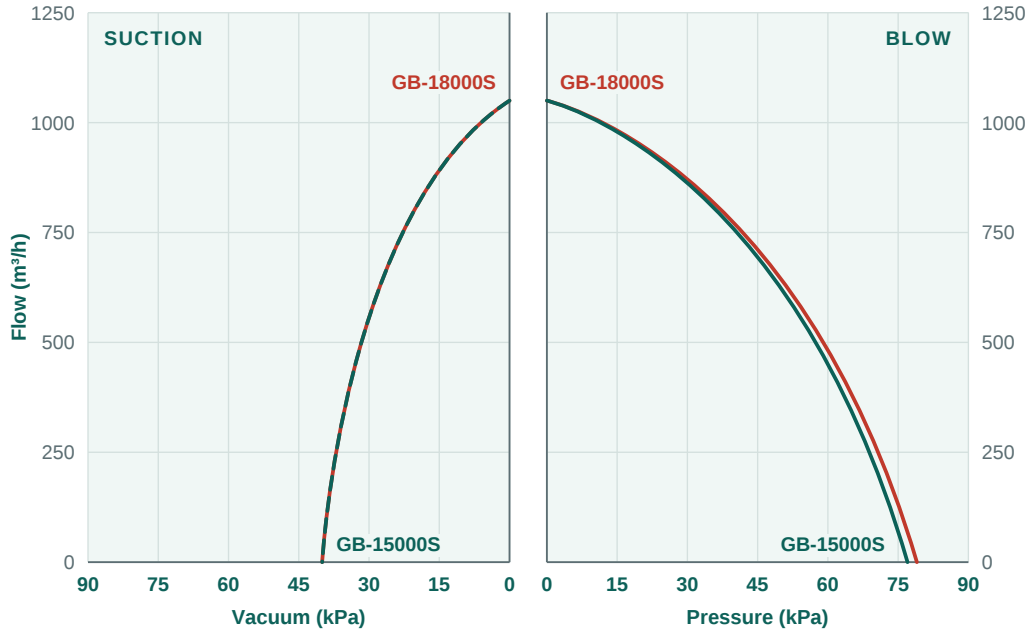

MODEL CODE

GB-15000S · GB-18000S

Three-phase 3~

POWER SUPPLY

3~ 380–415 V

50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-15000S	3~	15	20	28	3~	1050	77	40	< 70
GB-18000S	3~	18	24	34	3~	1050	79	40	< 70

GB-550/2 · GB-750/2


GB SERIES · DOUBLE-STAGE VORTEX AIR PUMP · 50 Hz

AQUARIS MADE IN ITALY



0.55 – 0.75 kW	up to 88 m³/h	up to 31 kPa	up to 25 kPa	< 60 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	NOISE

PERFORMANCE CURVES

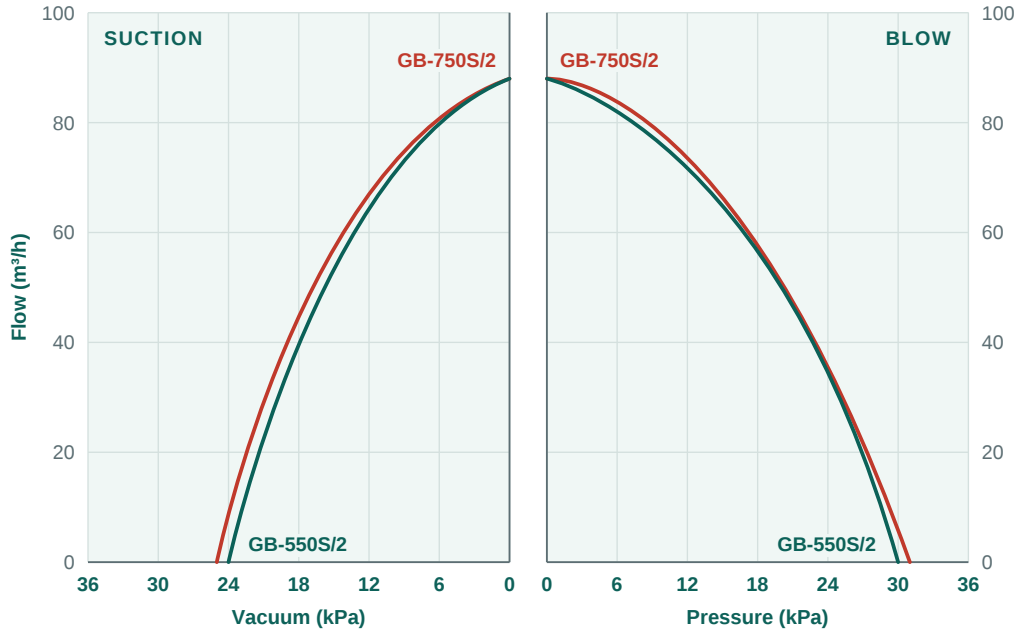

MODEL CODE

GB-550S/2 · GB-750S/2
Three-phase 3~

GB-550/2 · GB-750/2
Single-phase 1~

POWER SUPPLY

3~ 380–415 V
1~ 220–240 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Curves GB-550S/2 / GB-750S/2 also apply to GB-550/2 / GB-750/2 (1~).

Rated current at 220 V (1~) and 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-550S/2	3~	0.55	0.75	2.2	3~	88	30	24	< 60
GB-550/2	1~			4.8	1~				
GB-750S/2	3~	0.75	1	2.4	3~	88	31	25	< 60
GB-750/2	1~			6.1	1~				

GB-1100/2 · GB-1500/2


GB SERIES · DOUBLE-STAGE VORTEX AIR PUMP · 50 Hz

AQUARIS MADE IN ITALY



1.1 – 1.5 kW	up to 145 m³/h	up to 38 kPa	up to 31 kPa	< 60 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	NOISE

PERFORMANCE CURVES

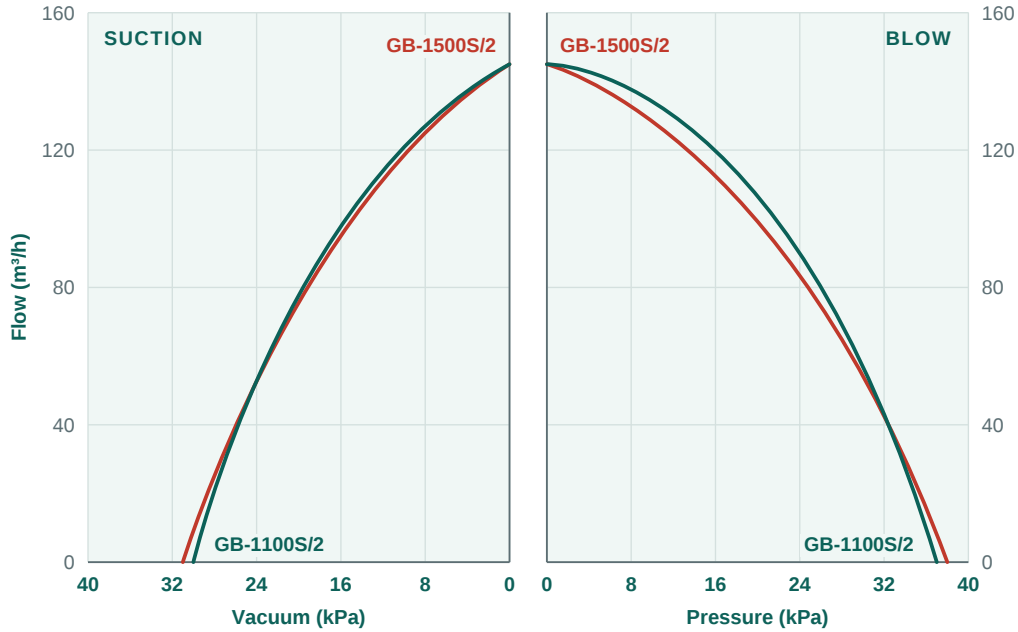

MODEL CODE

GB-1100S/2 · GB-1500S/2
Three-phase 3~

GB-1100/2 · GB-1500/2
Single-phase 1~

POWER SUPPLY

3~ 380–415 V
1~ 220–240 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Curves GB-1100S/2 / GB-1500S/2 also apply to GB-1100/2 / GB-1500/2 (1~).

Rated current at 220 V (1~) and 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-1100S/2	3~	1.1	1.5	3.3	3~	145	37	30	< 60
GB-1100/2	1~			8.4	1~				
GB-1500S/2	3~	1.5	2	4.3	3~	145	38	31	< 60
GB-1500/2	1~			11	1~				

GB-2200/2 · GB-3000/2


GB SERIES · DOUBLE-STAGE VORTEX AIR PUMP · 50 Hz

AQUARIS MADE IN ITALY



2.2 – 3 kW	up to 220 m³/h	up to 44 kPa	up to 43 kPa	< 70 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	NOISE

PERFORMANCE CURVES

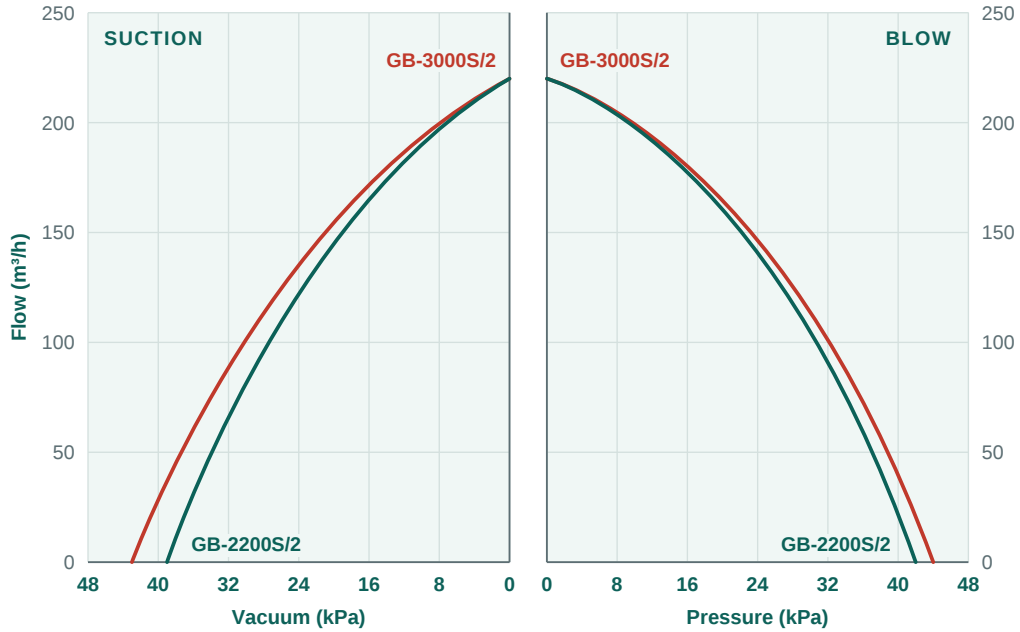

MODEL CODE

GB-2200S/2 · GB-3000S/2
Three-phase 3~

GB-2200/2
Single-phase 1~

POWER SUPPLY

3~ 380–415 V
1~ 220–240 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Curves GB-2200S/2 also apply to GB-2200/2 (1~).

Rated current at 220 V (1~) and 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V / 1~ 220–240 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-2200S/2 **GB-2200/2**	3~ 1~	2.2	3	5.6 15.5	3~ 1~	220	42	39	< 70
GB-3000S/2	3~	3	4	7.2	3~	220	44	43	< 70

GB-4000/2 · GB-5500/2


GB SERIES · DOUBLE-STAGE VORTEX AIR PUMP · 50 Hz

AQUARIS MADE IN ITALY



4 – 5.5 kW	up to 325 m³/h	up to 63 kPa	up to 48 kPa	< 70 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	NOISE

PERFORMANCE CURVES

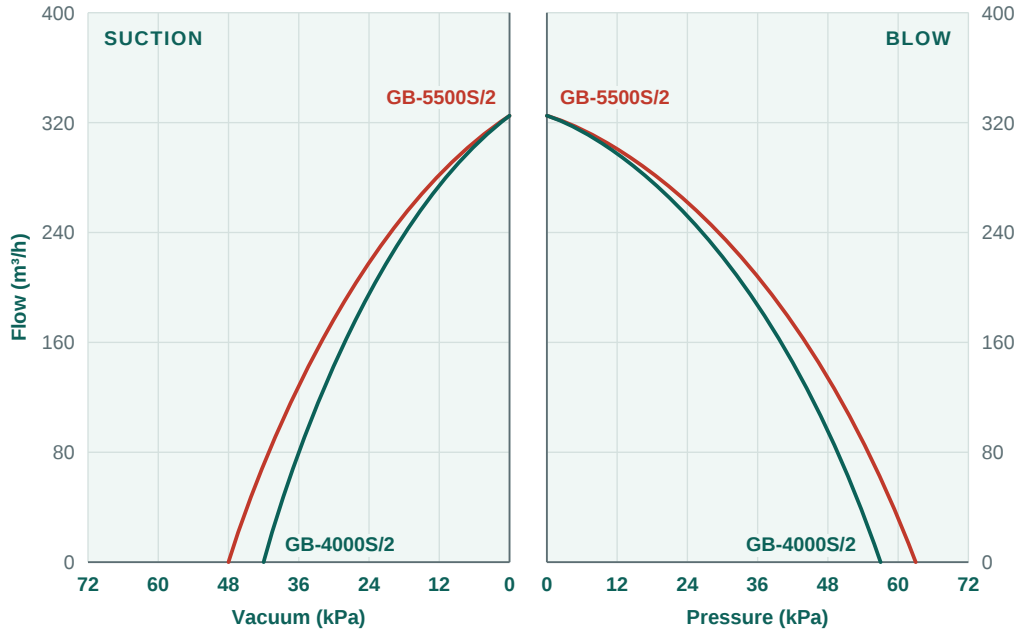

MODEL CODE

GB-4000S/2 · GB-5500S/2

Three-phase 3~

POWER SUPPLY

3~ 380–415 V

50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-4000S/2	3~	4	5.5	9	3~	325	57	42	< 70
GB-5500S/2	3~	5.5	7.5	13.3	3~	325	63	48	< 70

GB-7500/2 · GB-9500/2


GB SERIES · DOUBLE-STAGE VORTEX AIR PUMP · 50 Hz

AQUARIS MADE IN ITALY



7.5 – 9.5 kW	up to 520 m³/h	up to 70 kPa	up to 55 kPa	< 80 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	NOISE

PERFORMANCE CURVES

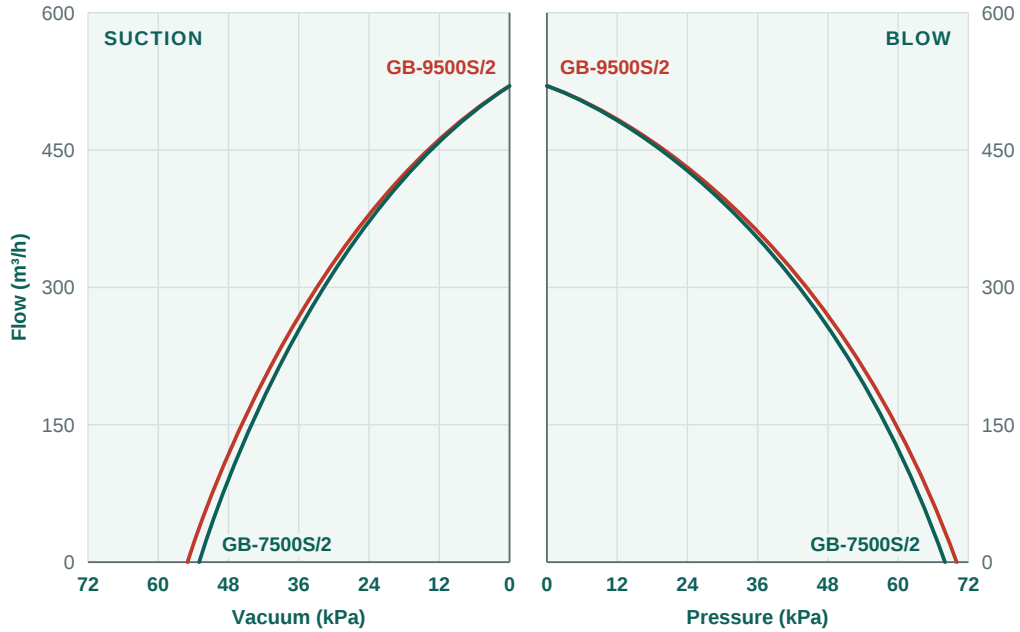

MODEL CODE

GB-7500S/2 · GB-9500S/2
Three-phase 3~

POWER SUPPLY

3~ 380–415 V
50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-7500S/2	3~	7.5	10	16.7	3~	520	68	53	< 80
GB-9500S/2	3~	9.5	12.5	17.3	3~	520	70	55	< 80

GB-11000/2 · GB-15000/2


GB SERIES · DOUBLE-STAGE VORTEX AIR PUMP · 50 Hz

AQUARIS MADE IN ITALY



11 – 15 kW	up to 560 m³/h	up to 72 kPa	up to 57 kPa	< 80 dB
POWER	MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	NOISE

PERFORMANCE CURVES

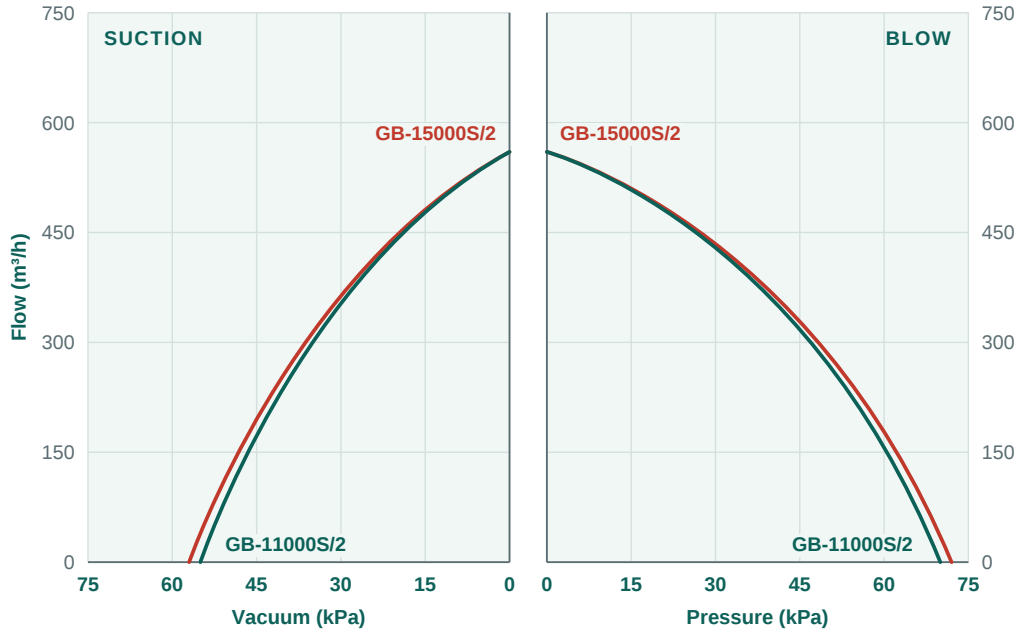

MODEL CODE

GB-11000S/2 · GB-15000S/2

Three-phase 3~

POWER SUPPLY

3~ 380–415 V

50 Hz

OPERATING PRINCIPLE

The impellers are mounted directly on the motor shaft for compression without contact or friction. Maximum operational reliability, even at high differential pressure, is ensured by bearings located outside the compression chamber.

NOTES

Performance curves of the GB Series vortex air pumps are for reference only and are not a basis for testing.

Rated current at 380 V (3~).

TECHNICAL DATA

MODEL 3~ 380–415 V		POWER kW	 HP	RATED CURRENT A		MAX. FLOW m³/h	MAX. PRESSURE kPa	MAX. VACUUM kPa	NOISE dB
GB-11000S/2	3~	11	15	21.5	3~	560	70	55	< 80
GB-15000S/2	3~	15	20	32.5	3~	560	72	57	< 80

Fittings

GB SERIES · VORTEX AIR PUMP FITTINGS

AQUARIS
MADE IN ITALY



CARTRIDGE FILTER



MESH FILTER CAP



RELIEF VALVE



DISTRIBUTOR



SILENCER



FILTER HOUSING



AIR KNIFE



FILTER + PIPE



PIPE



ELBOW PIPE