3M SERIES

3M

Stainless steel standard pump



RANGE CHARACTERISTICS

Power	**1.1–37 kW**
Discharge	**DN 32–80 mm**
Max. flow rate	**240 m³/h**
Max. head	**72 m**
Speed	**n ≈ 2900 /min**
Motor	**3~ 380–415 V**

PRODUCT NOMENCLATURE

Example: 3M 32-200/5.5

3M	32	200	5.5
Stainless steel standard pump	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

PRODUCT OVERVIEW & MATERIALS

50 Hz | n ≈ 2900 /min

Redpump Italy Standard

DESCRIPTION

- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

APPLICATIONS

- Clean water
- Domestic
- Civil
- Industrial

RANGE OVERVIEW

SIZE	DN suction × discharge, mm	POWER kW	MAX. FLOW m³/h	MAX. HEAD m	MODELS
3M 32	50 × 32	1.1–5.5	24	70.5	6
3M 40	65 × 40	1.5–11	42	72	7
3M 50	65 × 50	2.2–15	72	72	8
3M 65	80 × 65	4–22	138	67	8
3M 80	100 × 80	11–37	240	66	6

CONSTRUCTION MATERIALS

COMPONENT	MATERIAL
Pump casing	SS304
Impeller	SS304
Mechanical seal	SiC/Carbon/SS304
Baffle plate	SS304
O-ring	Rubber
Connection	Cast iron
Shaft	SS304
Reinforced seal	Rubber
Bearing	Ball bearing
Wound stator/rotor	Silicon/Copper
Motor housing	Aluminum
Support foot	Plastic
Back cover	Cast iron
Reinforced seal	Rubber
Fan cover	Aluminum
Fan	Plastic
Through bolt	Steel
Terminal box	Aluminum
Terminal board	Plastic
Impeller key	Iron
Water deflector	Rubber
Impeller nut	Galvanized steel
Connection bolt	Steel

3M SERIES

3M 32

Stainless steel standard pump



RANGE CHARACTERISTICS

Power	**1.1–5.5 kW**
Suction × discharge	**DN 50 × 32 mm**
Max. flow rate	**24 m³/h**
Max. head	**70.5 m**
Speed	**n ≈ 2900 /min**
Motor	**3~ 380–415 V**

PRODUCT NOMENCLATURE

Example: 3M 32-200/5.5

3M	32	200	5.5
Stainless steel standard pump	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

OPERATING LIMITS


- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

APPLICATIONS

Clean water · Domestic · Civil · Industrial

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

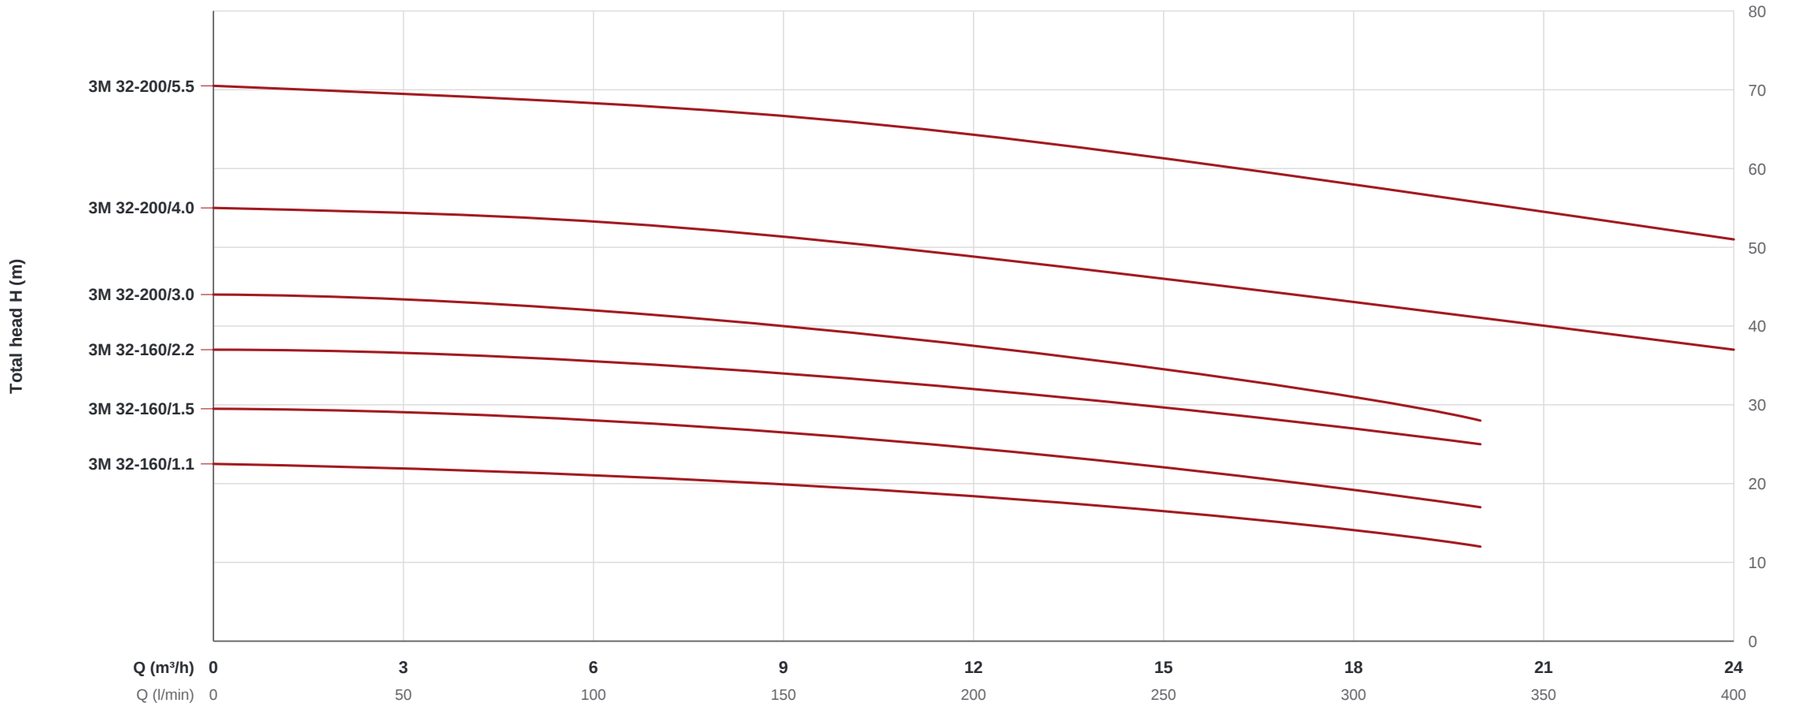

PERFORMANCE DATA

THREE-PHASE 3~ 380–415 V

MODEL	DN mm	P_2 kW	P_2 HP	Q	m³/h / l/min	0 / 0	9 / 150	12 / 200	18 / 300	20 / 333	24 / 400
3M 32-160 · NOMINAL IMPELLER SIZE 160 mm											
3M 32-160/1.1	50x32	1.1	1.5			22.5	19.9	18.4	14.1	12	–
3M 32-160/1.5	50x32	1.5	2	**H (m)**		29.5	26.5	24.5	19.2	17	–
3M 32-160/2.2	50x32	2.2	3			37	34	32	27	25	–
3M 32-200 · NOMINAL IMPELLER SIZE 200 mm											
3M 32-200/3.0	50x32	3	4			44	40	37.5	31	28	–
3M 32-200/4.0	50x32	4	5.5	**H (m)**		55	52	49.5	43.5	40.5	37
3M 32-200/5.5	50x32	5.5	7.5			70.5	67.5	65	58.5	55	51

DESCRIPTION

- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

MATERIALS

Pump casing	SS304
Impeller	SS304
Mechanical seal	SiC/Carbon/SS304
Baffle plate	SS304
O-ring	Rubber
Connection	Cast iron
Shaft	SS304
Reinforced seal	Rubber

3M SERIES

3M 40

Stainless steel standard pump



RANGE CHARACTERISTICS

Power	**1.5–11 kW**
Suction × discharge	**DN 65 × 40 mm**
Max. flow rate	**42 m³/h**
Max. head	**72 m**
Speed	**n ≈ 2900 /min**
Motor	**3~ 380–415 V**

PRODUCT NOMENCLATURE

Example: 3M 40-200/11.0

3M	40	200	11.0
Stainless steel standard pump	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

OPERATING LIMITS


- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

APPLICATIONS

Clean water · Domestic · Civil · Industrial

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

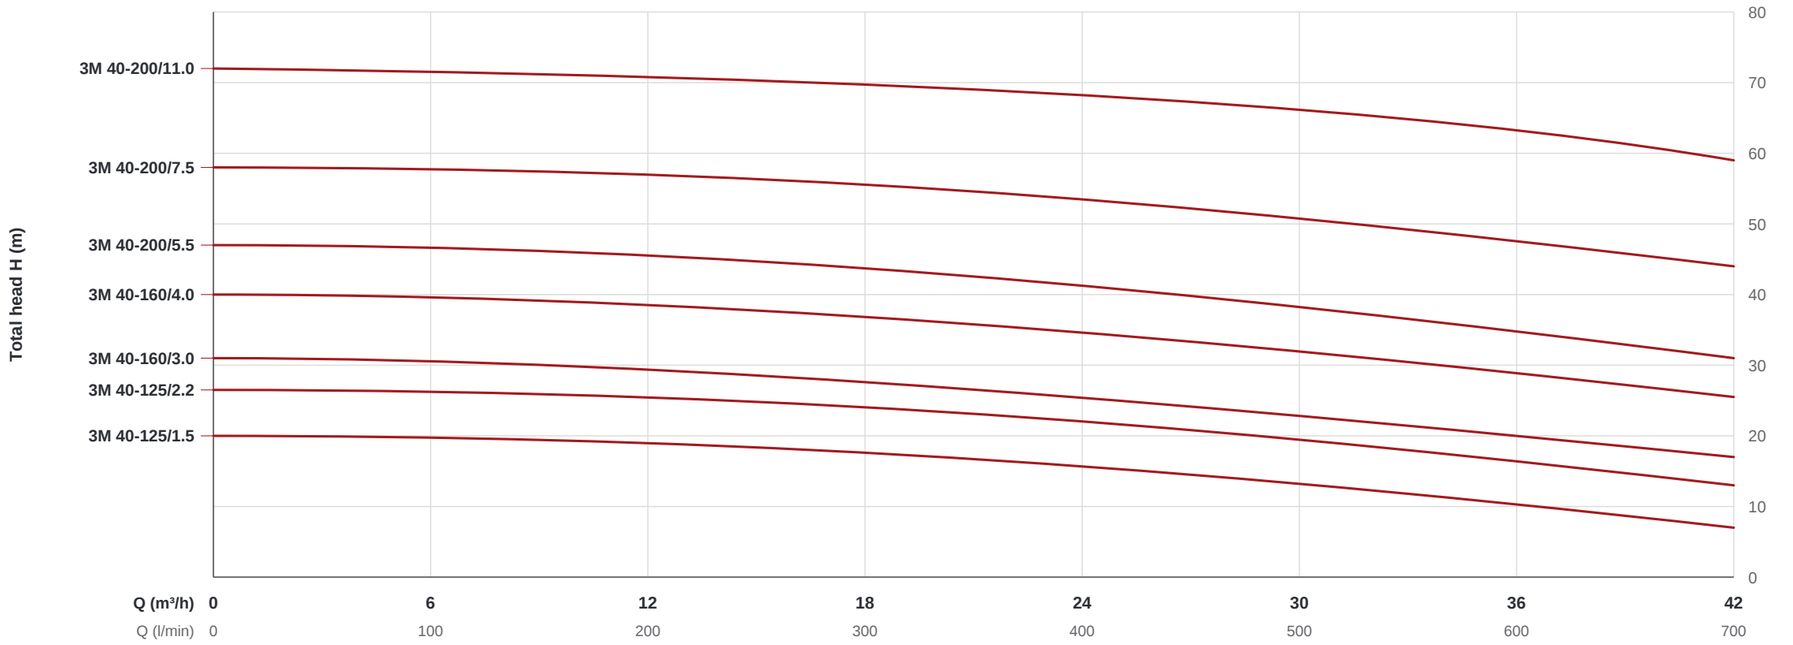

PERFORMANCE DATA

THREE-PHASE 3~ 380–415 V

MODEL	DN mm	P_2 kW	HP	Q m³/h / l/min	0 / 0	12 / 200	18 / 300	20 / 333	24 / 400	36 / 600	42 / 700
3M 40-125 · NOMINAL IMPELLER SIZE 125 mm											
3M 40-125/1.5	65x40	1.5	2	H (m)	20	19	17.6	17	15.7	10.3	7
3M 40-125/2.2	65x40	2.2	3		26.5	25.5	24	23.5	22	16.4	13
3M 40-160 · NOMINAL IMPELLER SIZE 160 mm											
3M 40-160/3.0	65x40	3	4	H (m)	31	29.5	27.5	27	25.5	20	17
3M 40-160/4.0	65x40	4	5.5		40	38.5	37	36	34.5	29	25.5
3M 40-200 · NOMINAL IMPELLER SIZE 200 mm											
3M 40-200/5.5	65x40	5.5	7.5	H (m)	47	45.5	44	43	41	35	31
3M 40-200/7.5	65x40	7.5	10		58	57	55.5	55	53.5	47.5	44
3M 40-200/11.0	65x40	11	15		72	71	70	69	68.5	63	59

DESCRIPTION

- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

MATERIALS

Pump casing	SS304
Impeller	SS304
Mechanical seal	SiC/Carbon/SS304
Baffle plate	SS304
O-ring	Rubber
Connection	Cast iron
Shaft	SS304
Reinforced seal	Rubber

3M SERIES

3M 50

Stainless steel standard pump



RANGE CHARACTERISTICS

Power	**2.2–15 kW**
Suction × discharge	**DN 65 × 50 mm**
Max. flow rate	**72 m³/h**
Max. head	**72 m**
Speed	**n ≈ 2900 /min**
Motor	**3~ 380–415 V**

PRODUCT NOMENCLATURE

Example: 3M 50-200/15.0

3M	50	200	15.0
Stainless steel standard pump	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

OPERATING LIMITS


- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

APPLICATIONS

Clean water · Domestic · Civil · Industrial

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

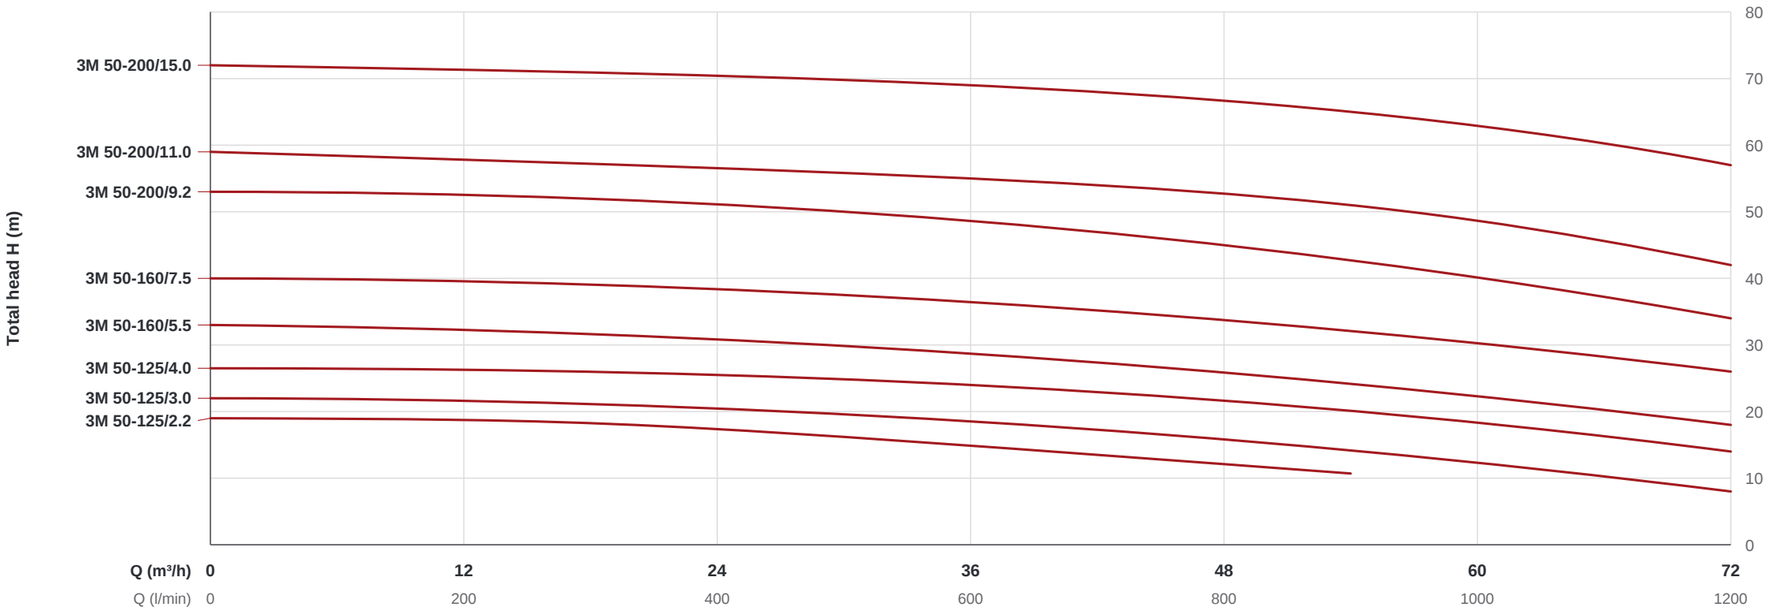

PERFORMANCE DATA

THREE-PHASE 3~ 380–415 V

MODEL	DN mm	P_2 kW	P_2 HP	Q	m³/h / l/min	0 / 0	24 / 400	36 / 600	42 / 700	54 / 900	72 / 1200
3M 50-125 · NOMINAL IMPELLER SIZE 125 mm											
3M 50-125/2.2	65x50	2.2	3	H (m)		19	17.5	14.9	13.4	10.7	–
3M 50-125/3.0	65x50	3	4			22	20.5	18.4	17	14.4	8
3M 50-125/4.0	65x50	4	5.5			26.5	26	24	22.5	20.5	14
3M 50-160 · NOMINAL IMPELLER SIZE 160 mm											
3M 50-160/5.5	65x50	5.5	7.5	H (m)		33	31	28.5	27	24.5	18
3M 50-160/7.5	65x50	7.5	10			40	38.5	36	35	32.5	26
3M 50-200 · NOMINAL IMPELLER SIZE 200 mm											
3M 50-200/9.2	65x50	9.2	12.5	H (m)		53	51	49	47.5	44.5	34
3M 50-200/11.0	65x50	11	15			59	57	55	54	51	42
3M 50-200/15.0	65x50	15	20			72	70	69	68	65	57

DESCRIPTION

- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

MATERIALS

Pump casing	SS304
Impeller	SS304
Mechanical seal	SiC/Carbon/SS304
Baffle plate	SS304
O-ring	Rubber
Connection	Cast iron
Shaft	SS304
Reinforced seal	Rubber

3M SERIES

3M 65

Stainless steel standard pump



RANGE CHARACTERISTICS

Power	**4–22 kW**
Suction × discharge	**DN 80 × 65 mm**
Max. flow rate	**138 m³/h**
Max. head	**67 m**
Speed	**n ≈ 2900 /min**
Motor	**3~ 380–415 V**

PRODUCT NOMENCLATURE

Example: 3M 65-200/22.0

3M	65	200	22.0
Stainless steel standard pump	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

OPERATING LIMITS


- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

APPLICATIONS

Clean water · Domestic · Civil · Industrial

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

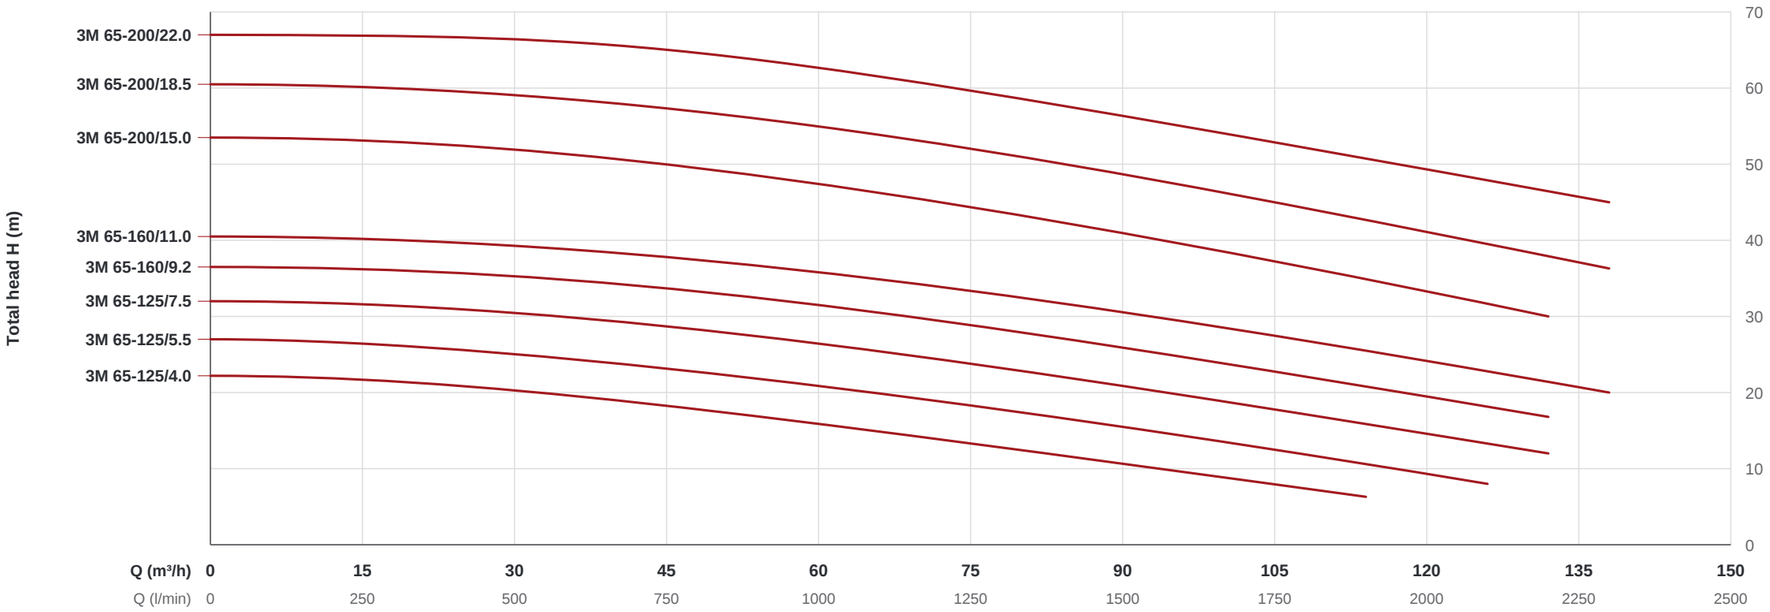

PERFORMANCE DATA

THREE-PHASE 3~ 380–415 V

MODEL	DN mm	P_2 kW	P_2 HP	Q	m³/h	0	36	42	54	72	114	126	132	138
					l/min	0	600	700	900	1200	1900	2100	2200	2300
3M 65-125 · NOMINAL IMPELLER SIZE 125 mm														
3M 65-125/4.0	80x65	4	5.5			22.2	19.8	19	17.3	13.5	6.3	–	–	–
3M 65-125/5.5	80x65	5.5	7.5	**H (m)**		27	24.3	24	22.2	18.5	10.8	8	–	–
3M 65-125/7.5	80x65	7.5	10			32	29.8	29.5	27.8	24	16.1	13.4	12	–
3M 65-160 · NOMINAL IMPELLER SIZE 160 mm														
3M 65-160/9.2	80x65	9.2	12.5	**H (m)**		36.5	34.7	34.5	32.8	29	21.1	18.3	16.8	–
3M 65-160/11.0	80x65	11	15			40.5	38.8	38.5	37.1	33.5	25.8	23	21.5	20
3M 65-200 · NOMINAL IMPELLER SIZE 200 mm														
3M 65-200/15.0	80x65	15	20			53.5	51.2	51	49	44.5	35.3	31.8	30	–
3M 65-200/18.5	80x65	18.5	25	**H (m)**		60.5	58.6	58.5	56.5	52	43	39.7	38	36.3
3M 65-200/22.0	80x65	22	30			67	66	65.5	64	60	51	48	46.5	45

DESCRIPTION

- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

MATERIALS

Pump casing	SS304
Impeller	SS304
Mechanical seal	SiC/Carbon/SS304
Baffle plate	SS304
O-ring	Rubber
Connection	Cast iron
Shaft	SS304
Reinforced seal	Rubber

3M SERIES

3M 80

Stainless steel standard pump



RANGE CHARACTERISTICS

Power	**11–37 kW**
Suction × discharge	**DN 100 × 80 mm**
Max. flow rate	**240 m³/h**
Max. head	**66 m**
Speed	**n ≈ 2900 /min**
Motor	**3~ 380–415 V**

PRODUCT NOMENCLATURE

Example: 3M 80-200/37.0

3M	80	200	37.0
Stainless steel standard pump	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

OPERATING LIMITS


- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

APPLICATIONS

Clean water · Domestic · Civil · Industrial

PERFORMANCE & TECHNICAL DATA

50 Hz | n ≈ 2900 /min

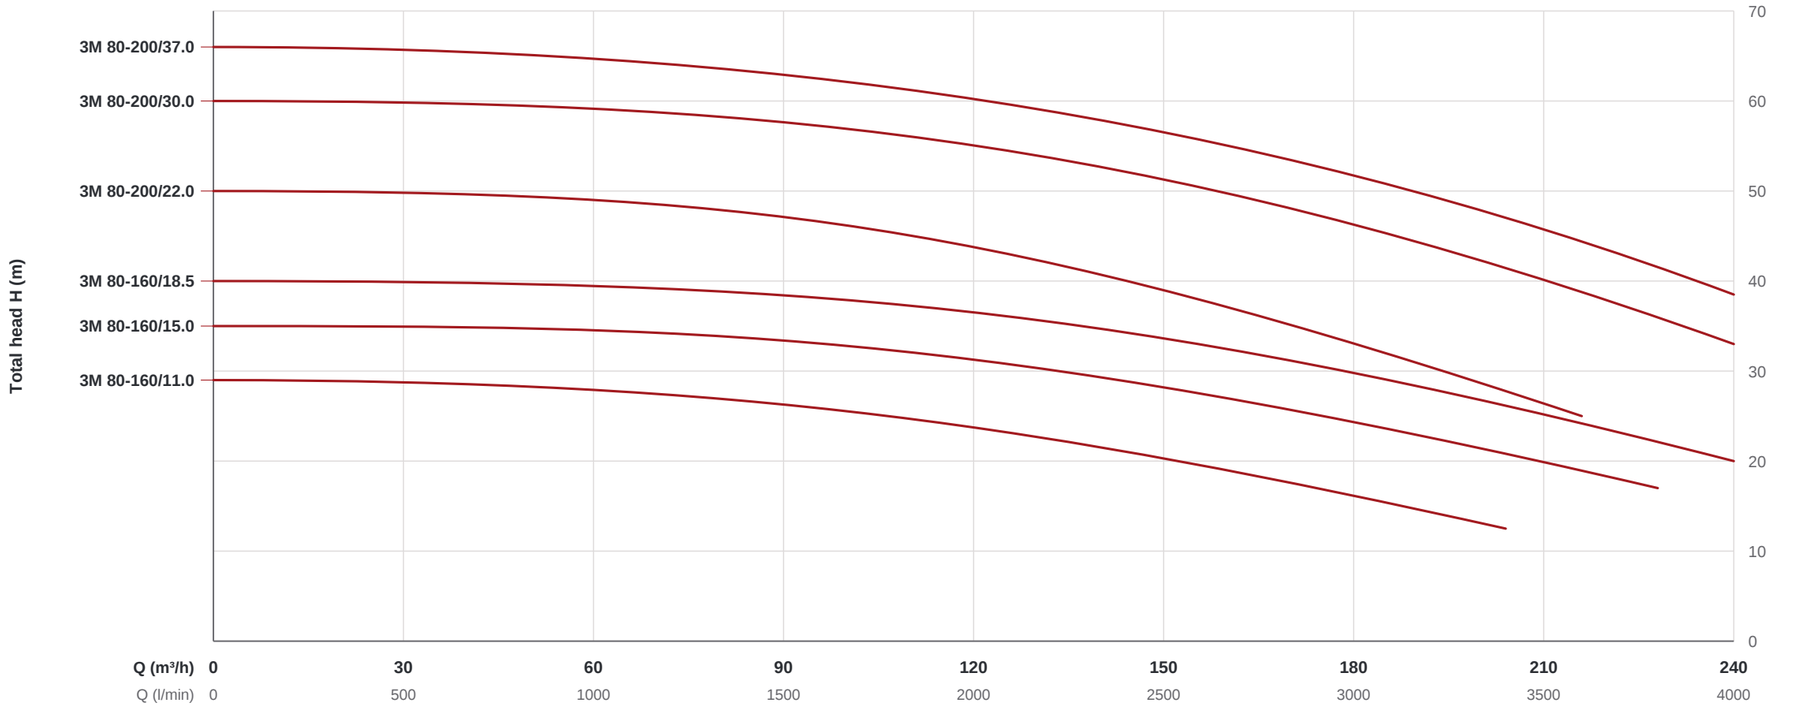

PERFORMANCE DATA

THREE-PHASE 3~ 380–415 V

MODEL	DN mm	P_2 kW	P_2 HP	Q	m³/h	0	72	114	126	132	138	150	204	216	228	240
					l/min	0	1200	1900	2100	2200	2300	2500	3400	3600	3800	4000
3M 80-160 · NOMINAL IMPELLER SIZE 160 mm																
3M 80-160/11.0	100x80	11	15			29	27.5	24.2	23	22.4	21.8	20.4	12.5	–	–	–
3M 80-160/15.0	100x80	15	20	**H (m)**		35	34.5	31.5	30.5	30	29.4	28.1	21	19.1	17	–
3M 80-160/18.5	100x80	18.5	25			40	39.5	36.7	35.7	35.2	34.7	33.5	26.4	24.4	22.3	20
3M 80-200 · NOMINAL IMPELLER SIZE 200 mm																
3M 80-200/22.0	100x80	22	30			50	48.5	44.5	43	42	41	39	27.8	25	–	–
3M 80-200/30.0	100x80	30	40	**H (m)**		60	59	56	54.5	54	53	51	41.5	39	36.1	33
3M 80-200/37.0	100x80	37	50			66	64	61	59.5	59	58	56.5	47	44.5	41.5	38.5

DESCRIPTION

- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

MATERIALS

Pump casing	SS304
Impeller	SS304
Mechanical seal	SiC/Carbon/SS304
Baffle plate	SS304
O-ring	Rubber
Connection	Cast iron
Shaft	SS304
Reinforced seal	Rubber


3M SERIES

3M

Stainless steel standard pump

BACK PULL-OUT DESIGN

The motor, coupling, cantilever support and impeller can be removed without disturbing the pump casing or removing the pipes.

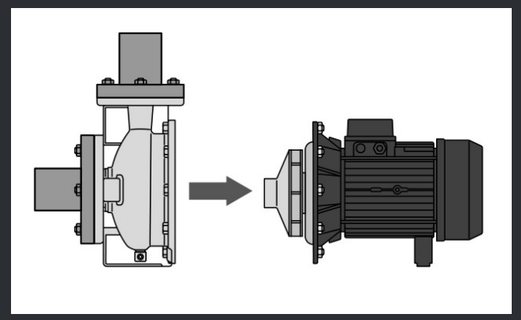


UNITS

Dimensions in mm

Three-phase 3~ 380–415 V

DIMENSIONS

50 Hz | n ≈ 2900 /min

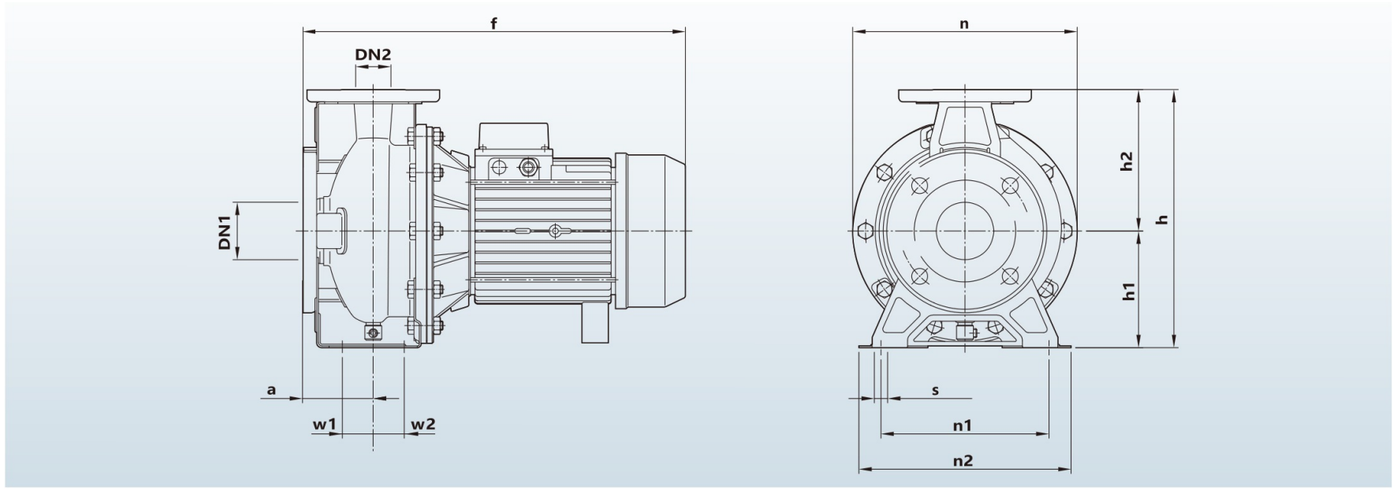

DIMENSIONS

MODEL	DN1	DN2	a	f	h	h1	h2	n	n1	n2	w1	w2	s
3M 32 · DN 50 × 32 mm													
3M 32-160/1.1	50	32	100	493	306	150	156	235	148	175	60	31	15
3M 32-160/1.5	50	32	100	493	306	150	156	235	148	175	60	31	15
3M 32-160/2.2	50	32	100	493	306	150	156	235	148	175	60	31	15
3M 32-200/3.0	50	32	100	538	306	150	156	235	148	175	60	31	15
3M 32-200/4.0	50	32	100	538	306	150	156	235	148	175	60	31	15
3M 32-200/5.5	50	32	100	538	306	150	156	235	148	175	60	31	15
3M 40 · DN 65 × 40 mm													
3M 40-125/1.5	65	40	100	493	306	150	156	235	148	175	60	31	15
3M 40-125/2.2	65	40	100	493	306	150	156	235	148	175	60	31	15
3M 40-160/3.0	65	40	105	542	340	160	180	278	148	175	60	31	15
3M 40-160/4.0	65	40	105	542	340	160	180	278	148	175	60	31	15
3M 40-200/5.5	65	40	105	584	340	160	180	278	148	175	60	31	15
3M 40-200/7.5	65	40	105	584	340	160	180	278	148	175	60	31	15
3M 40-200/11.0	65	40	105	650	340	160	180	235	148	175	60	31	15
3M 50 · DN 65 × 50 mm													
3M 50-125/2.2	65	50	100	428	340	160	180	235	148	175	60	31	15
3M 50-125/3.0	65	50	100	493	340	160	180	278	148	175	60	31	15
3M 50-125/4.0	65	50	100	493	340	160	180	278	148	175	60	31	15
3M 50-160/5.5	65	50	105	584	340	160	180	278	148	175	60	31	15
3M 50-160/7.5	65	50	105	584	340	160	180	278	148	175	60	31	15
3M 50-200/9.2	65	50	105	650	365	185	180	278	148	175	60	31	15
3M 50-200/11.0	65	50	105	650	365	185	180	278	148	175	60	31	15
3M 50-200/15.0	65	50	105	768	365	185	180	278	148	175	60	31	15

MODEL	DN1	DN2	a	f	h	h1	h2	n	n1	n2	w1	w2	s
3M 65 · DN 80 × 65 mm													
3M 65-125/4.0	80	65	100	584	340	160	180	278	148	175	60	31	15
3M 65-125/5.5	80	65	100	584	340	160	180	278	148	175	60	31	15
3M 65-125/7.5	80	65	100	584	340	160	180	278	148	175	60	31	15
3M 65-160/9.2	80	65	113	675	345	160	185	278	148	175	60	31	15
3M 65-160/11.0	80	65	113	675	345	160	185	278	148	175	60	31	15
3M 65-200/15.0	80	65	113	793	370	185	185	278	148	175	60	31	15
3M 65-200/18.5	80	65	113	793	370	185	185	278	148	175	60	31	15
3M 65-200/22.0	80	65	113	793	370	185	185	278	148	175	60	31	15
3M 80 · DN 100 × 80 mm													
3M 80-160/11.0	100	80	125	700	400	180	220	278	148	175	60	31	15
3M 80-160/15.0	100	80	125	870	400	180	220	278	148	175	60	31	15
3M 80-160/18.5	100	80	125	870	400	180	220	278	148	175	60	31	15
3M 80-200/22.0	100	80	125	915	450	200	250	278	148	175	60	31	15
3M 80-200/30.0	100	80	125	985	450	200	250	278	148	175	60	31	15
3M 80-200/37.0	100	80	125	985	450	200	250	278	148	175	60	31	15