# CDX 70 / 90 / 120 / 200

**STAINLESS STEEL HORIZONTAL SINGLE-STAGE CENTRIFUGAL PUMP**

50 Hz · 2-pole motor



## DESCRIPTION


Single-impeller centrifugal pumps with hydraulic components made of AISI 304 stainless steel, suitable for pressure boosting, water supply, water treatment and irrigation, air conditioning systems and general water pumping, including moderately aggressive liquids. Performance data according to ISO 9906, Annex A.

## FEATURES

- Single-stage centrifugal pump with axial suction and radial discharge
- Compact design: the pump is directly coupled to the motor on the same axis
- Easy installation: threaded inlet and outlet
- Lightweight: main parts and components are pressed from thin sheet metal

## CONSTRUCTION

EXPLODED VIEW · CDX70 / 90 / 120 / 200

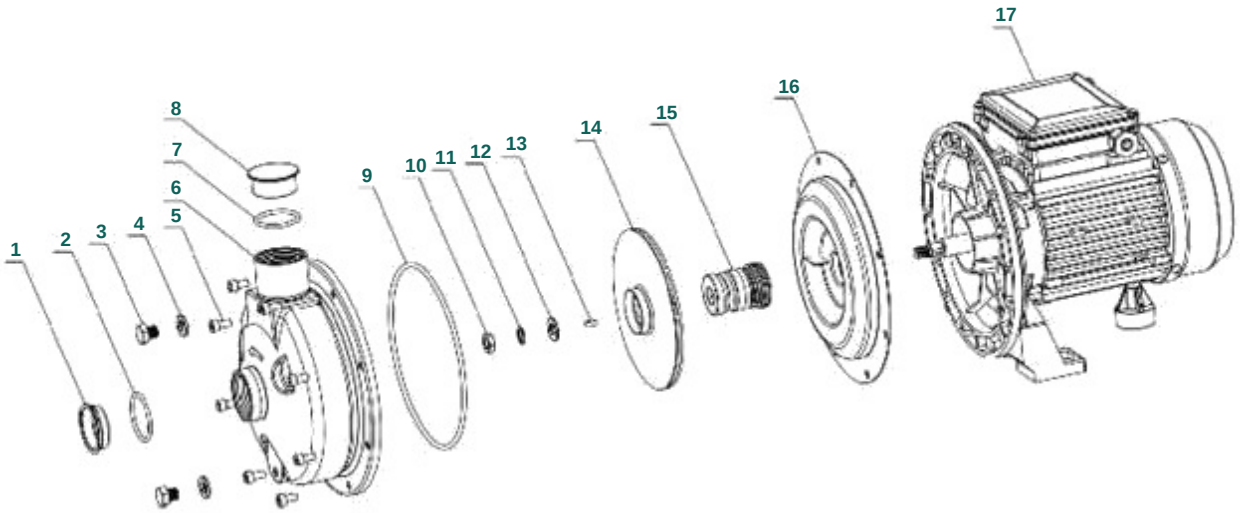


| No. | PART |
|---|---|
| 1 | Dust cap |
| 2 | O-ring |
| 3 | Plug |
| 4 | Washer |
| 5 | Hexagon socket bolt |
| 6 | Pump casing assembly |

| No. | PART |
|---|---|
| 7 | O-ring |
| 8 | Dust cap |
| 9 | O-ring |
| 10 | Hexagon nut |
| 11 | Spring washer |
| 12 | Washer |

| No. | PART |
|---|---|
| 13 | Key |
| 14 | Impeller |
| 15 | Mechanical seal |
| 16 | Pump cover |
| 17 | Motor |

## MATERIALS

- Pump body, impeller, diffuser and casing cover in AISI 304
- Shaft in AISI 303
- Bracket and motor casing in aluminium
- Mechanical seal in carbon/ceramic/NBR

## MODEL DESIGNATION

- CDX… three-phase, 3~ 380–415 V
- CDXM… single-phase, 1~ 220–240 V

# CDX 70 / 90 / 120 / 200

AQUARIS MADE IN ITALY

**STAINLESS STEEL HORIZONTAL SINGLE-STAGE CENTRIFUGAL PUMP**

50 Hz · 2-pole motor



| 0.37–2.2 kW | 1.2–15 m³/h | 12.5–38 m | G1¼–G1½ / 1" |
|---|---|---|---|
| RATED POWER | CAPACITY Q | TOTAL HEAD H | PORTS DNA / DNM |

## OPERATING CONDITIONS


- Maximum working pressure: 8 bar
- Maximum liquid temperature: 35 °C according to EN 60335-2-41 for domestic use
- 60 °C for other uses of CDX70/05, CDX70/07, CDX90/10
- 90 °C for other models

## APPLICATIONS

- Pressure boosting
- Water supply
- Water treatment and irrigation
- Air conditioning systems
- General water pumping, including moderately aggressive liquids

## MOTOR

- T.E.F.C. 2-pole motor, 50 Hz
- Insulation class F, degree of protection IP55
- Single-phase 1~ 220–240 V; three-phase 3~ 380–415 V
- Permanent split capacitor and automatic thermal overload protection for single-phase version
- Thermal protection to be provided by the user for three-phase version
- DNA G1½ for CDX200, G1¼ for the other models; DNM 1"

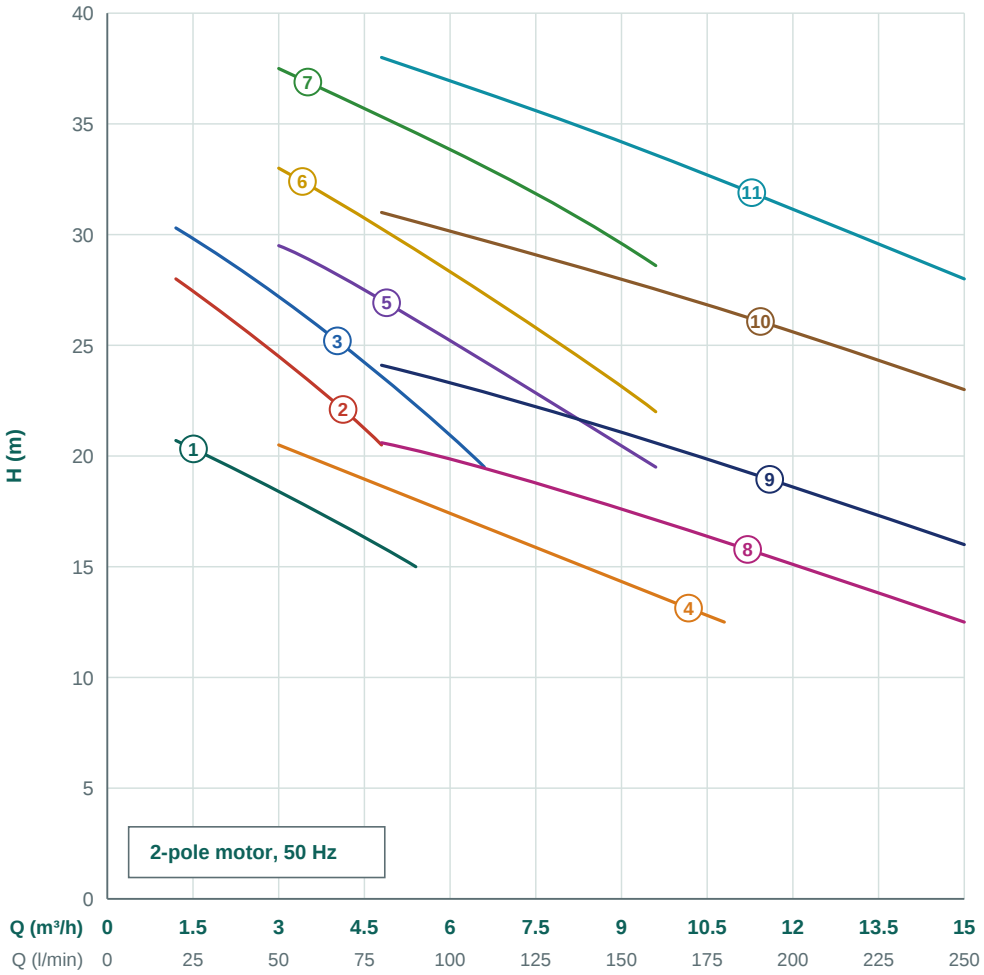


## PERFORMANCE DATA

| No. | MODEL 3~ 380–415 V | MODEL 1~ 220–240 V | $P_2$ kW | I (A) 1~ | I (A) 3~ | CAPACITY Q / TOTAL HEAD H (m) m³/h / l/min | 1.2 20 | 3 50 | 4.8 80 | 5.4 90 | 6.6 110 | 7.8 130 | 9.6 160 | 10.8 180 | 12.6 210 | 15 250 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | CDX70/05 | CDXM70/05 | 0.37 | 3.1 | 1.4 | | 20.7 | 18.4 | 15.9 | 15 | – | – | – | – | – | – |
| 2 | CDX70/07 | CDXM70/07 | 0.55 | 4.6 | 2.0 | | 28 | 24.5 | 20.5 | – | – | – | – | – | – | – |
| 3 | CDX90/10 | CDXM90/10 | 0.75 | 5.6 | 2.3 | | 30.3 | 27.2 | 23.6 | 22.3 | 19.5 | – | – | – | – | – |
| 4 | CDX120/07 | CDXM120/07 | 0.55 | 4.6 | 1.9 | | – | 20.5 | 18.7 | 18.1 | 16.8 | 15.5 | 13.7 | 12.5 | – | – |
| 5 | CDX120/12 | CDXM120/12 | 0.9 | 6.9 | 3.0 | | – | 29.5 | 27.1 | 26.1 | 24.3 | 22.4 | 19.5 | – | – | – |
| 6 | CDX120/15 | CDXM120/15 | 1.1 | 7.7 | 3.2 | | – | 33 | 30.3 | 29.3 | 27.3 | 25.3 | 22 | – | – | – |
| 7 | CDX120/20 | CDXM120/20 | 1.5 | 9.3 | 4.0 | | – | 37.5 | 35.3 | 34.6 | 33.1 | 31.4 | 28.6 | – | – | – |
| 8 | CDX200/12 | CDXM200/12 | 0.9 | 6.3 | 2.7 | | – | – | 20.6 | 20.2 | 19.5 | 18.5 | 17.1 | 16.1 | 14.6 | 12.5 |
| 9 | CDX200/15 | CDXM200/15 | 1.1 | 7.7 | 3.2 | | – | – | 24.1 | 23.7 | 22.9 | 22 | 20.6 | 19.6 | 18.1 | 16 |
| 10 | CDX200/20 | CDXM200/20 | 1.5 | 10.7 | 4.0 | | – | – | 31 | 30.6 | 29.7 | 28.9 | 27.5 | 26.6 | 25.1 | 23 |
| 11 | CDX200/25 | CDXM200/25 | 2.2 | 11.8 | 4.8 | | – | – | 38 | 37.5 | 36.4 | 35.3 | 33.6 | 32.4 | 30.5 | 28 |

# CDX 70 / 90 / 120 / 200

AQUARIS MADE IN ITALY

## DIMENSIONS

50 Hz · 2-pole motor

## DIMENSIONS TABLE

| MODEL | | DIMENSIONS (mm) | | | | | | | | | | | | | | | T | DNA |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ | 1~ | A | B 1~ | B 3~ | C | H | H1 | H2 | H3 | H4 | M | M1 | N | N1 | R | W | | |
| **CDX70/05** | CDXM70/05 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG11 | G1¼ |
| **CDX70/07** | CDXM70/07 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG11 | G1¼ |
| **CDX90/10** | CDXM90/10 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG11 | G1¼ |
| **CDX120/07** | CDXM120/07 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG11 | G1¼ |
| **CDX120/12** | CDXM120/12 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG13.5 | G1¼ |
| **CDX120/15** | CDXM120/15 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG13.5 | G1¼ |
| **CDX120/20** | CDXM120/20 | 232 | 345 | 345 | 199 | 250 | 118 | 132 | 235 | 253 | 55 | 40 | 140 | 180 | 105.5 | 95 | PG13.5 | G1¼ |
| **CDX200/12** | CDXM200/12 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG13.5 | G1½ |
| **CDX200/15** | CDXM200/15 | 208 | 318 | 318 | 178 | 229.5 | 106 | 123.5 | 209 | 215 | 50 | 38 | 120 | 160 | 108 | 92.5 | PG13.5 | G1½ |
| **CDX200/20** | CDXM200/20 | 208 | 345 | 345 | 199 | 229.5 | 106 | 123.5 | 223 | 240 | 55 | 40 | 140 | 180 | 105.5 | 95 | PG13.5 | G1½ |
| **CDX200/25** | CDXM200/25 | 232 | 345 | 345 | 199 | 250 | 118 | 132 | 235 | – | 55 | 40 | 140 | 180 | 105.5 | 95 | – | G1½ |

Dimensions in mm. T = cable gland.

## OVERALL DIMENSIONS

