DWO SERIES

STAINLESS STEEL CENTRIFUGAL PUMP · 50 Hz · n ≈ 2900 /min

AQUARIS MADE IN ITALY

Open-impeller centrifugal pumps with hydraulic parts made of AISI 304 stainless steel, suitable for handling suspended solids in food processing, e.g. washing vegetables, meat and fish.
Industrial washing machines for bottles, jars, glasses and crates, where the liquid may contain solids.
Process applications such as paint plants and general handling of dirty liquids.

0.37–4 kW	72 m³/h	19 m	8 bar	n ≈ 2900 /min	50 Hz
POWER	MAX. FLOW RATE	MAX. HEAD	MAX. PRESSURE	SPEED	FREQUENCY



DWO037



DWO100



DWO150 / DWO200

MATERIALS

01	Inlet cover	Plastic
02	Pump body	AISI 304
03	Impeller	AISI 304
04	Mechanical seal	Carbon/Ceramic/NBR
05	Flap	AISI 304
06	Support	Cast iron
07	Bearing	High quality
08	Shaft	AISI 304
09	Motor housing	Cast iron
10	Top cover	Plastic
11	Capacitor	High quality
12	Motor cover	Cast iron
13	Fan	Nylon
14	Fan cover	Steel

MODEL DESIGNATION

DWO: series
037 … 550: size
T: three-phase 3~ 380–415 V
M: single-phase 1~ 220–240 V
Example: DWO150T, DWO150M

ELECTRICAL DATA

Power supply: 50 Hz
1~ 220–240 V / 3~ 380–415 V
I (A): at 400 V (3~), at 230 V (1~)


OPERATING CONDITIONS

Max. working pressure: 8 bar
Max. liquid temperature: 90 °C
Passage of solids: max. Ø 19 mm

PERFORMANCE DATA

MODEL	P_2		I (A)	Q	m³/h	1	6	12	18	24	33	45	57	66	72
3~ / 1~	kW	HP	3~/1~		l/min	16.7	100	200	300	400	550	750	950	1100	1200
DWO037T DWO037M	0.37	0.5	1.1 2.8			12	1	–	–	–	–	–	–	–	–
DWO100T DWO100M	0.75	1	1.9 4.9			12	11.0	7.4	1	–	–	–	–	–	–
DWO150T DWO150M	1.1	1.5	2.5 6.8			–	9.5	8.9	7.9	6.9	5.1	–	–	–	–
DWO200T DWO200M	1.5	2	3.5 9.0		H (m)	–	12.7	12.3	11.5	10.5	8.6	5.8	–	–	–
DWO300T DWO300M	2.2	3	4.8 12.9			–	15	14.5	13.8	12.9	11.7	9.7	7.5	–	–
DWO400T DWO400M	3.0	4	6.4 17.3			–	17.5	16.9	16.3	15.6	14.3	12.4	9.8	7.6	–
DWO550T	4	5.5	8.4			–	19	18.4	17.8	17.1	15.8	13.9	11.3	9.1	7.5

EXPLODED VIEW

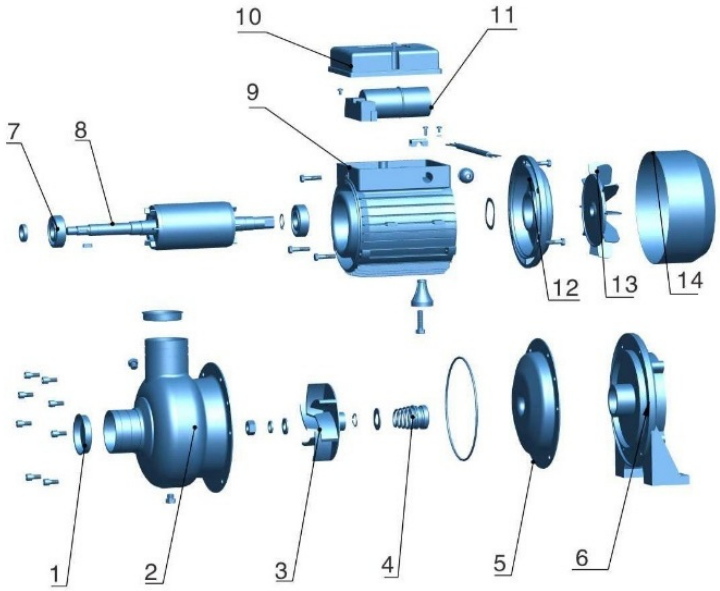


DWO SERIES

AQUARIS MADE IN ITALY

STAINLESS STEEL CENTRIFUGAL PUMP · 50 Hz · n ≈ 2900 /min

Q–H CURVES

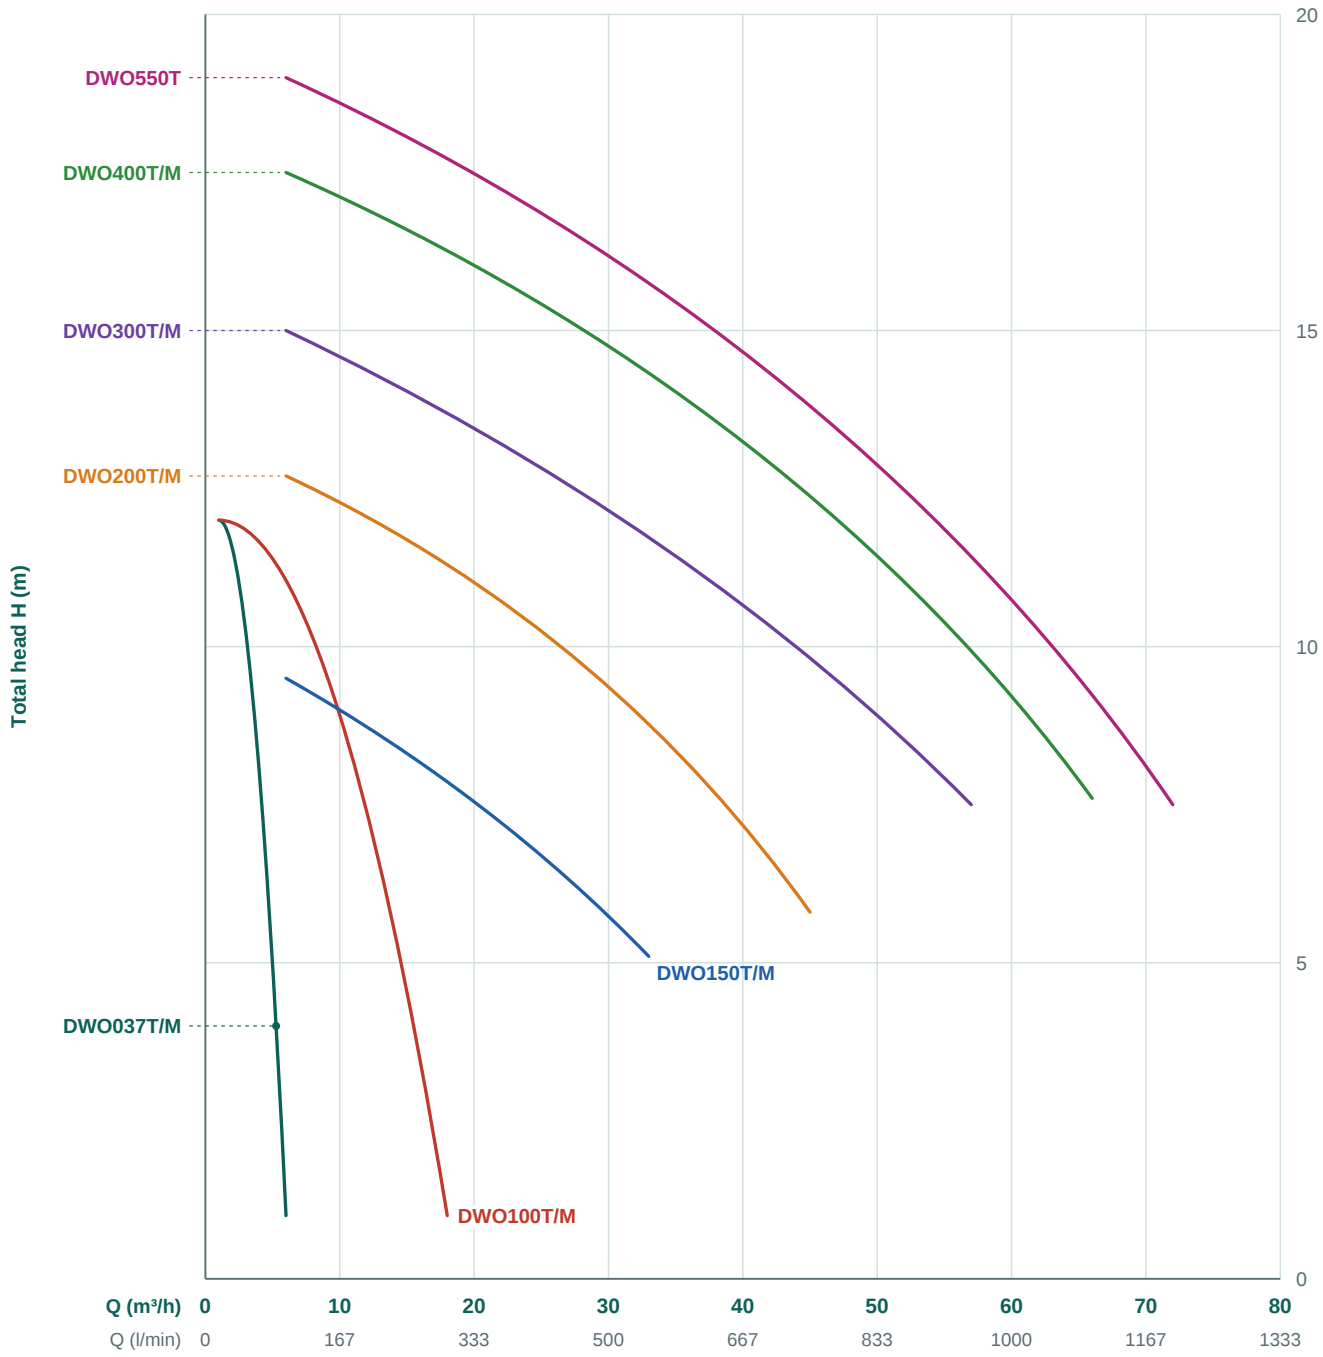

MOTOR AND PORTS

2-pole asynchronous motor, insulation class F, protection IP55
Single-phase: permanent split capacitor and automatic thermal overload protection
Three-phase: thermal protection to be provided by the user
Suction DNA: 1"1/4 for DWO037 and DWO100, 2" for DWO150 and DWO200, 2"1/2 for DWO300, DWO400 and DWO550T
Delivery DNM: 1"1/4 for DWO037 and DWO100, 2" for DWO150 to DWO550T