DWO SERIES

DWO

Stainless steel
centrifugal pump



DWO037



DWO100



DWO150 / DWO200

RANGE CHARACTERISTICS

Power	**0.37–4 kW (0.5–5.5 HP)**
Max. flow rate	**72 m³/h**
Max. head	**19 m**
Speed	**n ≈ 2900 /min**
Frequency	**50 Hz**
Power supply	**1~ 220–240 V** **3~ 380–415 V**

T = three-phase 3~
M = single-phase 1~

DESCRIPTION AND APPLICATIONS

Open-impeller centrifugal pumps with hydraulic parts made of AISI 304 stainless steel, suitable for handling suspended solids in food processing, e.g. washing vegetables, meat and fish.
Industrial washing machines for bottles, jars, glasses and crates, where the liquid may contain solids.
Process applications such as paint plants and general handling of dirty liquids.

TECHNICAL DATA & CONSTRUCTION


50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	I A	Q	m³/h	1	6	12	18	24	33	45	57	66	72
					l/min	16.7	100	200	300	400	550	750	950	1100	1200
THREE-PHASE 3~ 380–415 V · I at 400 V															
DWO037T	0.37	0.5	1.1			12	1	–	–	–	–	–	–	–	–
DWO100T	0.75	1	1.9			12	11.0	7.4	1	–	–	–	–	–	–
DWO150T	1.1	1.5	2.5			–	9.5	8.9	7.9	6.9	5.1	–	–	–	–
DWO200T	1.5	2	3.5	H (m)		–	12.7	12.3	11.5	10.5	8.6	5.8	–	–	–
DWO300T	2.2	3	4.8			–	15	14.5	13.8	12.9	11.7	9.7	7.5	–	–
DWO400T	3.0	4	6.4			–	17.5	16.9	16.3	15.6	14.3	12.4	9.8	7.6	–
DWO550T	4	5.5	8.4			–	19	18.4	17.8	17.1	15.8	13.9	11.3	9.1	7.5
SINGLE-PHASE 1~ 220–240 V · I at 230 V															
DWO037M	0.37	0.5	2.8			12	1	–	–	–	–	–	–	–	–
DWO100M	0.75	1	4.9			12	11.0	7.4	1	–	–	–	–	–	–
DWO150M	1.1	1.5	6.8	H (m)		–	9.5	8.9	7.9	6.9	5.1	–	–	–	–
DWO200M	1.5	2	9.0			–	12.7	12.3	11.5	10.5	8.6	5.8	–	–	–
DWO300M	2.2	3	12.9			–	15	14.5	13.8	12.9	11.7	9.7	7.5	–	–
DWO400M	3.0	4	17.3			–	17.5	16.9	16.3	15.6	14.3	12.4	9.8	7.6	–

EXPLODED VIEW AND MATERIALS

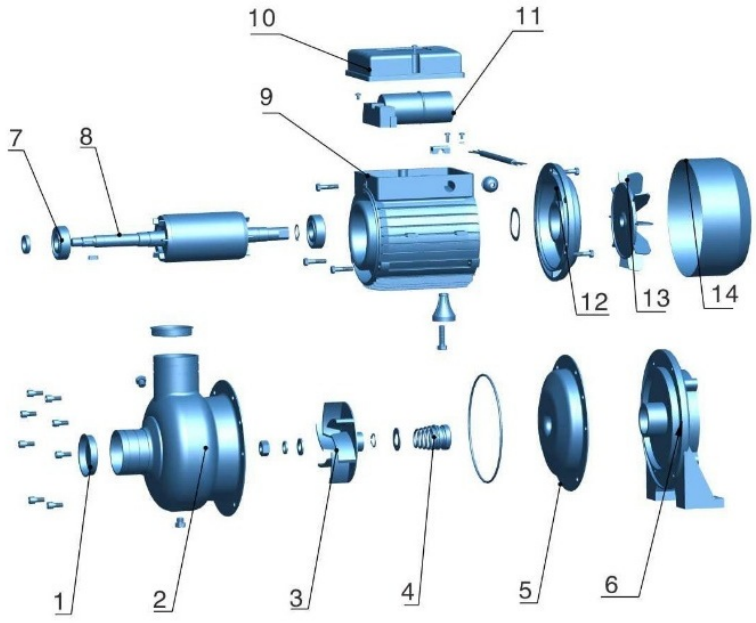

NO.	PART	MATERIAL
1	Inlet cover	Plastic
2	Pump body	AISI 304
3	Impeller	AISI 304
4	Mechanical seal	Carbon/Ceramic/NBR
5	Flap	AISI 304
6	Support	Cast iron
7	Bearing	High quality

NO.	PART	MATERIAL
8	Shaft	AISI 304
9	Motor housing	Cast iron
10	Top cover	Plastic
11	Capacitor	High quality
12	Motor cover	Cast iron
13	Fan	Nylon
14	Fan cover	Steel

DWO SERIES

DWO

Stainless steel
centrifugal pump

MODEL DESIGNATION

DWO: series
037 … 550: size
T: three-phase 3~ 380–415 V
M: single-phase 1~ 220–240 V
Example: DWO150T, DWO150M

OPERATING CONDITIONS

Max. working pressure: 8 bar
Max. liquid temperature: 90 °C
Passage of solids: max. Ø 19 mm

PORTS


Suction DNA: 1"1/4 for DWO037 and DWO100, 2" for DWO150 and DWO200, 2"1/2 for DWO300, DWO400 and DWO550T
Delivery DNM: 1"1/4 for DWO037 and DWO100, 2" for DWO150 to DWO550T

Q–H CURVES & MOTOR

50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

Q–H CURVES

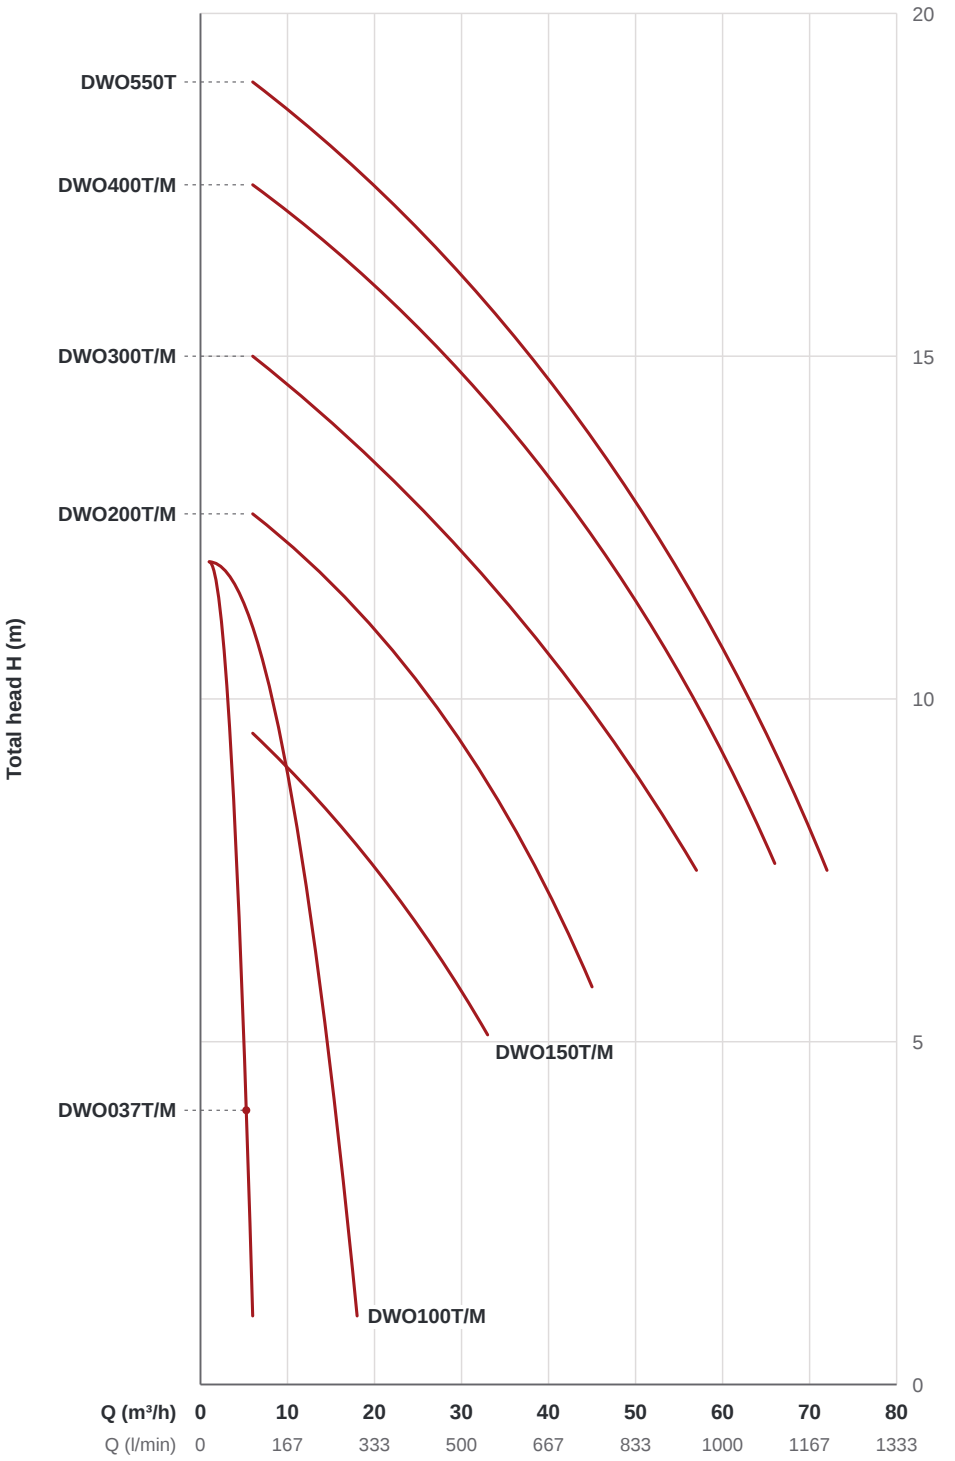

MOTOR

2-pole asynchronous motor, insulation class F, protection IP55
Single-phase: permanent split capacitor and automatic thermal overload protection
Three-phase: thermal protection to be provided by the user