CM SERIES

CM

Close-coupled centrifugal pump



RANGE CHARACTERISTICS

Capacity	**0–400 m³/h**
Head	**0–151 m**
Power	**0.75–160 kW**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

Example: CM 32-250/7.5

Blank = Single impeller

FIELDS OF USE

Clean water · Civil · Industrial · Firefighting

CLOSE-COUPLED CENTRIFUGAL PUMP

EN733 | 50 Hz | n ≈ 2900 /min | 3~ 380–415 V

Redpump
Italy Standard

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

RANGE OVERVIEW

SIZE	IMPELLER SIZES (mm)	DN (mm)	MODELS	P2 (kW)	Q max (m³/h)	H max (m)	PAGE
CM 32	all sizes	50 × 32	12	0.75–15	27	97	**02**
CM 40	all sizes	65 × 40	11	1.1–18.5	48	90	**03**
CM 50	all sizes	65 × 50	11	2.2–22	90	89.5	**04**
CM 65	125 / 160 / 200 / 250	80 × 65	12	4–37	138	92	**05**
CM 65	315	80 × 65	4	45–90	210	151	**06**
CM 80	125 / 160	100 × 80	7	4–22	210	44	**07**
CM 80	200 / 250 / 315	100 × 80	9	22–90	240	144	**08**
CM 100	160 / 200	125 × 100	6	15–37	300	55	**09**
CM 100	250 / 315	125 × 100	9	45–160	360	148	**10**
CM 125	all sizes	150 × 125	6	45–90	400	87	**11**

TECHNICAL SHEET – MATERIALS

Model	**CM**	Casing	**Grey cast iron**
T max	**120 °C**	Impeller	**Cast iron / AISI 304 / Brass**
Class	**Class F**	Shaft	**45# steel / AISI 304**
IP	**IP 55**	Shaft seal	**Mechanical seal**
Duty	**S1 continuous**	Bearing	**Grease-lubricated rolling bearings**

CM SERIES

CM 32

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)


Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 50 × 32 | 50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

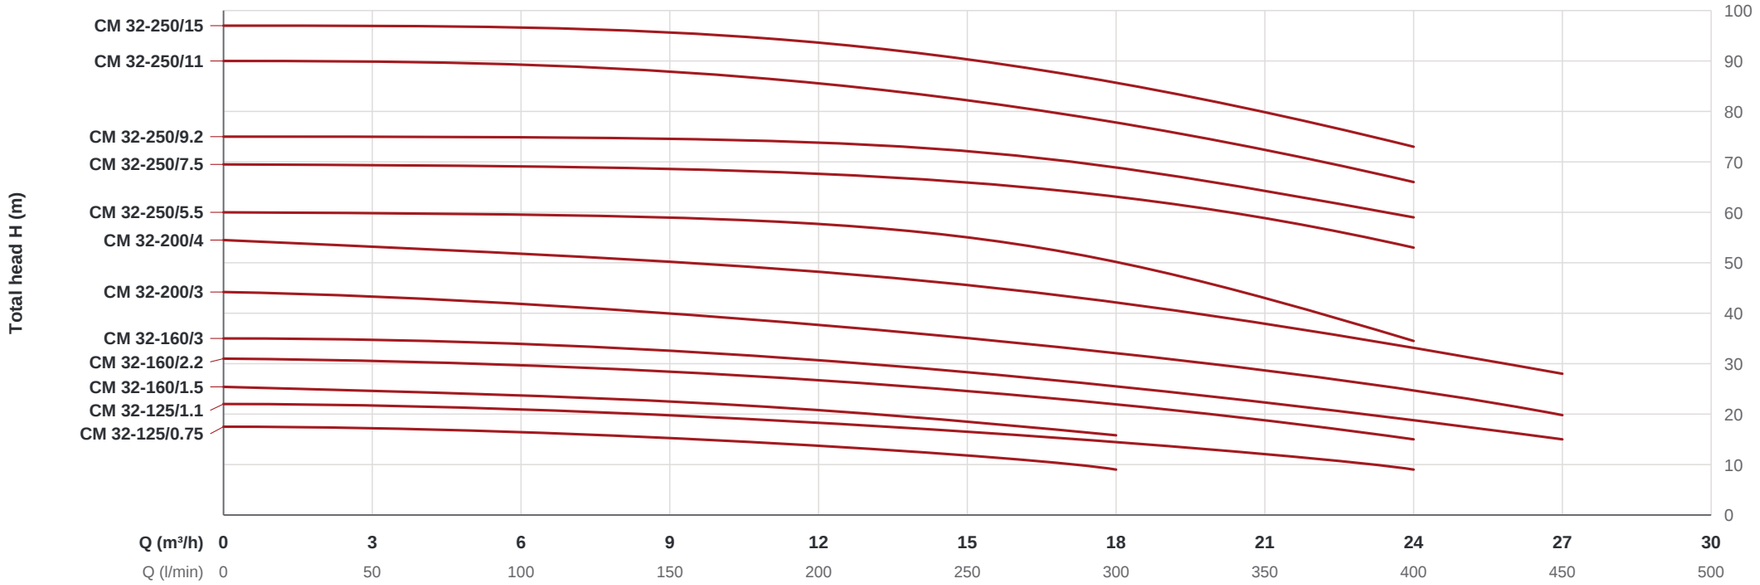

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	6	9	15	18	24	27
				l/min	0	100	150	250	300	400	450
CM 32-125 · DN 50 × 32 mm											
CM 32-125/0.75	0.75	1	H (m)		17.5	16.7	15	12	9	–	–
CM 32-125/1.1	1.1	1.5			22	21	19.7	16.5	14.5	9	–
CM 32-160 · DN 50 × 32 mm											
CM 32-160/1.5	1.5	2	H (m)		25.4	23.7	22.5	18.5	15.8	–	–
CM 32-160/2.2	2.2	3			31	29.6	28.5	24.5	22	15	–
CM 32-160/3	3	4			35	34.3	32.5	28	25.5	19	15
CM 32-200 · DN 50 × 32 mm											
CM 32-200/3	3	4	H (m)		44.2	42	39.8	35.2	32.2	24.6	19.8
CM 32-200/4	4	5.5			54.5	52	50	45.5	42.3	33	28
CM 32-250 · DN 50 × 32 mm											
CM 32-250/5.5	5.5	7.5	H (m)		60	59.5	59	55	50.2	34.5	–
CM 32-250/7.5	7.5	10			69.5	69	68.5	66	63	53	–
CM 32-250/9.2	9.2	12.5			75	75	74.5	72	69	59	–
CM 32-250/11	11	15			90	89.5	88	82	78	66	–
CM 32-250/15	15	20			97	96.5	96	90	86	73	–

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 40

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)


Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 65 × 40 | 50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

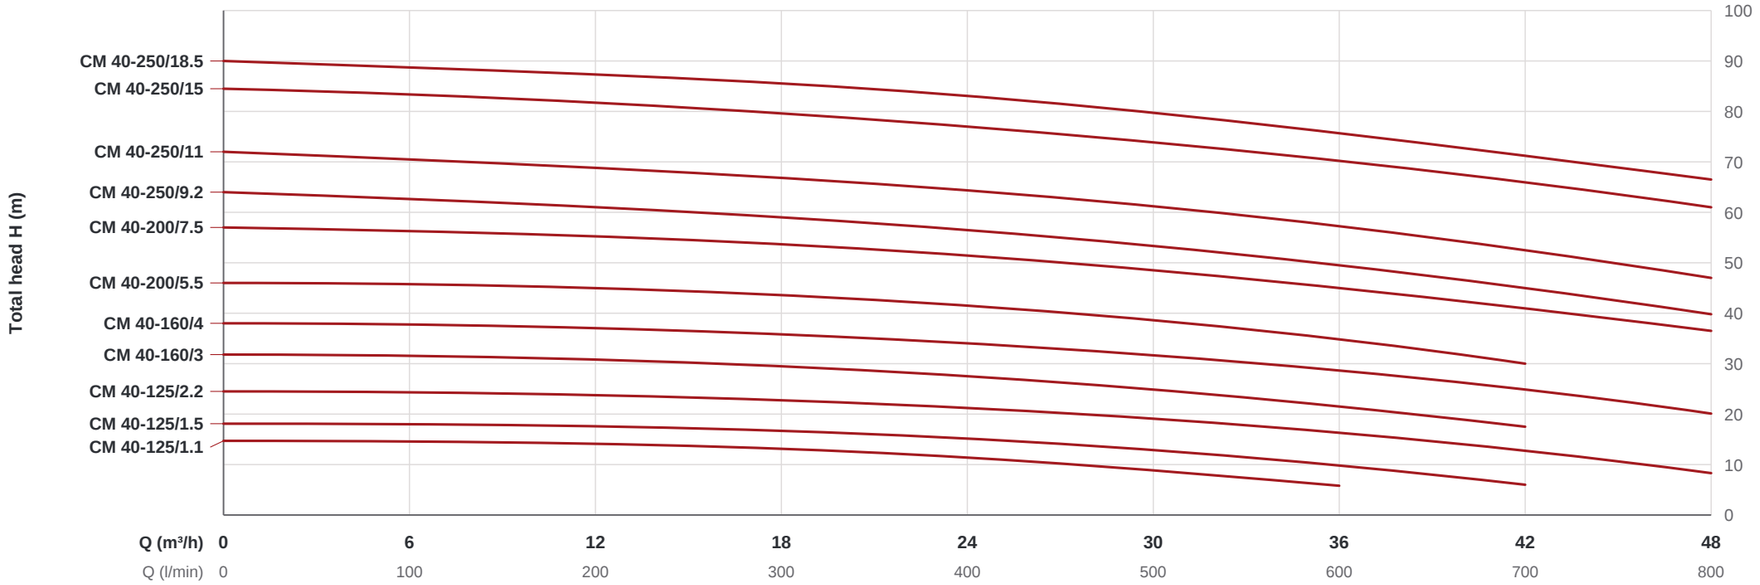

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	18	24	27	36	42	48
				l/min	0	300	400	450	600	700	800
CM 40-125 · DN 65 × 40 mm											
CM 40-125/1.1	1.1	1.5	H (m)		14.7	13	11.5	10.1	5.8	–	–
CM 40-125/1.5	1.5	2			18.1	17	15	13.9	10	6	–
CM 40-125/2.2	2.2	3			24.5	23.2	21.5	20.2	16	13	8.3
CM 40-160 · DN 65 × 40 mm											
CM 40-160/3	3	4	H (m)		31.8	29.5	27.5	26.3	21.5	17.5	–
CM 40-160/4	4	5.5			38	36	34	33	28.5	25	20.1
CM 40-200 · DN 65 × 40 mm											
CM 40-200/5.5	5.5	7.5	H (m)		46	43.8	41.3	40.1	35	30	–
CM 40-200/7.5	7.5	10			57	53.6	51.5	50	45	41	36.5
CM 40-250 · DN 65 × 40 mm											
CM 40-250/9.2	9.2	12.5	H (m)		64	59	56.5	55	49.5	45	39.8
CM 40-250/11	11	15			72	67.5	65	63.5	57.5	52.2	47
CM 40-250/15	15	20			84.5	79.3	77.3	75.2	70	66	61
CM 40-250/18.5	18.5	25			90	85.5	82.8	80.7	75.8	70.5	66.5

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 50

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)


Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 65 × 50 | 50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

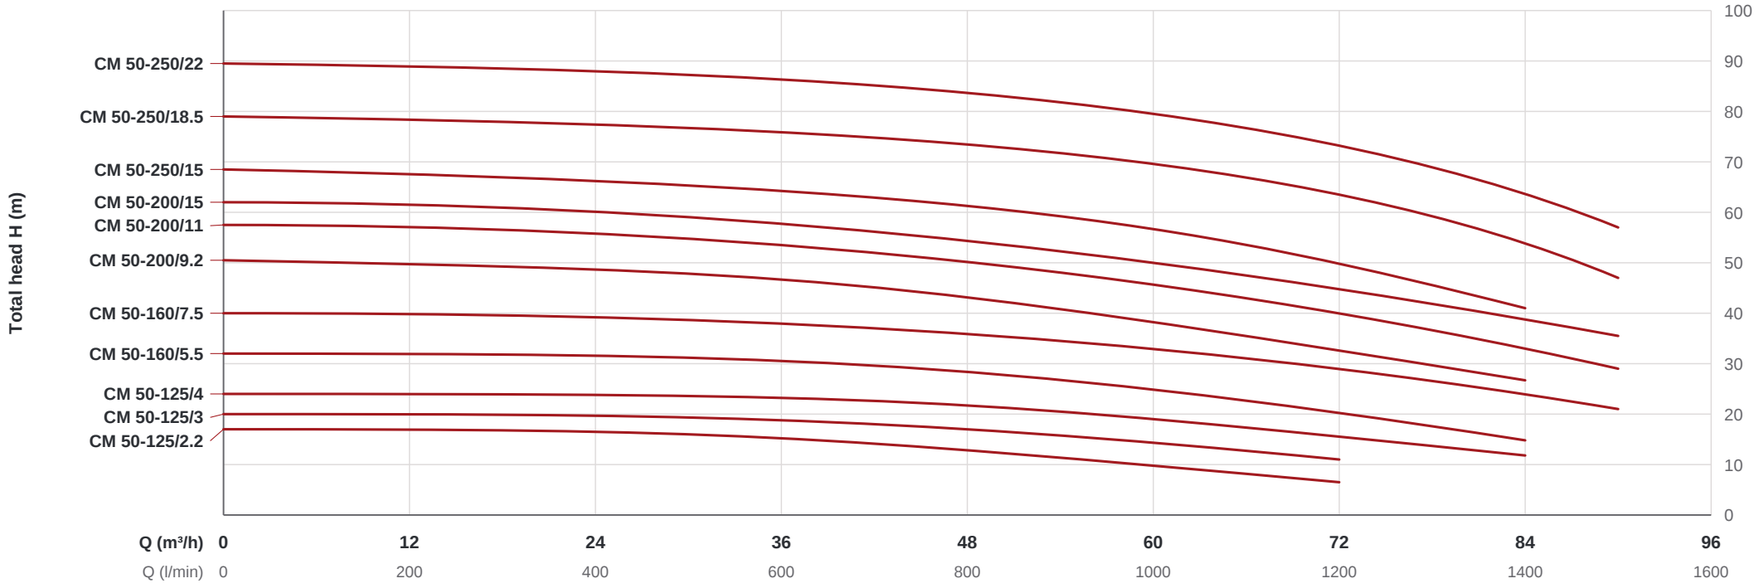

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	36	42	48	54	72	84	90
				l/min	0	600	700	800	900	1200	1400	1500
CM 50-125 · DN 65 × 50 mm												
CM 50-125/2.2	2.2	3	H (m)		17	15.4	14	12.8	11.5	6.5	–	–
CM 50-125/3	3	4			20	18.8	18	17	15.6	11	–	–
CM 50-125/4	4	5.5			24	23.1	23	21.5	20.3	15.8	11.8	–
CM 50-160 · DN 65 × 50 mm												
CM 50-160/5.5	5.5	7.5	H (m)		32	30.6	30	28	26.6	20.5	14.8	–
CM 50-160/7.5	7.5	10			40	38	37	36	34.4	29	24	21
CM 50-200 · DN 65 × 50 mm												
CM 50-200/9.2	9.2	12.5	H (m)		50.5	46.8	45	43	40.9	32.5	26.7	–
CM 50-200/11	11	15			57.5	53.5	52	50	47.5	40	34	29
CM 50-200/15	15	20			62	58	56.5	54.5	52	44.5	39	35.5
CM 50-250 · DN 65 × 50 mm												
CM 50-250/15	15	20	H (m)		68.5	64	63	61.5	59	50	41	–
CM 50-250/18.5	18.5	25			79	75.8	74.8	74	71.5	63.5	55.5	47
CM 50-250/22	22	30			89.5	86	85.3	84	81.5	73.5	63.5	57

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 65

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)


Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 80 × 65 | 50 Hz | n ≈ 2900 /min | CM 65-125 · CM 65-160 · CM 65-200 · CM 65-250

Redpump
Italy Standard

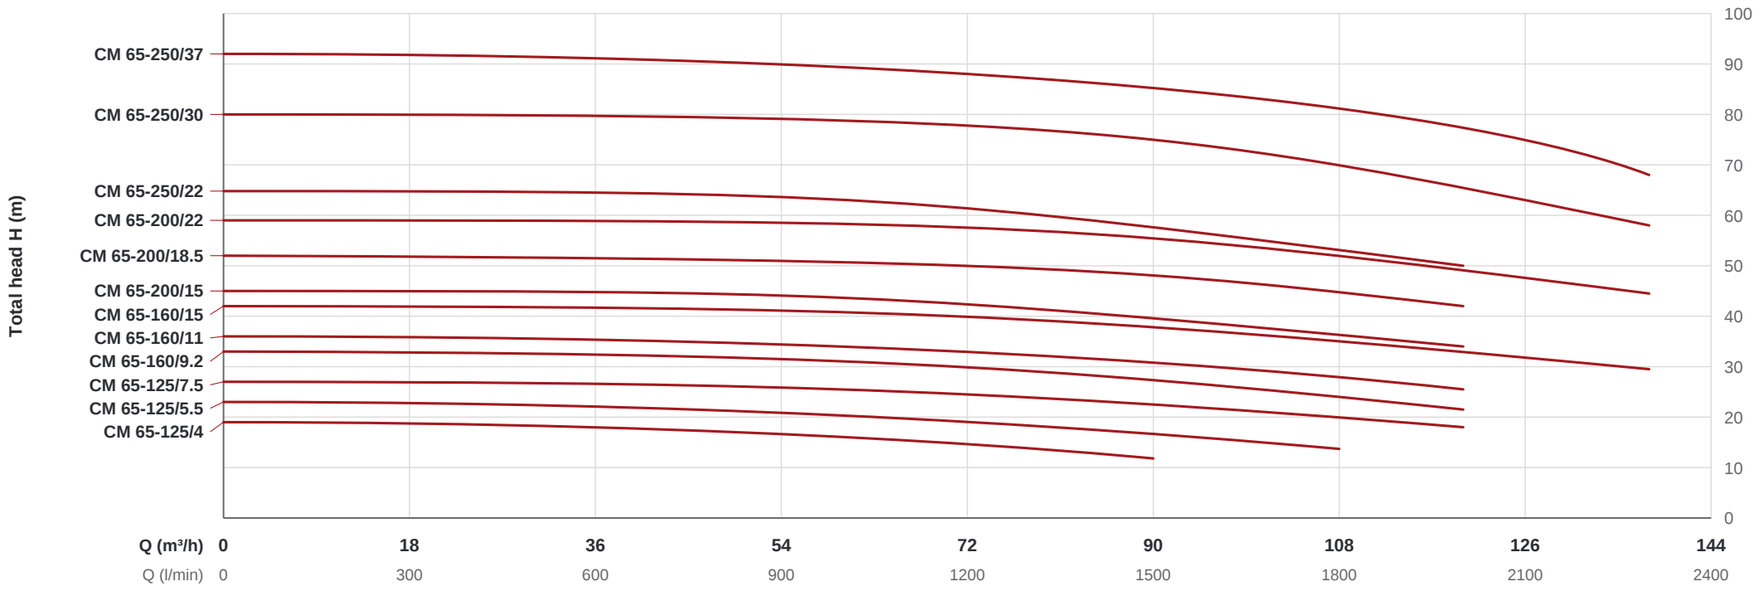

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	48	54	72	84	90	108	120	138
				l/min	0	800	900	1200	1400	1500	1800	2000	2300
CM 65-125 · DN 80 × 65 mm													
CM 65-125/4	4	5.5			19	17.3	16.8	14.5	13	11.8	–	–	–
CM 65-125/5.5	5.5	7.5	H (m)		23	21.3	20.9	19	17.5	16.7	13.7	–	–
CM 65-125/7.5	7.5	10			27	26	25.6	24.5	23	22.5	20	18	–
CM 65-160 · DN 80 × 65 mm													
CM 65-160/9.2	9.2	12.5			33	31.9	31.5	30	28	27.1	24	21.5	–
CM 65-160/11	11	15	H (m)		36	34.8	34.5	33	31.5	30.8	28	25.5	–
CM 65-160/15	15	20			42	41	41	40	38.5	37.8	35	33	29.5
CM 65-200 · DN 80 × 65 mm													
CM 65-200/15	15	20			45	45	45	43	41	40.2	36.5	34	–
CM 65-200/18.5	18.5	25	H (m)		52	52	52	51	49	48.2	44.5	42	–
CM 65-200/22	22	30			59	59	59	58	56	55	52	49.5	44.5
CM 65-250 · DN 80 × 65 mm													
CM 65-250/22	22	30			64.8	64.7	64.7	62	60	58.5	53	50	–
CM 65-250/30	30	40	H (m)		80	79.8	79.8	77.5	75.5	74.5	70	66	58
CM 65-250/37	37	50			92	90.5	90.5	88.5	87	85	80.5	78	68

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 65

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE


CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 80 × 65 | 50 Hz | n ≈ 2900 /min | CM 65-315

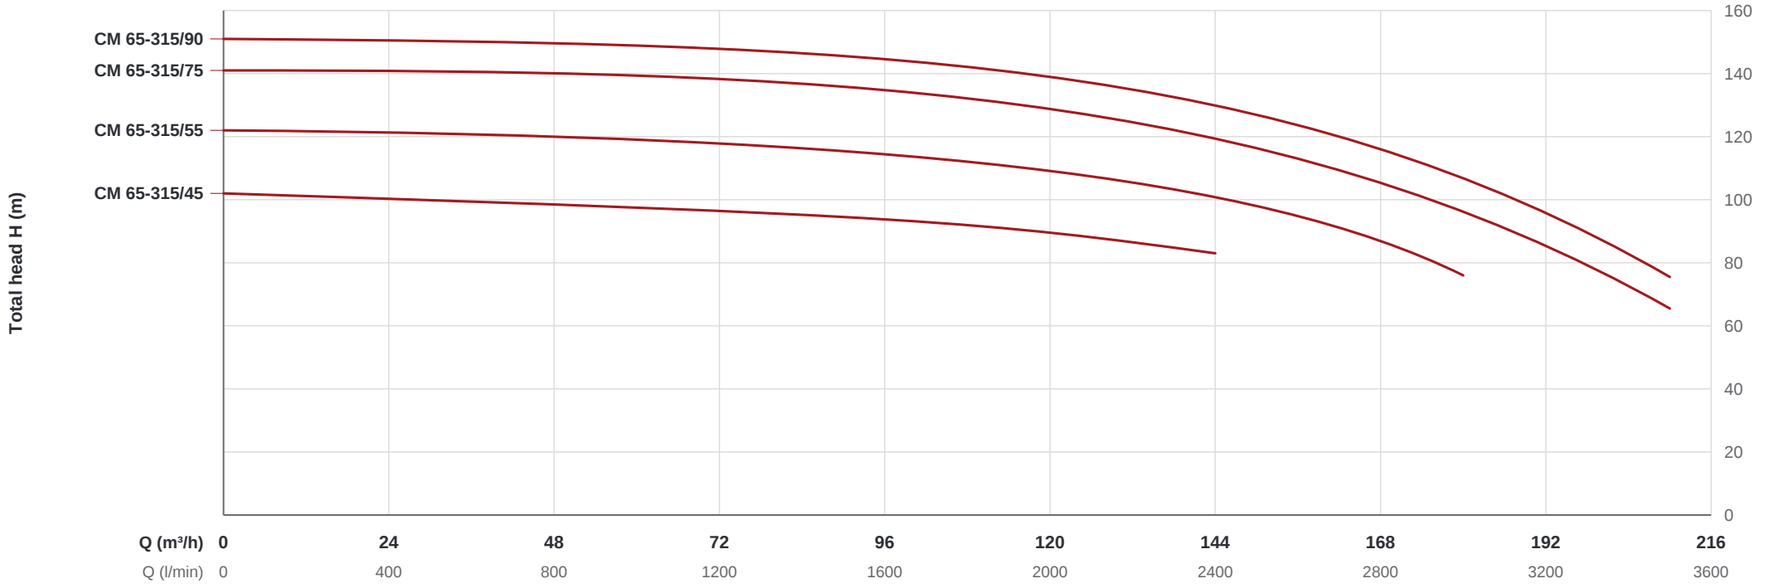

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	60	90	120	144	180	200	210
				l/min	0	1000	1500	2000	2400	3000	3333	3500
CM 65-315 · DN 80 × 65 mm												
CM 65-315/45	45	60	H (m)		102	98	94.5	90	83	–	–	–
CM 65-315/55	55	75			122	120	114.5	110	100	76	–	–
CM 65-315/75	75	100			141	141	134.5	130	120	96	78	65.5
CM 65-315/90	90	125			151	150	144.5	140	130	106	88	75.5

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 80

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)


Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 100 × 80 | 50 Hz | n ≈ 2900 /min | CM 80-125 · CM 80-160

Redpump
Italy Standard

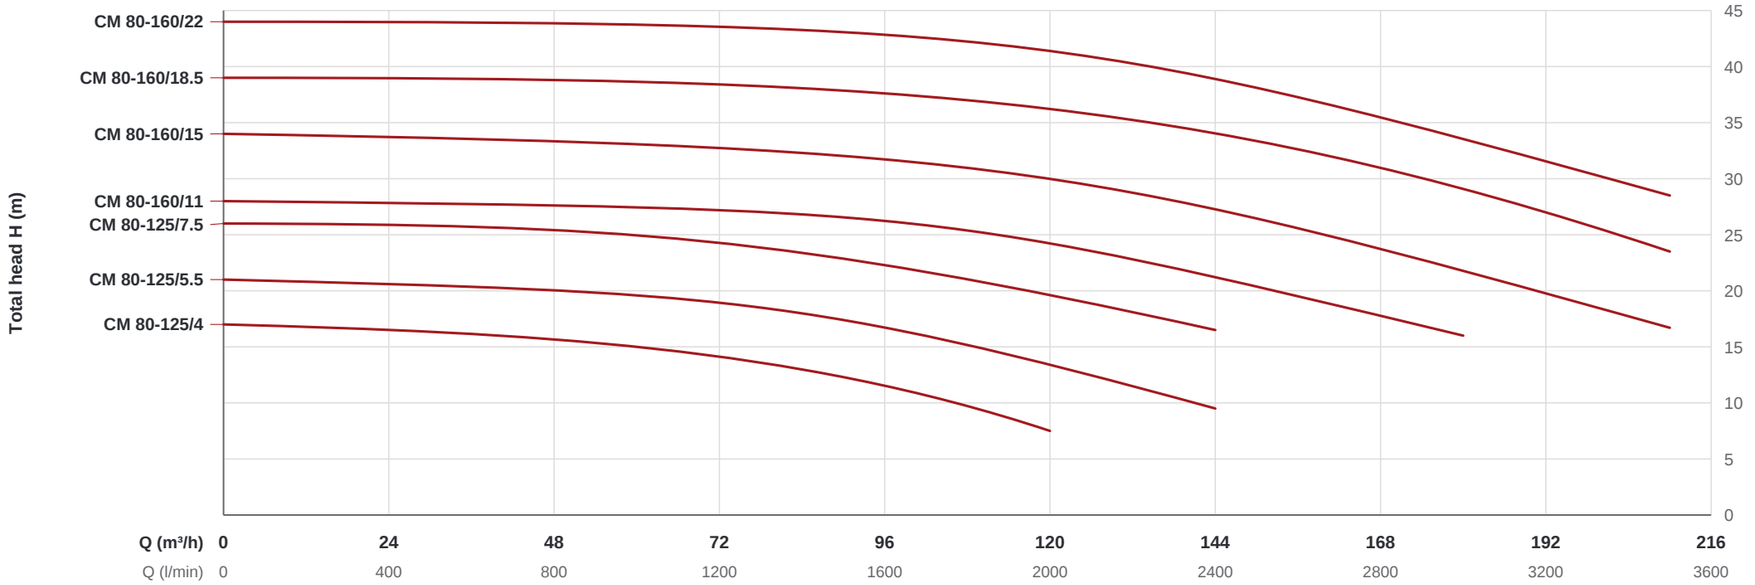

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	60	90	120	144	180	200	210
				l/min	0	1000	1500	2000	2400	3000	3333	3500
CM 80-125 · DN 100 × 80 mm												
CM 80-125/4	4	5.5	H (m)		17	15	12.3	7.5	–	–	–	–
CM 80-125/5.5	5.5	7.5			21	19.6	17.4	13.4	9.5	–	–	–
CM 80-125/7.5	7.5	10			26	24.8	23	19.5	16.5	–	–	–
CM 80-160 · DN 100 × 80 mm												
CM 80-160/11	11	15	H (m)		28	27	27	24.5	21.1	16	–	–
CM 80-160/15	15	20			34	32.6	32.5	30.2	27	22.1	18.5	16.7
CM 80-160/18.5	18.5	25			39	38.5	38	36.7	33.6	28.8	25.3	23.5
CM 80-160/22	22	30			44	43.5	43	41.7	38.6	33.8	30.3	28.5

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 80

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)


Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 100 × 80 | 50 Hz | n ≈ 2900 /min | CM 80-200 · CM 80-250 · CM 80-315

Redpump
Italy Standard

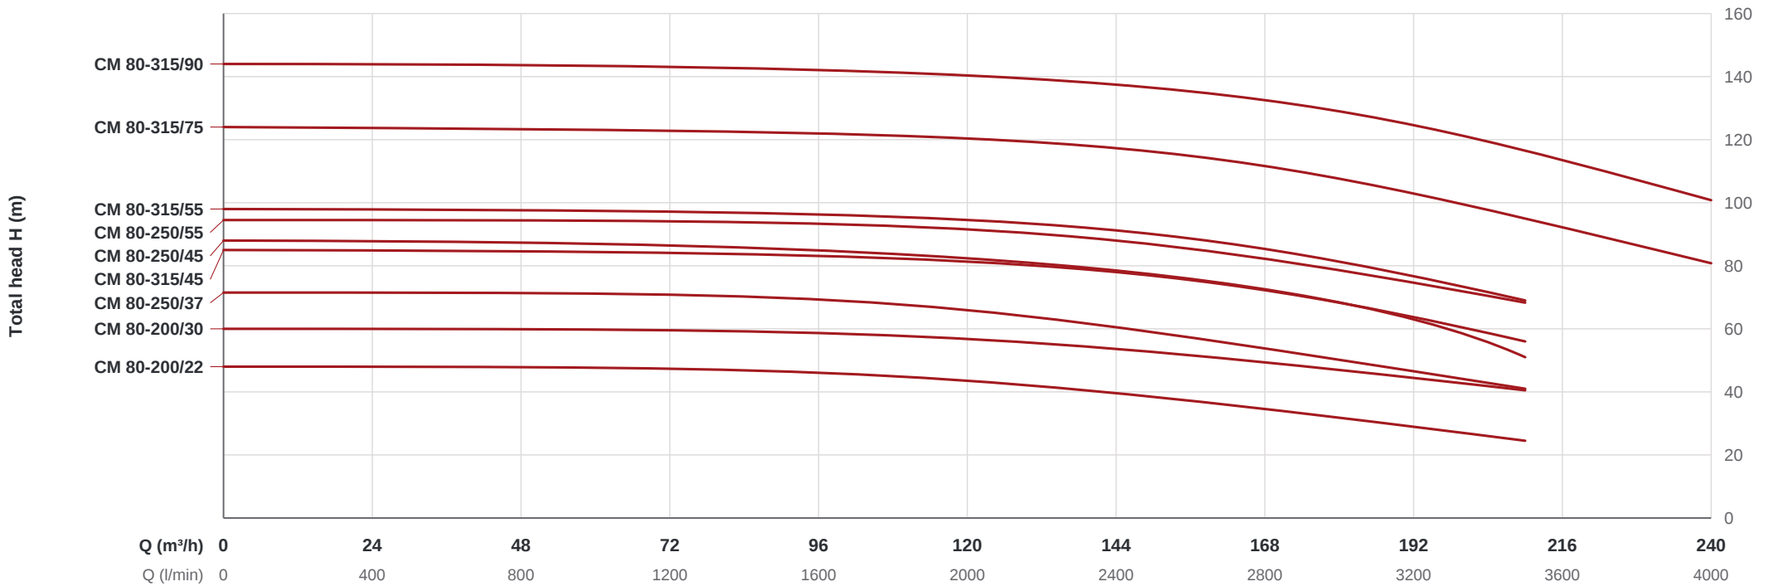

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	60	90	120	144	180	200	210	220	240
				l/min	0	1000	1500	2000	2400	3000	3333	3500	3667	4000
CM 80-200 · DN 100 × 80 mm														
CM 80-200/22	22	30	H (m)		48	47.7	47.5	43.5	39.2	32.5	27.2	24.5	–	–
CM 80-200/30	30	40			60	59.7	59.5	57	53.1	47	42.7	40.5	–	–
CM 80-250 · DN 100 × 80 mm														
CM 80-250/37	37	50	H (m)		71.5	70.9	70.5	65.5	59.3	51	43.2	41	–	–
CM 80-250/45	45	60			88	86.7	86	83.6	78.5	70.5	60	51	–	–
CM 80-250/55	55	75			94.5	94.5	94.5	91.8	87	79.5	72.1	68.3	–	–
CM 80-315 · DN 100 × 80 mm														
CM 80-315/45	45	60	H (m)		85	84	82.6	82	78	68.3	61	56	–	–
CM 80-315/55	55	75			98	97	95.6	95	91	81.3	74	69	–	–
CM 80-315/75	75	100			124	123	121.6	121	117	107.3	100	95	90	80.8
CM 80-315/90	90	125			144	143	141.6	141	137	127.3	120	115	110	100.8

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 100

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE


CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 125 × 100 | 50 Hz | n ≈ 2900 /min | CM 100-160 · CM 100-200

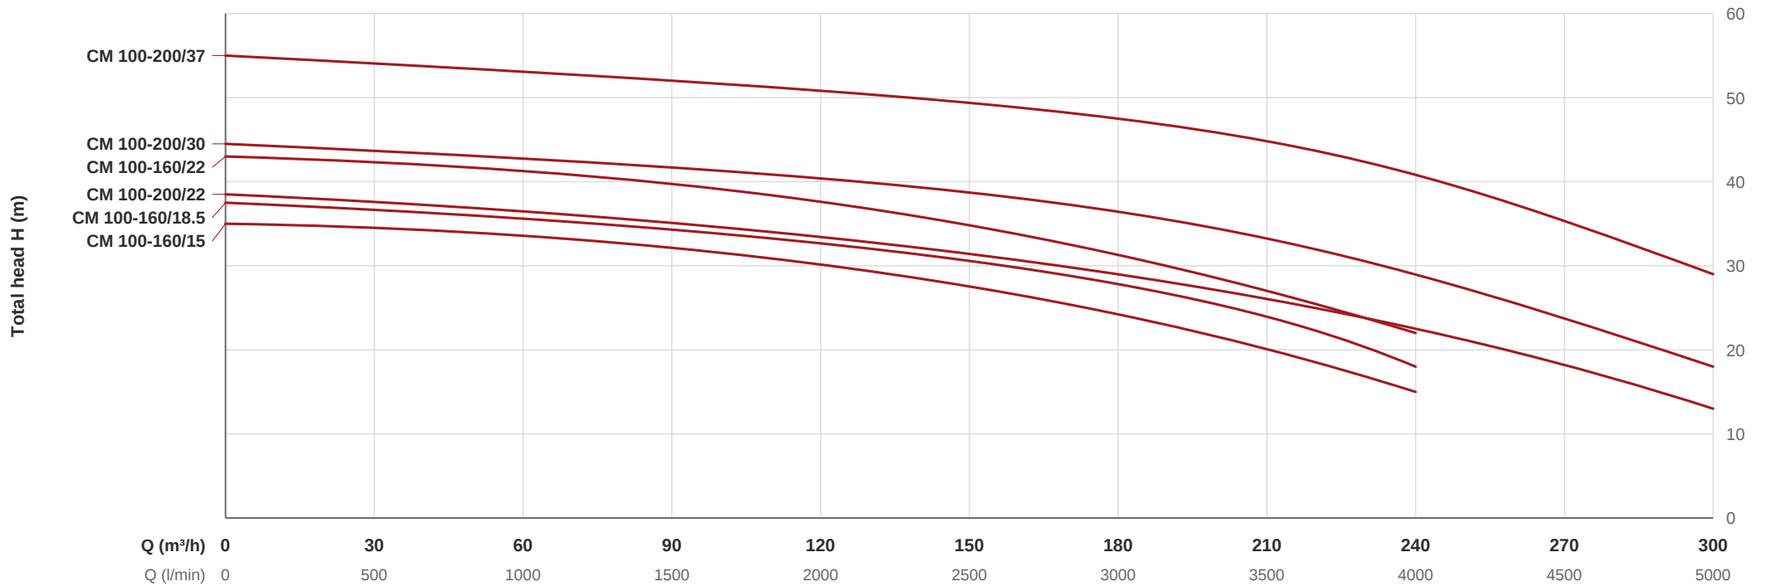

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	60	90	120	144	180	200	210	220	240	280	300
				l/min	0	1000	1500	2000	2400	3000	3333	3500	3667	4000	4667	5000
CM 100-160 · DN 125 × 100 mm																
CM 100-160/15	15	20			35	33.5	32.5	30	27.8	24.5	21.5	20	18.3	15	–	–
CM 100-160/18.5	18.5	25	**H (m)**		37.5	35.7	34.7	32.8	30.7	27.5	25.7	24	22	18	–	–
CM 100-160/22	22	30			43	41	40	37.6	35.2	31.5	28.5	27	25.3	22	–	–
CM 100-200 · DN 125 × 100 mm																
CM 100-200/22	22	30			38.5	36.7	35.7	33.8	31.7	28.5	26.8	26	25	22.9	16.3	13
CM 100-200/30	30	40	**H (m)**		44.5	42.5	42	40.2	38.8	36.7	34.2	33	31.7	29	21.7	18
CM 100-200/37	37	50			55	53	51	50.6	49.2	47	45	44	42.8	40.5	32.8	29

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 100

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE


CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)

Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 125 × 100 | 50 Hz | n ≈ 2900 /min | CM 100-250 · CM 100-315

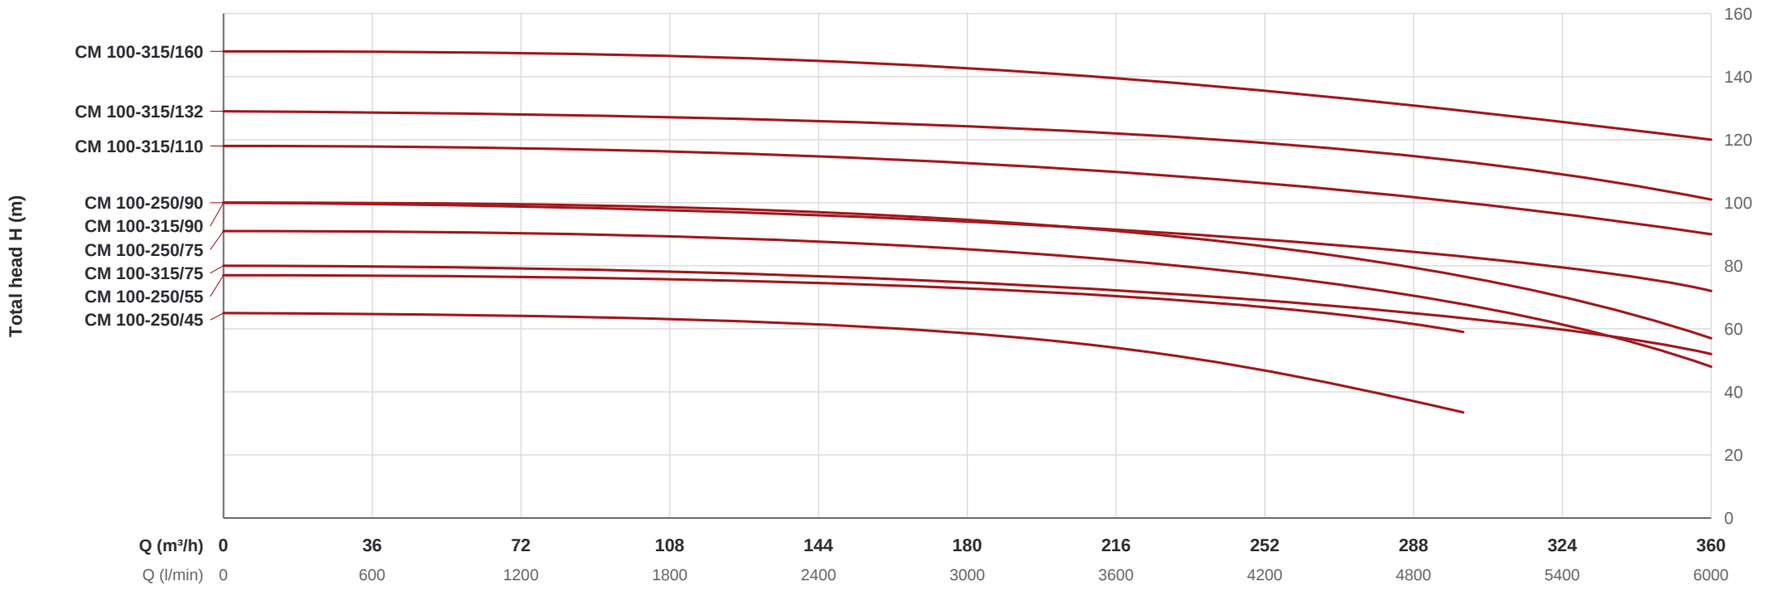

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	60	90	120	144	180	200	210	220	240	280	300	360
				l/min	0	1000	1500	2000	2400	3000	3333	3500	3667	4000	4667	5000	6000
CM 100-250 · DN 125 × 100 mm																	
CM 100-250/45	45	60	H (m)		65	65	64	63	61	58	56	55	53.3	50	39	33.5	–
CM 100-250/55	55	75			77	76	75.5	75	73.8	72	71.7	71.5	70.7	69	62.3	59	–
CM 100-250/75	75	100			91	91	90.5	89.7	88	85.5	84	83.3	81.5	78	71.7	68.5	48
CM 100-250/90	90	125			100	100	99.5	98.7	97	94.5	93	92.3	90.5	87	80.7	77.5	57
CM 100-315 · DN 125 × 100 mm																	
CM 100-315/75	75	100	H (m)		80	79.4	78.7	78.5	76.7	74	73	72.8	72.5	70.7	68	64	52
CM 100-315/90	90	125			100	99.1	98.5	98.5	96.7	94	93	92.8	92.5	90.7	88	84	72
CM 100-315/110	110	150			118	117.5	116.8	116.5	114.7	112	111	110.8	110.5	108.7	106	102	90
CM 100-315/132	132	180			129	128.2	127.6	127.5	125.7	123	122	121.8	121.5	119.7	117	112	101
CM 100-315/160	160	220			148	147.6	147.1	146.5	144.7	142	141	140.8	140.5	138.7	136	132	120

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1

CM SERIES

CM 125

Close-coupled centrifugal pump



TECHNICAL SHEET

Model	**CM**
Capacity	**0–400 m³/h**
Head	**0–151 m**
DN	**32–125 mm**
Speed	**n ≈ 2900 /min**
T max	**120 °C**
Power	**0.75–160 kW**
Voltage	**3~ 380–415 V**
Frequency	**50 Hz**
Class	**Class F**
IP	**IP 55**
Duty	**S1 continuous**
Casing	**Grey cast iron**
Impeller	**Cast iron / AISI 304 / Brass**
Shaft	**45# steel / AISI 304**
Shaft seal	**Mechanical seal**
Bearing	**Grease-lubricated rolling bearings**

MODEL CODE

CM	32	250	7.5
Pump with square motor	Discharge size (mm)	Nominal impeller size (mm)	Rated power (kW)


Example: CM 32-250/7.5

Blank = Single impeller

PERFORMANCE & TECHNICAL DATA

DN 150 × 125 | 50 Hz | n ≈ 2900 /min

Redpump
Italy Standard

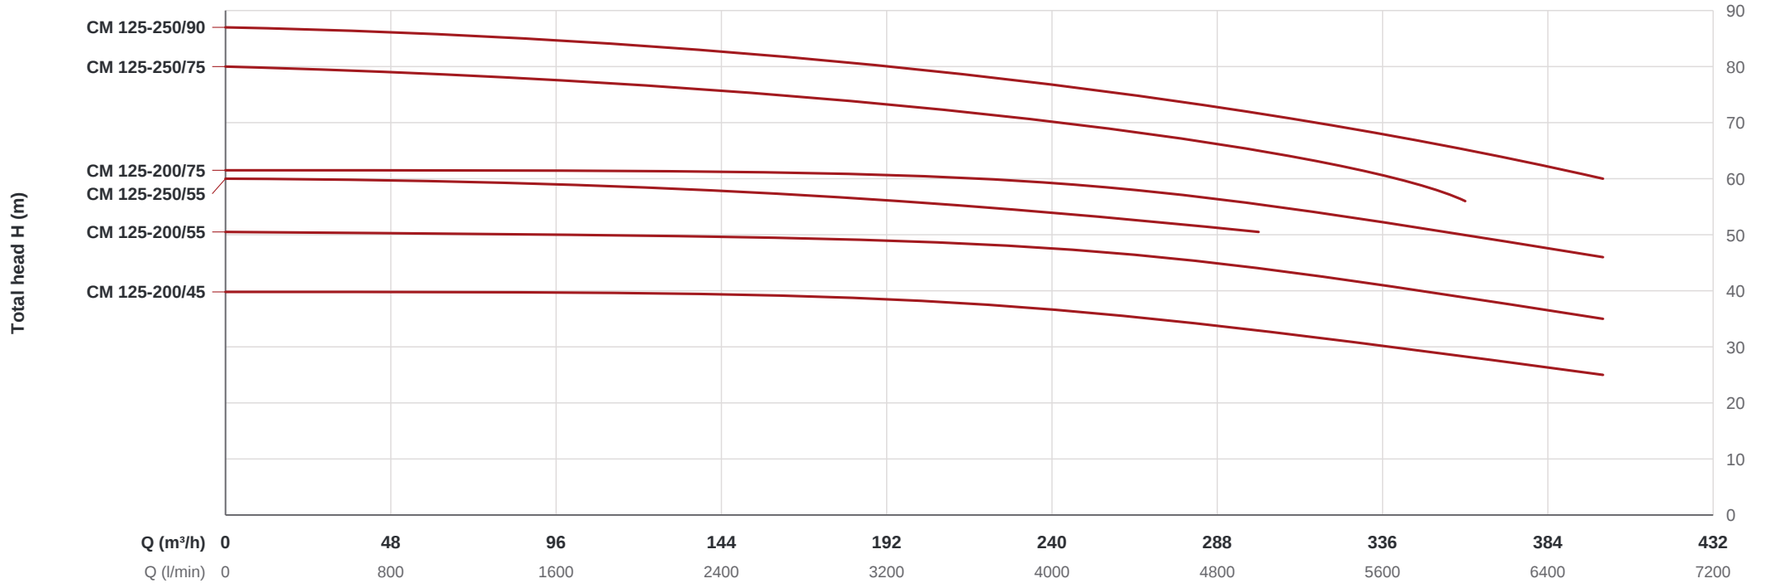

PERFORMANCE DATA

3~ 380–415 V | 50 Hz

MODEL	P_2 kW	P_2 HP	Q	m³/h	0	120	144	180	200	210	220	240	280	300	360	400
				l/min	0	2000	2400	3000	3333	3500	3667	4000	4667	5000	6000	6667
CM 125-200 · DN 150 × 125 mm																
CM 125-200/45	45	60			39.8	39.3	39.2	39	38.9	38.9	38.8	37.5	35	34	28.6	25
CM 125-200/55	55	75	**H (m)**		50.5	49.3	49.2	49	48.9	48.9	48.8	47.5	45	44	38.6	35
CM 125-200/75	75	100			61.5	60.3	60.2	60	59.9	59.9	59.8	58.5	56	55	49.6	46
CM 125-250 · DN 150 × 125 mm																
CM 125-250/55	55	75			60	58.5	57.8	56.6	55.8	55.4	54.9	53.9	51.7	50.5	–	–
CM 125-250/75	75	100	**H (m)**		80	76.5	75.5	74	73	72	71.5	70	67	65	56	–
CM 125-250/90	90	125			87	84	82.5	81	79.5	79	78	77	73.5	71.5	65	60

DESCRIPTION

- New centrifugal pump to EN733 standard
- Available with square or round motor
- YE3 high-efficiency motor, IP55 protection, insulation class F
- Pump casing with anti-corrosion coating
- Galvanized counter flange with bolts, nuts and gaskets
- Quality bearings, wear-resistant mechanical seal

APPLICATIONS

Suitable for use with clean water and liquids that are not chemically aggressive towards the materials from which the pump is made. EN733 centrifugal pumps are recommended for use in water supply, cleaning systems, pressure boosting, firefighting sets, irrigation, industrial applications, water circulation in air-conditioning systems and agriculture.

OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between -10 °C and +50 °C
- Max. working pressure 16 bar
- Continuous duty S1