
AQUARIS
MADE IN ITALY




## ● Performance scope

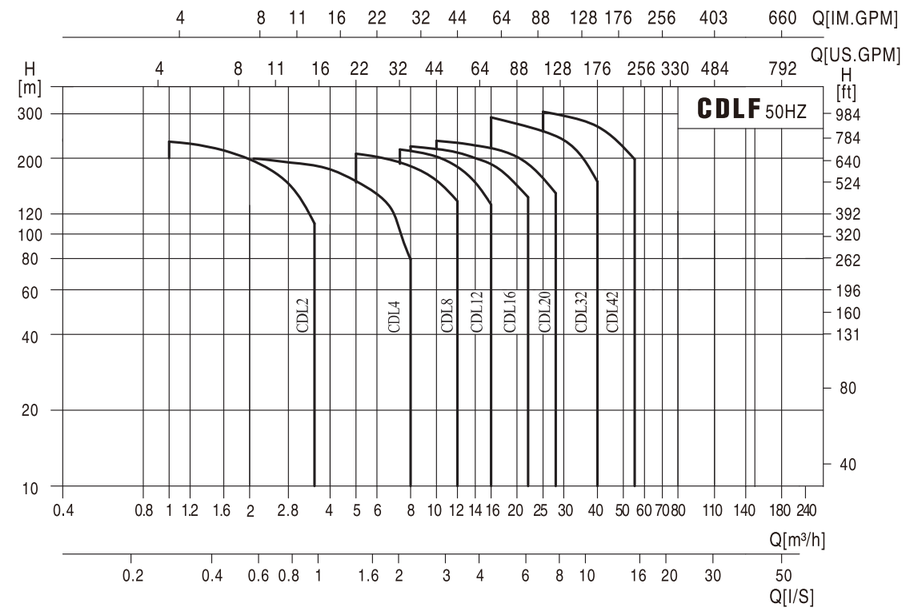


## ● Product range

| Description | CDLF2 | CDLF4 | CDLF8 | CDLF12 | CDLF16 | CDLF20 | CDLF32 | CDLF42 |
|---|---|---|---|---|---|---|---|---|
| Rated flow[m³/h] | 2 | 4 | 8 | 12 | 16 | 20 | 32 | 42 |
| Rated flow[l/s] | 0.56 | 1.1 | 2.2 | 3.3 | 4.4 | 5.6 | 8.9 | 11.7 |
| Flow range[m³/h] | 1-3.5 | 1.5-7 | 5-12 | 7-16 | 8-22 | 10-28 | 16-40 | 25-55 |
| Flow range[l/s] | 0.28-0.97 | 0.42-1.9 | 1.4-3.3 | 1.9-4.4 | 2.2-6.1 | 2.8-7.8 | 4.4-11.1 | 6.9-15.3 |
| Max.pressure[bar] | 23 | 21 | 21 | 22 | 22 | 23 | 29 | 30 |
| Motor power[kW] | 0.37-3 | 0.37-4 | 0.75-7.5 | 1.5-11 | 2.2-15 | 1.1-18.5 | 1.5-30 | 3.0-45 |
| Temperature range[℃] | -15~+120 | | | | | | | |
| Max.efficiency[%] | 46 | 57 | 62 | 63 | 66 | 69 | 73 | 75 |
| Type | | | | | | | | |
| CDLF | ● | ● | ● | ● | ● | ● | ● | ● |
| CDLF Pipe connection | | | | | | | | |
| DIN Flange | Dn25 | Dn32 | Dn40 | DN50 | DN50 | DN50 | DN65 | DN80 |
| Cutting ferrule joint | DN32 | DN32 | DN50 | DN50 | DN50 | DN50 | | |
| Pipe thread | ZG1¼ | ZG1¼ | ZG2 | ZG2 | ZG2 | ZG2 | | |

## ● Pump

CDLF is a kind of vertical non-self priming multistage centrifugal pump, which is driven by a standard electric motor. The motor output shaft directly connects with the pump shaft through a coupling. The pres-sure-resistant cylinder and flow passage components are fixed between pump head and inlet &outlet section with stay bolts. The inlet and outlet are located at the pump bottom at the same plane. This kind of pump can be equipped with an intelligent protector to effectively prevent it from dry-running, out-of-phase and overload.

## ● Motor

Full-enclosed air-blast two-pole standard motor
**Protection class:** IP55
**Insulation class:** F
**Standard voltage:** 50Hz: 1×220-230/240V
3×200-220/346-380V
3×220-240/380-415V
3×380-415V