4" 4SP14 – SUBMERSIBLE PUMP


STAINLESS STEEL SUBMERSIBLE PUMPS

Typical applications:

Water supply system
Booster
Garden and farm irrigation
Lowering underground water level
Various industrial applications

Pump / Motor

Adopted the NEMA standard
Insulation class: B
Protection grade: IP68
Maximum diameterϕ95mm
Highest temperature of liquid: 35°C

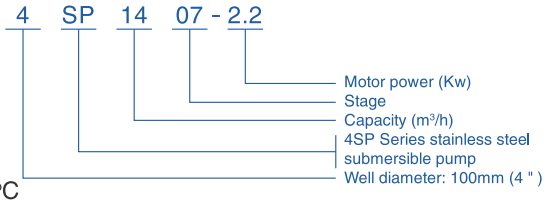




Diffuser height: 50mm

PERFORMANCE TABLE

rpm: 2850 Outlet: G2 "

TYPE	Motor power		Capacity and head							
			l/min	0	83	166	233	266	300	Length
	KW	Hp	m³/h	0	5	10	14	16	18	mm
4SP14-05	1.5	2	Head (m)	34	31	26	22	18	13	415
4SP14-07	2.2	3		47	44	37	31	25	18	515
4SP14-10	3	4		68	62	53	44	36	26	665
4SP14-13	4	5.5		88	81	69	57	47	34	815
4SP14-15	5.5	7.5		102	94	80	66	54	39	915
4SP14-18	5.5	7.5		122	113	96	79	65	47	1065
4SP14-21	7.5	10		142	131	112	93	76	55	1215
4SP14-25	7.5	10		170	157	133	110	90	65	1415

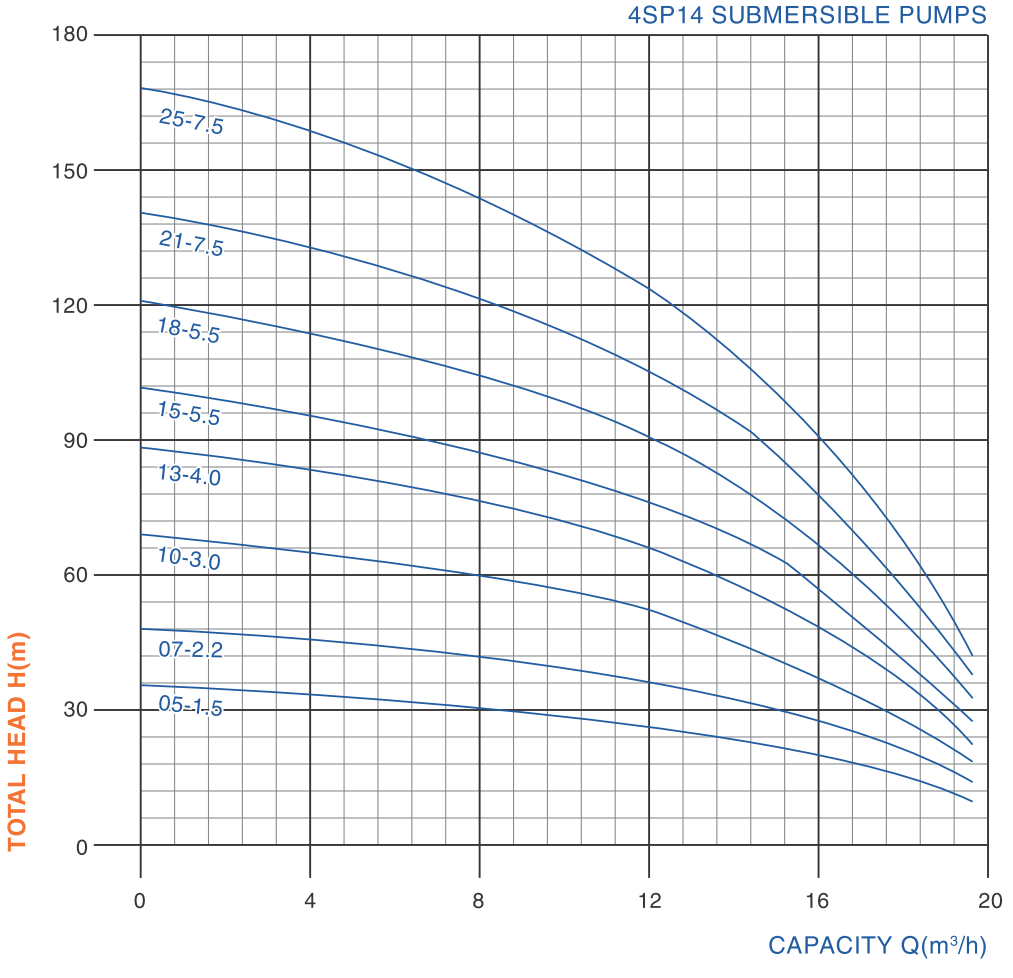

AQUARIS MADE IN ITALY