KTZ SUBMERSIBLE DRAINAGE PUMP

Redpump
Italy Standard

The body of motor and pump is made of rigid cast iron for long-lasting durability.
Greatly increased maximum submersion depth due to mechanical seal resistant to high pressure.
Semi-open impeller made of high chrome alloy match with wear plate(ductile iron) achieves superior durability.
Effective motor cooling due to discharge channel cast as part of the motor housing.Space economically by a top outlet.
Discharge 50mm(2")to 150mm(6"),motor 1.5kW(2HP) to 15kW (20HP).
Hermetically sealed motor equipped built-in thermal protection for the power below 15kW.





Specification

- Capacity:up to 160m^3/h
- Head:up to 57 meters
- Power:1.5kW(2HP) to 15kW(20HP)
  Power supply:three phase 400V ± 10%，50Hz
  380V ± 10%，60Hz
- Insulation class:F
- Protection class:IP68
- Cable length:8m
- Water temperature:up to 40℃
- Max.water depth:25m

Application


- Civil engineering
- Mines,quarries,coal ore & slurries
- Sewage treatment plants
- General pumping purposes


Special features on request

- Other voltages
- The length of cable is optional

Redpump
Italy Standard

SUBMERSIBLE DRAINAGE PUMP KTZ

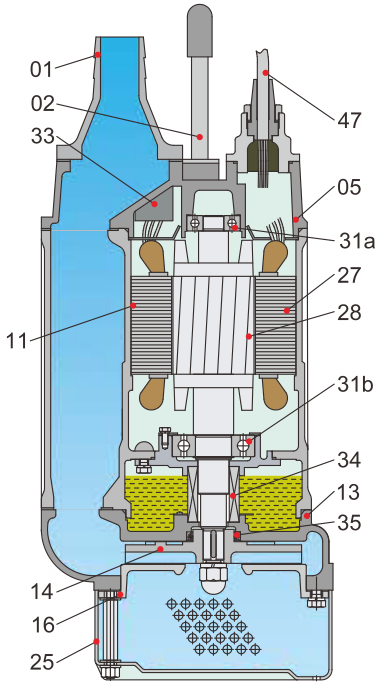

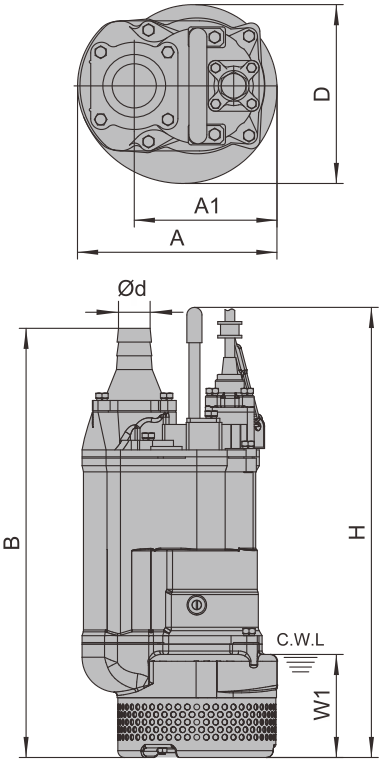

W1:Continuous running water level

Material of construction

Item No.	Part name	Material		Item No.	Part name	Material
01	Hose coupling	Cast iron		28	Rotor	Shaft:AISI420SS
02	Handle	Rubber&steel		31a	Bearing	Ball bearing
05	Upper cover	Cast iron		31b	Bearing	Ball bearing
11	Motor body	Cast iron		33	Motor protector	
13	Pump body	Cast iron		34	Mechanical seal	Sic-Sic/Carbon-Sic(⩽2.2kW) Sic-Sic/Sic-Sic(⩾3.7kW)
14	Impeller	High chrome alloy				
16	Inlet plate	Ductile iron		35	Oil seal	
25	Strainer	Steel		47	Cable	
27	Stator					


Dimensions & weights


Model (50/60Hz)	d	A	A1	B	D	H	W1	N.W	G.W	Packing dimension
	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	mm
KTZ21.5	50	235	173	535	216	505	120	36	40	610x265x265
KTZ31.5	80	235	173	535	216	505	120	36	40	610x265x265
KTZ22.2	50	235	173	535	216	505	120	39	43	610x265x265
KTZ32.2	80	235	173	535	216	505	120	39	43	610x265x265
KTZ23.7	50	283	208	628	252	629	150	63	68	710x320x295
KTZ33.7	80	283	208	628	252	629	150	63	68	710x320x295
KTZ43.7	100	283	208	642	252	629	150	63	68	710x320x295
KTZ35.5	80	283	208	671	252	590	150	77	84	750x350x360
KTZ45.5	100	283	208	686	252	590	150	77	84	750x350x360
KTZ47.5	100	330	240	764	314	676	190	106	116	835x365x385
KTZ67.5	150	330	240	790	314	676	190	108	119	865x365x385
KTZ411	100	373	255	807	350	695	190	136	148	885x415x435
KTZ611	150	373	255	807	350	695	190	139	150	885x415x435
KTZ415	100	373	255	842	350	755	190	144	158	935x415x435
KTZ615	150	373	255	842	350	755	190	146	160	935x415x435

KTZ SUBMERSIBLE DRAINAGE PUMP

Redpump
Italy Standard

Performance curves

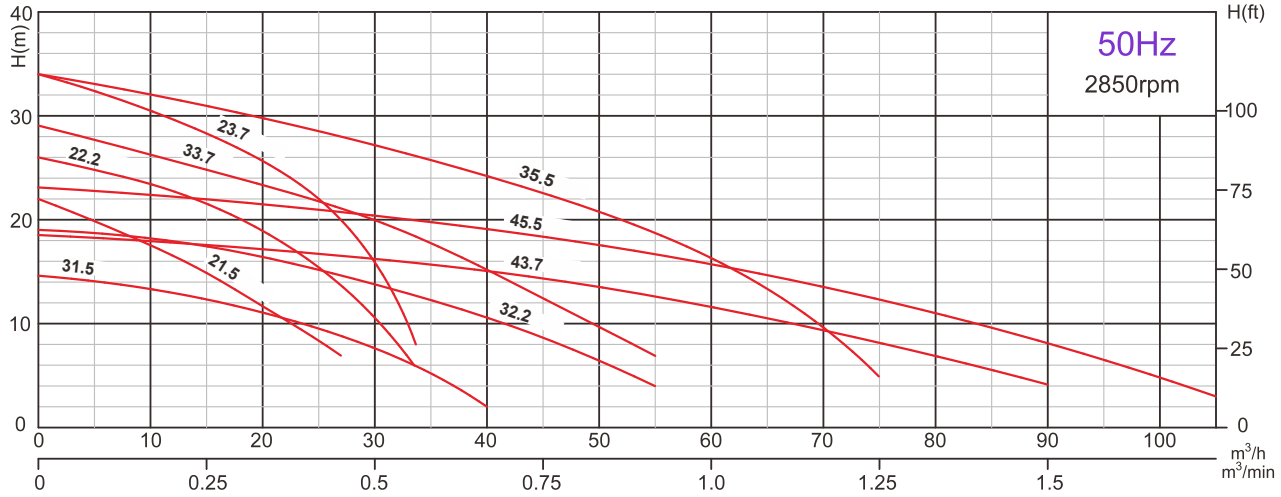

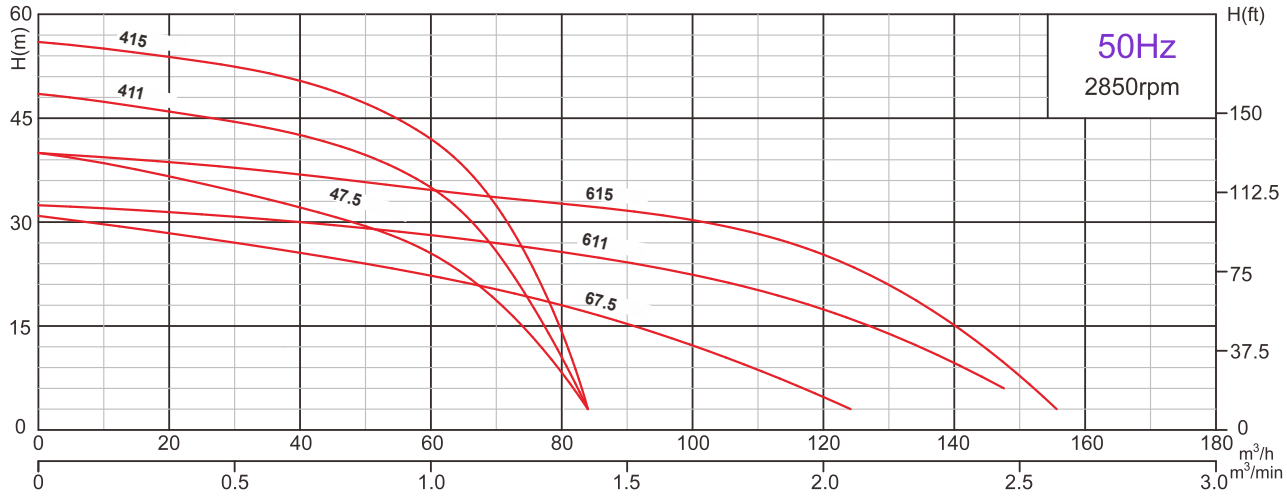


Performance table


Model (50Hz)	Outlet	Motor power		Rated current (400V)	Rated capacity		Rated head	Max capacity		Max Head	Impeller Passage
	mm	kW	HP	A	m³/h	m³/min	m	m³/h	m³/min	m	mm
KTZ21.5	50	1.5	2	3.5	15	0.25	15	27	0.45	22	8.5
KTZ31.5	80	1.5	2	3.5	30	0.50	8	40	0.67	14.5	8.5
KTZ22.2	50	2.2	3	5.0	18	0.30	20	33	0.55	26	8.5
KTZ32.2	80	2.2	3	5.0	36	0.60	11	55	0.92	19	8.5
KTZ23.7	50	3.7	5	7.7	12	0.20	30	33	0.55	34	8.5
KTZ33.7	80	3.7	5	7.7	30	0.50	20	55	0.92	29	8.5
KTZ43.7	100	3.7	5	7.7	60	1.0	11.5	90	1.50	18.5	8.5
KTZ35.5	80	5.5	7.5	11.4	36	0.60	25	75	1.25	34	8.5
KTZ45.5	100	5.5	7.5	11.4	60	1.0	16	105	1.75	23	8.5
KTZ47.5	100	7.5	10	15	48	0.80	30	84	1.40	40	11.5
KTZ67.5	150	7.5	10	15	90	1.50	15	124.8	2.08	31	19.5
KTZ411	100	11	15	22	60	1.0	35	84	1.40	48.5	11.5
KTZ611	150	11	15	22	102	1.70	22	147	2.45	32	19.5
KTZ415	100	15	20	29.5	60	1.0	42	84	1.40	56	11.5
KTZ615	150	15	20	29.5	102	1.70	30	156	2.60	40	19.5

Redpump
Italy Standard

SUBMERSIBLE DRAINAGE PUMP **KTZ**

Performance curves

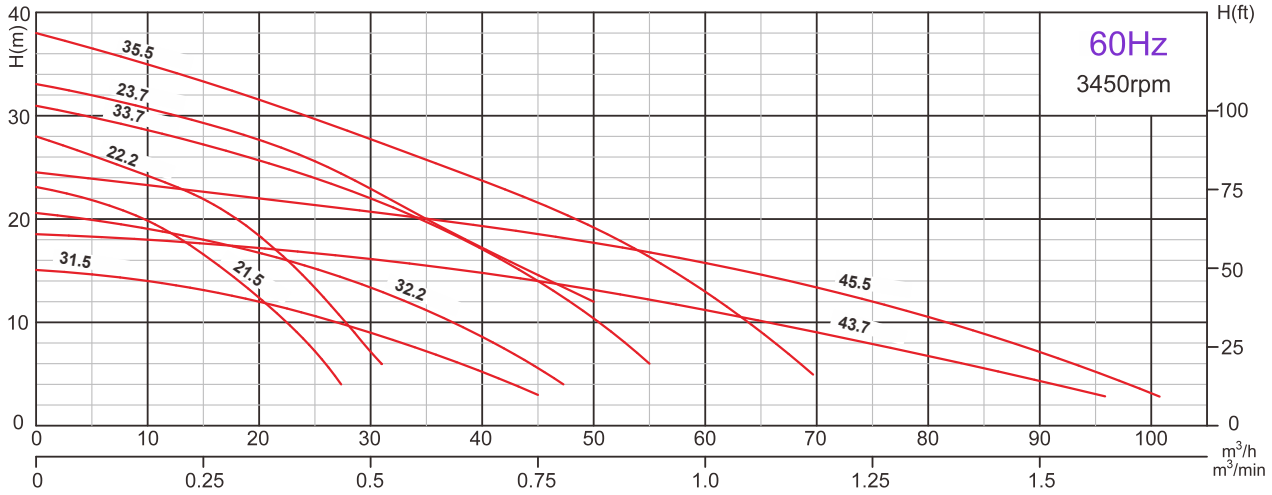

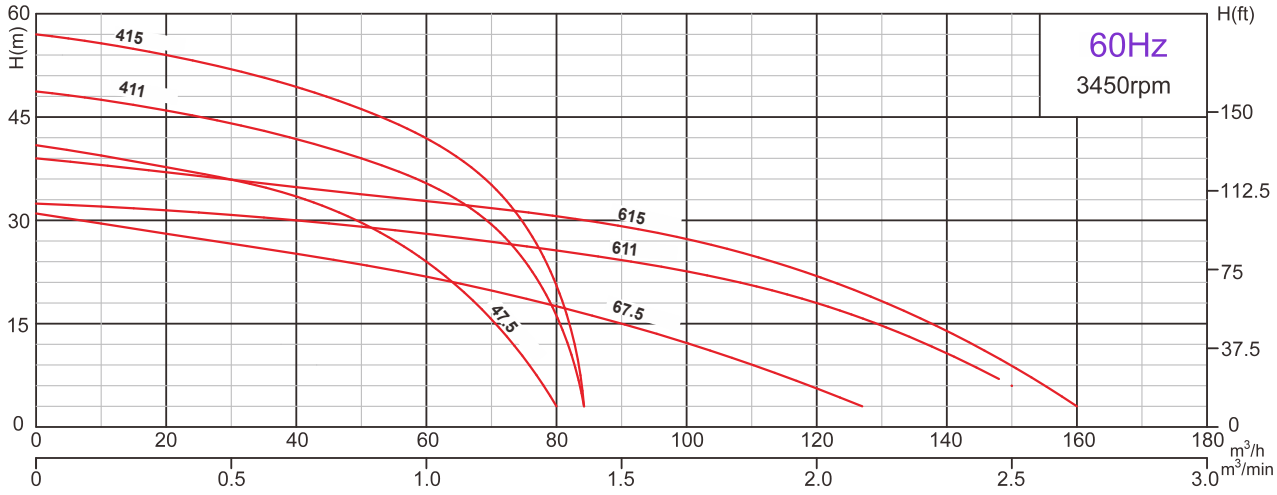

Performance table

Model (60Hz)	Outlet	Motor power		Rated current (380V)	Rated capacity		Rated head	Max capacity		Max Head	Impeller Passage
	mm	kW	HP	A	m³/h	m³/min	m	m³/h	m³/min	m	mm
KTZ21.5	50	1.5	2	3.5	15	0.25	16.5	27	0.45	23	8.5
KTZ31.5	80	1.5	2	3.5	30	0.50	9	45	0.75	15	8.5
KTZ22.2	50	2.2	3	5.1	18	0.30	20	31	0.52	28	8.5
KTZ32.2	80	2.2	3	5.1	30	0.50	13	47	0.78	20.5	8.5
KTZ23.7	50	3.7	5	8.0	12	0.20	30	50	0.83	33	8.5
KTZ33.7	80	3.7	5	8.0	30	0.50	22	55	0.92	31	8.5
KTZ43.7	100	3.7	5	8.0	60	1.0	11.5	96	1.60	18.5	8.5
KTZ35.5	80	5.5	7.5	11.6	36	0.60	25	69	1.15	38	8.5
KTZ45.5	100	5.5	7.5	11.6	60	1.0	16	102	1.70	24.4	8.5
KTZ47.5	100	7.5	10	15.4	48	0.80	30	80	1.33	41	11.5
KTZ67.5	150	7.5	10	15.4	90	1.50	15	127	2.12	31	19.5
KTZ411	100	11	15	22.5	60	1.0	35	84	1.40	48.5	11.5
KTZ611	150	11	15	22.5	102	1.70	22	147	2.45	32	19.5
KTZ415	100	15	20	30	60	1.0	42	84	1.40	57	11.5
KTZ615	150	15	20	30	102	1.70	27	160	2.67	39	19.5

LH

SUBMERSIBLE DRAINAGE PUMP

Redpump
Italy Standard

The body of motor and pump is made of hard cast iron for long-lasting durability.
Greatly increased maximum submersion depth due to mechanical seal resistant to high pressure.
Hydraulic part under the motor and motor cooled by the pumped water for safe operation also with the pump only partially immersed.The top outlet design maximize the space.
Hermetically sealed motor equipped.
Discharge 100mm(4") to 200mm(8"),motor 22kW (30HP) to 110 kW (150HP).
Motor is dry type submersible induction motor (2 poles).

Application

- Deep-well pre-dewatering or high-head dewatering
- Civil engineering and construction works
- Mines,quarries,coal ore &slurries
- Sewage treatment plants
- General pumping purposes



Specification


- Capacity:up to 408m³/h
- Head:up to 205 meters
- Power:22kW (30HP) to 110 kW (150HP)
- Power supply:three phase 400V ± 10%,50Hz
  380V±10%,60Hz
- Insulation class: F
- Protection class: IP68
- Cable length: 20m
- Water temperature:up to 40℃
- Max. water depth: 30m

Special features on request


- Other voltages
- The length of cable is optional

Redpump
Italy Standard

SUBMERSIBLE DRAINAGE PUMP LH

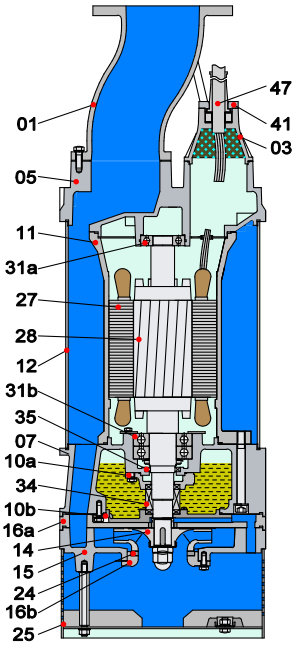

22-75kW

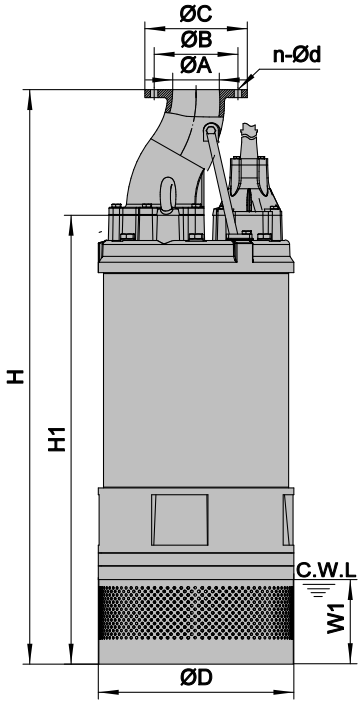

C.W.L:Continuous running water level

Material of construction

Item No.	Part name	Material		Item No.	Part name	Material
01	Hose coupling	Ductile iron		16b	Inlet plate	Cast iron
03	Terminal box	Cast iron		24	Neck ring	High chrome alloy
05	Upper cover	Cast iron		25	Strainer	AISI304SS
07	Bearing house	Cast iron		27	Stator	
10a	Seal bracket	Cast iron		28	Rotor	Shaft:AISI420SS
10b	Seal bracket	Cast iron		31a	Bearing	Ball bearing
11	Motor body	Cast iron		31b	Bearing	Ball bearing
12	Outer casing	Steel		34	Mechanical seal	Tc-Sic/Sic-Sic
14	Impeller	High chrome alloy		35	Oil seal	
15	Diffuser	Ductile iron		41	Shim	Cast iron
16a	Inlet plate	Ductile iron		47	Cable	

Dimensions & weights


Model (50/60Hz)	A	B	C	n-Ød	D	H	H1	W1	N.W	G.W	Packing dimension
	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	mm
LH422	100	180	220	8-Ø17.5	420	1374	1072	240	370	410	1495x490x700
LH430	100	180	220	8-Ø17.5	420	1374	1072	240	375	415	1495x490x700
LH622	150	240	285	8-Ø22	420	1434	1082	250	385	425	1565x490x700
LH630	150	240	285	8-Ø22	420	1434	1082	250	390	430	1565x490x700
LH637	150	240	285	8-Ø22	530	1424	1072	180	570	615	1555x600x850
LH645	150	240	285	8-Ø22	530	1424	1072	180	575	620	1555x600x850
LH837	200	295	340	12-Ø22	530	1474	1072	180	575	625	1605x600x850
LH845	200	295	340	12-Ø22	530	1474	1072	180	580	630	1605x600x850
LH655	150	240	285	8-Ø22	550	1630	1280	200	830	880	1765x620x910
LH675	150	240	285	8-Ø22	550	1630	1280	200	830	880	1765x620x910
LH855	200	295	340	12-Ø22	550	1680	1280	200	880	930	1815x620x910
LH875	200	295	340	12-Ø22	550	1680	1280	200	880	930	1815x620x910
LH690	150	250	300	8-Ø26	592	1687	1282	200	1110	1166	1825x665x965
LH890	200	295	340	12-Ø22	592	1687	1282	200	1120	1176	1825x665x965
LH6110	150	250	300	8-Ø26	592	1793	1388	370	1245	1301	1875x665x965
LH8110	200	295	340	12-Ø22	592	1687	1282	200	1150	1206	1825x665x965


LH


SUBMERSIBLE DRAINAGE PUMP


Redpump
Italy Standard

Performance curves

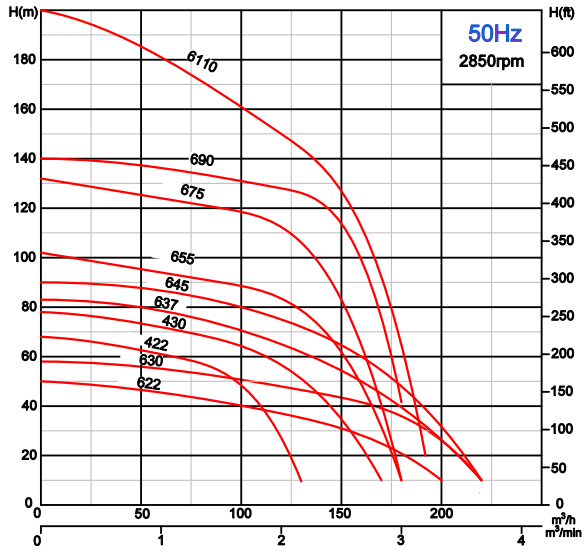

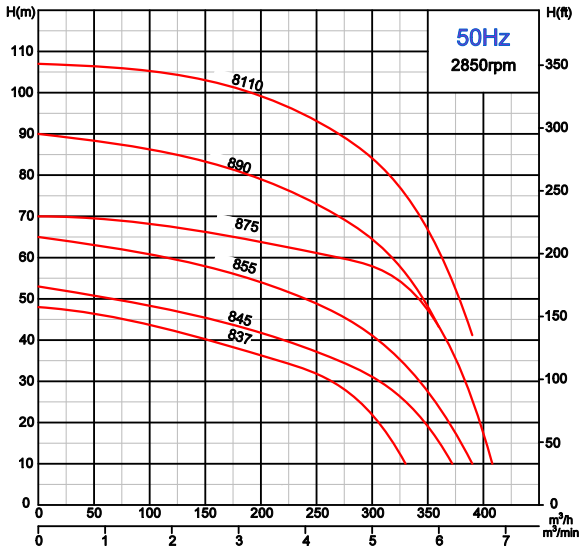

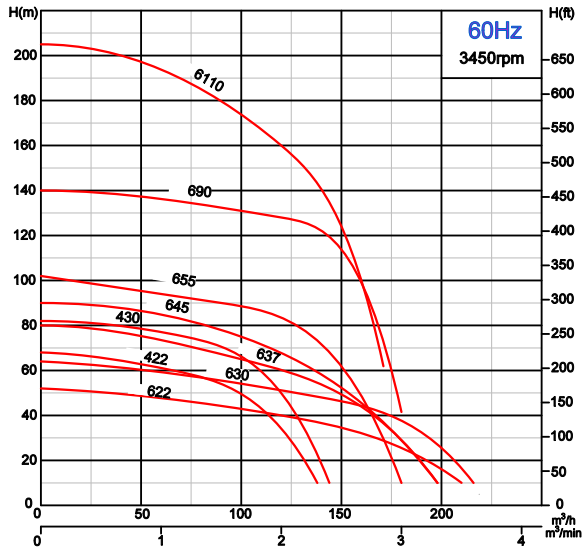

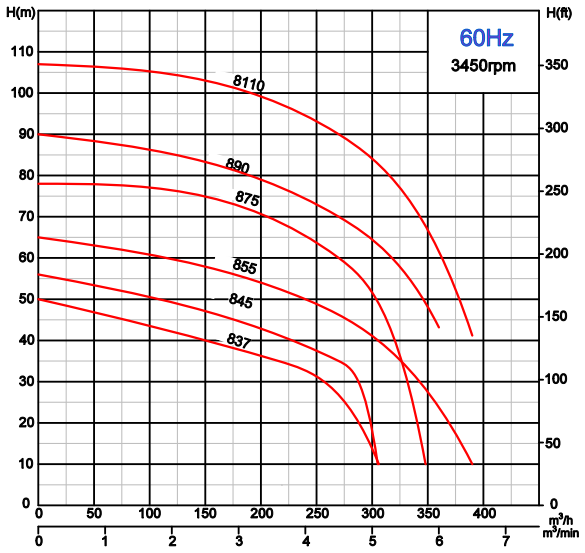

Performance table

Model (50/60Hz)	Outlet	Motor power		Rated current	Rated capacity		Rated Head	Max capacity		Max Head	Impeller Passage
	mm	kW	HP	A	m³/h	m³/min	m	m³/h	m³/min	m	mm
LH422	100	22	30	41.5	66	1.1	60	130/138	2.17/2.3	68	6
LH430	100	30	40	54	72	1.2	70/75	170/144	2.83/2.4	78/82	6
LH622	150	22	30	41.5	120	2.0	37/40	200/210	3.33/3.5	50/52	15
LH630	150	30	40	54	140	2.33	45/48	220/216	3.67/3.6	58/64	15
LH637	150	37	50	66	120/100	2.0/1.7	65	220/198	3.67/3.3	83/80	6
LH645	150	45	60	80	120/100	2.0/1.7	75	220/198	3.67/3.3	90	6
LH837	200	37	50	66	216	3.6	35	330/306	5.5/5.1	48/50	20
LH845	200	45	60	80	270	4.5	35	372/305	6.2/5.1	53/56	20
LH655	150	55	75	100	90	1.5	90	180	3.0	102	8
LH675	150	75	100	134	90	1.5	120	180/168	3.0/2.8	132	8
LH855	200	55	75	100	240	4.0	50	390	6.5	65	20
LH875	200	75	100	134	270	4.5	60	408/348	6.8/5.8	70/78	20
LH690	150	90	120	162	120	2.0	128	180	3.0	140	10
LH890	200	90	120	162	270	4.5	70	360	6.0	90	20
LH6110	150	110	150	198	120	2.0	150/160	192/171	3.2/2.85	200/205	8
LH8110	200	110	150	198	270	4.5	90	390	6.5	107	20

- **Starting Method: Star-Delta**