
# FS

**FS SERIES · AISI 304 SUBMERSIBLE ELECTRIC PUMPS · LIGHT SEWAGE · 50 Hz · n ≈ 2850 /min**

AQUARIS
MADE IN ITALY



| 0.55–2.2 kW | 48 m³/h | 15.5 m | n ≈ 2850 /min | Ø 38–50 mm |
|---|---|---|---|---|
| POWER | FLOW UP TO | HEAD UP TO | SPEED | SOLIDS PASSAGE |

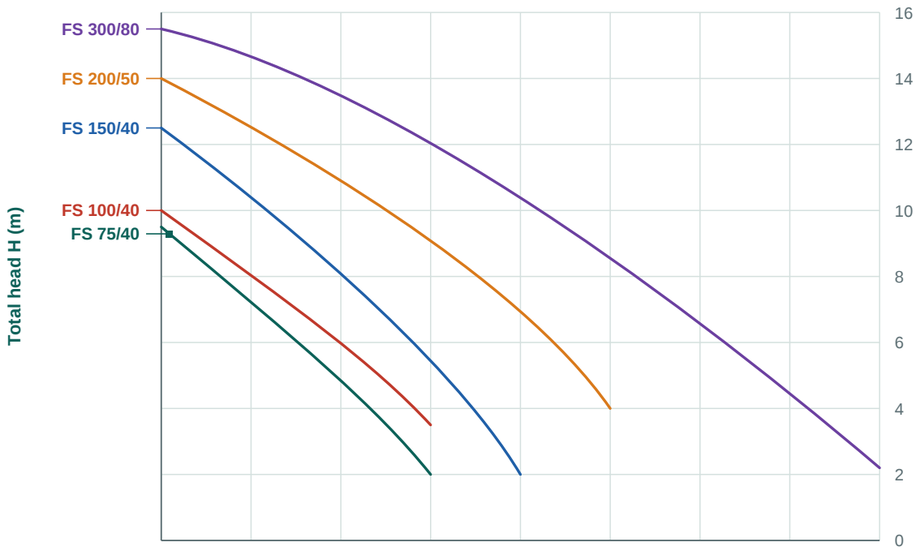



## PRODUCT NOMENCLATURE

Example: FS 200/50 M (single-phase)

| | |
|---|---|
| **FS** | Light sewage |
| **200** | Motor power (200 = 2 HP) |
| **M / T** | M = single-phase · T = three-phase |

## DIMENSIONS (MM)

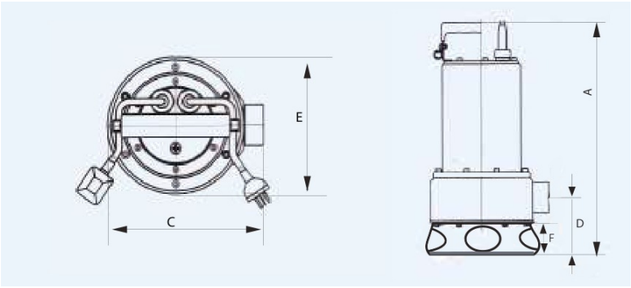


Impeller: closed single-channel

## USES

FS series submersible electric pumps are widely used in domestic, workshop and industrial systems for handling clean or slightly dirty water and other liquids. They are also suitable for pumping aggressive liquids. Using the pump with combustible liquids is strictly prohibited. Never position or lift the pump by its power cable.
Maximum liquid temperature: 50 °C (continuous duty).
Minimum pumping level: 10 cm above the pump body.
Maximum liquid density: 1.100 kg/dm³.
The pumps can handle liquids containing solids up to the diameter that passes through the impeller (see technical data).

## CONSTRUCTION

The components are carefully selected for maximum reliability and long service life, even in the most demanding applications. The pumps are made entirely of AISI 304 stainless steel, with a stainless steel motor shaft and oil-resistant nitrile rubber gaskets. The high-quality bearings need regreasing only after a long period of operation. Mechanical seal in silicon carbide/alumina. The upper seal is a lip seal (oil seal).

## ELECTRIC MOTOR

Two-pole single-phase or three-phase electric motor with die-cast aluminium rotor, running in a bath of dielectric, anti-oxidant oil. Power range: 0.55 kW to 2.2 kW. Voltage: single-phase 220–240 V, 50 Hz; three-phase 380–415 V, 50 Hz. The motors deliver full rated power with variations of ±5 % in rated frequency or voltage. They are fully watertight, with insulation class F and IP68 protection. Single-phase motors are fitted with safety micro-thermostats to prevent motor damage if the impeller is blocked. The motor is cooled by the liquid in which the pump is immersed. Supplied as standard with 10 m of H 07 RN-F cable and a Schuko plug; three-phase versions are supplied with free cable ends. Motor protection for three-phase pumps must be provided by the user.

## PERFORMANCE DATA

| MODEL<br>3~ 380–415 V / 1~ 220–240 V | | $P_2$ kW | $P_2$ HP | Q m³/h<br>l/min | 0<br>0 | 6<br>100 | 12<br>200 | 18<br>300 | 24<br>400 | 30<br>500 | 36<br>600 | 42<br>700 | 48<br>800 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **FS 75/40T**<br>FS 75/40M | 3~<br>1~ | 0.55 | 0.75 | H (m) | 9.5 | 7 | 5 | 2 | – | – | – | – | – |
| **FS 100/40T**<br>FS 100/40M | 3~<br>1~ | 0.75 | 1 | | 10 | 8 | 6 | 3.5 | – | – | – | – | – |
| **FS 150/40T**<br>FS 150/40M | 3~<br>1~ | 1.1 | 1.5 | | 12.5 | 10.5 | 8 | 5.5 | 2 | – | – | – | – |
| **FS 200/50T**<br>FS 200/50M | 3~<br>1~ | 1.5 | 2 | | 14 | 12.5 | 11 | 9 | 7 | 4 | – | – | – |
| **FS 300/80T**<br>FS 300/80M | 3~<br>1~ | 2.2 | 3 | | 15.5 | 14.5 | 13.5 | 12 | 10.5 | 8.5 | 6.5 | 4.5 | 2.2 |

## ELECTRICAL DATA AND DIMENSIONS

| MODEL<br>M = 1~ / T = 3~ | RATED CURRENT (A)<br>1~ 230 V | <br>3~ 400 V | CAPACITOR<br>µF | CABLE<br>1~ mm² | <br>3~ mm² | <br>m | DIMENSIONS (mm)<br>A | <br>C | <br>D | <br>E | <br>F | SOLIDS<br>Ø mm | PACKING (mm)<br>L | <br>H | <br>P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **FS 75/40 M-T** | 3.6 | 1.3 | 16 | 3x1 | 4x1 | 10 | 397 | 204 | 105 | 190 | 68 | Ø 38 | 180 | 390 | 240 |
| **FS 100/40 M-T** | 4.7 | 1.7 | 25 | 3x1 | 4x1 | 10 | 421 | 204 | 105 | 190 | 68 | Ø 38 | 180 | 420 | 240 |
| **FS 150/40 M-T** | 6.0 | 2.5 | 30 | 3x1 | 4x1 | 10 | 421 | 204 | 105 | 190 | 68 | Ø 38 | 180 | 420 | 240 |
| **FS 200/50 M-T** | 7.2 | 3.2 | 30 | 3x1 | 4x1 | 10 | 486 | 206 | 127 | 200 | 80 | Ø 50 | 200 | 480 | 240 |
| **FS 300/80 M-T** | 8.0 | 4.7 | 30 | 3x1 | 4x1.5 | 10 | 486 | 226 | 134 | 200 | 80 | Ø 50 | 200 | 480 | 240 |



Table values are averages for production models. The company reserves the right to make changes of any kind without prior notice.