# 3M SERIES

AQUARIS MADE IN ITALY

3M SERIES · PRODUCT OVERVIEW & CONSTRUCTION · STAINLESS STEEL STANDARD PUMP · 50 Hz · n ≈ 2900 /min



| 1.1–37 kW | DN 32–80 mm | 240 m³/h | 72 m | n ≈ 2900 /min | 3~ 380–415 V |
|---|---|---|---|---|---|
| POWER | DISCHARGE | MAX. FLOW RATE | MAX. HEAD | SPEED | MOTOR |

## DESCRIPTION

- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

## OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1


## APPLICATIONS

Clean water · Domestic · Civil · Industrial

## PRODUCT NOMENCLATURE

Example: 3M 32-200/5.5

| | |
|---|---|
| 3M | Stainless steel standard pump |
| 32 | Discharge size (mm) |
| 200 | Nominal impeller size (mm) |
| 5.5 | Rated power (kW) |

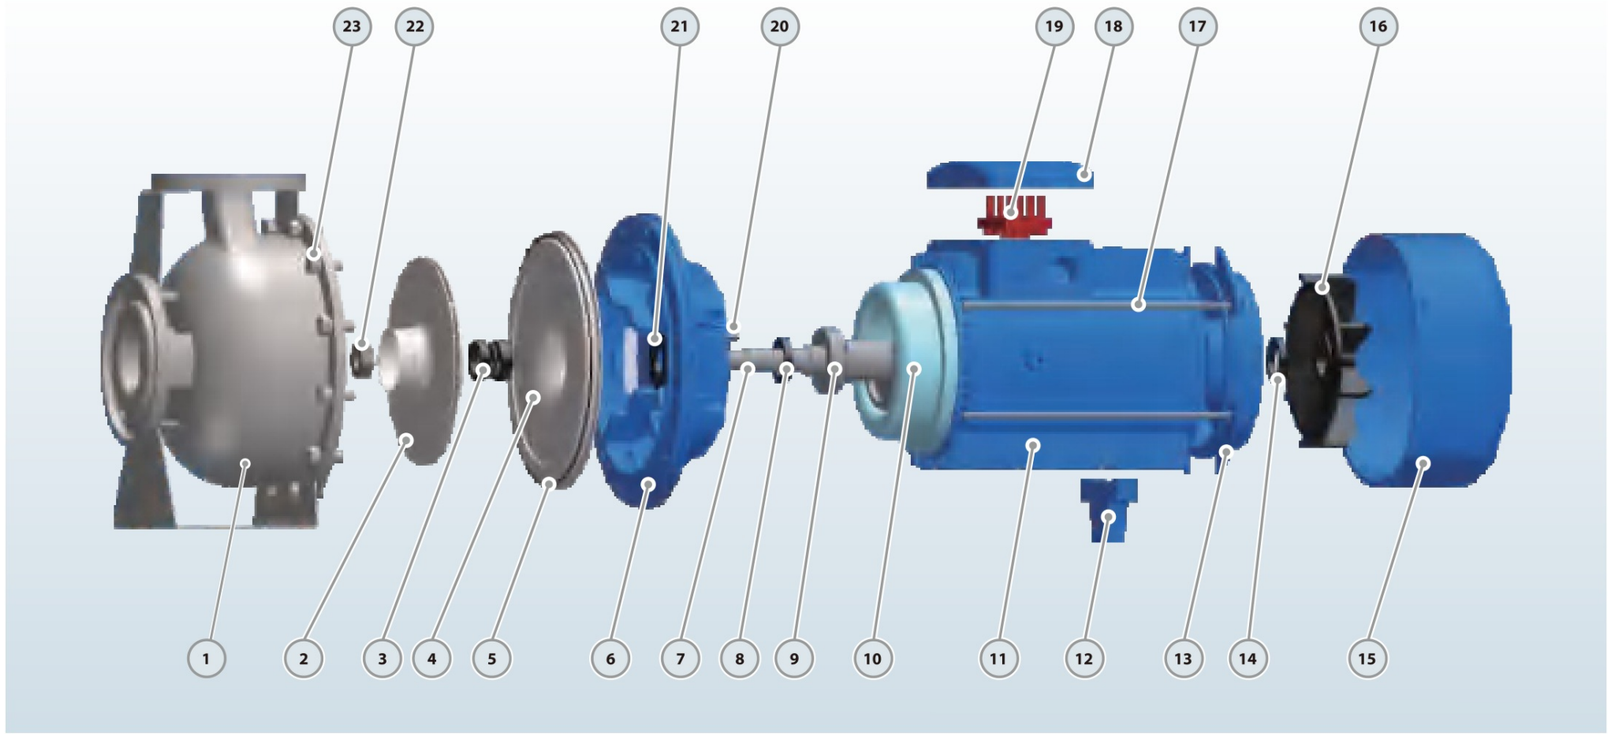


## CONSTRUCTION AND MATERIALS

| | | | | | |
|---|---|---|---|---|---|
| 1 | Pump casing | SS304 | 13 | Back cover | Cast iron |
| 2 | Impeller | SS304 | 14 | Reinforced seal | Rubber |
| 3 | Mechanical seal | SiC/Carbon/SS304 | 15 | Fan cover | Aluminum |
| 4 | Baffle plate | SS304 | 16 | Fan | Plastic |
| 5 | O-ring | Rubber | 17 | Through bolt | Steel |
| 6 | Connection | Cast iron | 18 | Terminal box | Aluminum |
| 7 | Shaft | SS304 | 19 | Terminal board | Plastic |
| 8 | Reinforced seal | Rubber | 20 | Impeller key | Iron |
| 9 | Bearing | Ball bearing | 21 | Water deflector | Rubber |
| 10 | Wound stator/rotor | Silicon/Copper | 22 | Impeller nut | Galvanized steel |
| 11 | Motor housing | Aluminum | 23 | Connection bolt | Steel |
| 12 | Support foot | Plastic | | | |

## RANGE OVERVIEW

| SIZE | DN mm | POWER kW | Q MAX m³/h | H MAX m |
|---|---|---|---|---|
| **3M 32** | 50 × 32 | 1.1–5.5 | 24 | 70.5 |
| **3M 40** | 65 × 40 | 1.5–11 | 42 | 72 |
| **3M 50** | 65 × 50 | 2.2–15 | 72 | 72 |
| **3M 65** | 80 × 65 | 4–22 | 138 | 67 |
| **3M 80** | 100 × 80 | 11–37 | 240 | 66 |

# 3M 32

**3M SERIES · STAINLESS STEEL STANDARD PUMP · 50 Hz · n ≈ 2900 /min**

AQUARIS
MADE IN ITALY



| 1.1–5.5 kW | DN 50 × 32 mm | 24 m³/h | 70.5 m | n ≈ 2900 /min | 3~ 380–415 V |
|---|---|---|---|---|---|
| POWER | SUCTION × DISCHARGE | MAX. FLOW RATE | MAX. HEAD | SPEED | MOTOR |

## DESCRIPTION


- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

## OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

## MATERIALS

| | | |
|---|---|---|
| 1 | Pump casing | SS304 |
| 2 | Impeller | SS304 |
| 3 | Mechanical seal | SiC/Carbon/SS304 |
| 4 | Baffle plate | SS304 |
| 5 | O-ring | Rubber |
| 6 | Connection | Cast iron |
| 7 | Shaft | SS304 |
| 8 | Reinforced seal | Rubber |

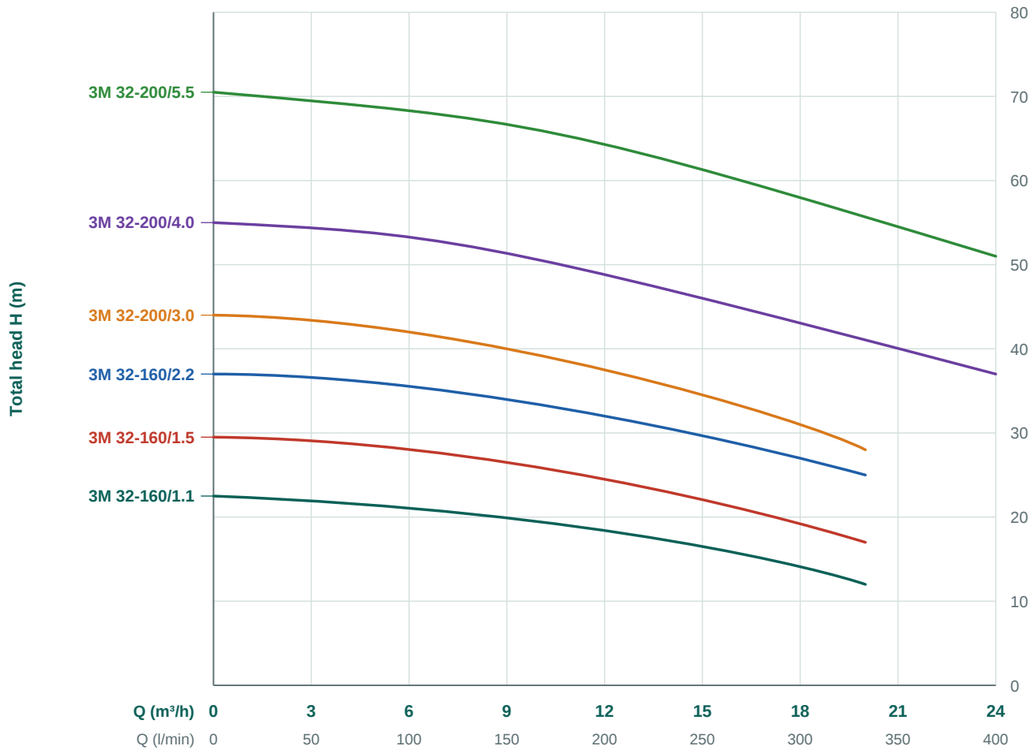


## PRODUCT NOMENCLATURE

Example: 3M 32-200/5.5

| | |
|---|---|
| 3M | Stainless steel standard pump |
| 32 | Discharge size (mm) |
| 200 | Nominal impeller size (mm) |
| 5.5 | Rated power (kW) |

## MOTOR

Three-phase 3~ 380–415 V
50 Hz
n ≈ 2900 /min

## APPLICATIONS

Clean water · Domestic · Civil · Industrial

## PERFORMANCE DATA

| MODEL | DN | $P_2$ | | Q m³/h | 0 | 9 | 12 | 18 | 20 | 24 |
|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | mm | kW | HP | l/min | 0 | 150 | 200 | 300 | 333 | 400 |
| 3M 32-160/1.1 | 50x32 | 1.1 | 1.5 | H (m) | 22.5 | 19.9 | 18.4 | 14.1 | 12 | – |
| 3M 32-160/1.5 | 50x32 | 1.5 | 2 | | 29.5 | 26.5 | 24.5 | 19.2 | 17 | – |
| 3M 32-160/2.2 | 50x32 | 2.2 | 3 | | 37 | 34 | 32 | 27 | 25 | – |
| 3M 32-200/3.0 | 50x32 | 3 | 4 | | 44 | 40 | 37.5 | 31 | 28 | – |
| 3M 32-200/4.0 | 50x32 | 4 | 5.5 | | 55 | 52 | 49.5 | 43.5 | 40.5 | 37 |
| 3M 32-200/5.5 | 50x32 | 5.5 | 7.5 | | 70.5 | 67.5 | 65 | 58.5 | 55 | 51 |

# 3M 40

**3M SERIES · STAINLESS STEEL STANDARD PUMP · 50 Hz · n ≈ 2900 /min**

AQUARIS
MADE IN ITALY



| 1.5–11 kW | DN 65 × 40 mm | 42 m³/h | 72 m | n ≈ 2900 /min | 3~ 380–415 V |
|---|---|---|---|---|---|
| POWER | SUCTION × DISCHARGE | MAX. FLOW RATE | MAX. HEAD | SPEED | MOTOR |

## DESCRIPTION


- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

## OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

## MATERIALS

| | | |
|---|---|---|
| 1 | Pump casing | SS304 |
| 2 | Impeller | SS304 |
| 3 | Mechanical seal | SiC/Carbon/SS304 |
| 4 | Baffle plate | SS304 |
| 5 | O-ring | Rubber |
| 6 | Connection | Cast iron |
| 7 | Shaft | SS304 |
| 8 | Reinforced seal | Rubber |

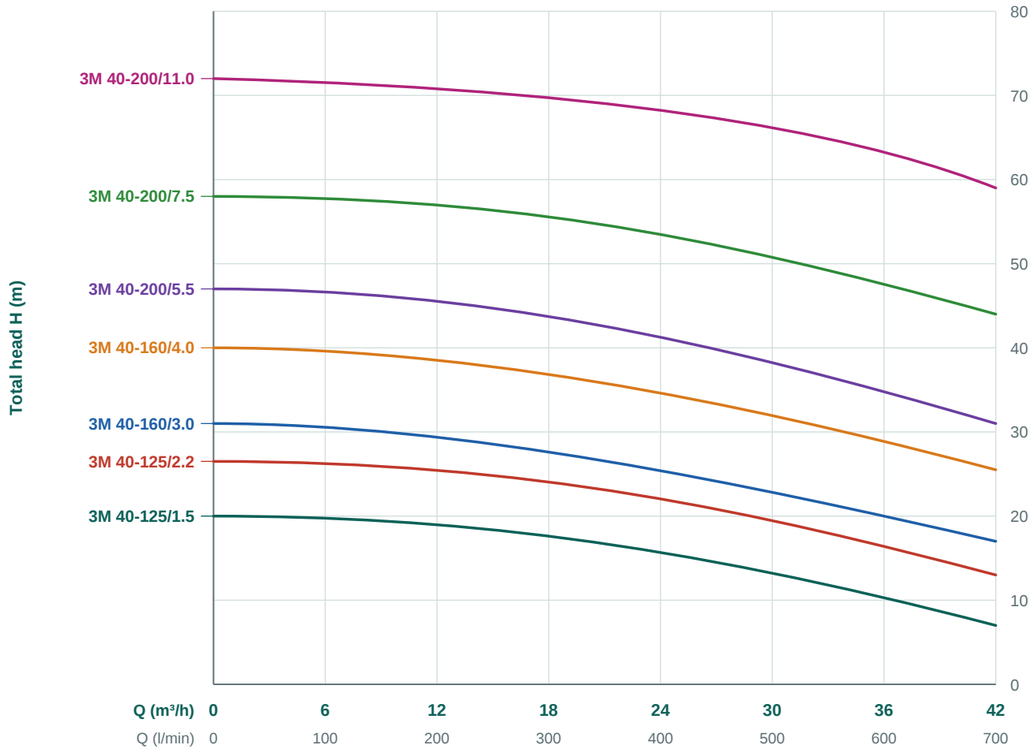


## PRODUCT NOMENCLATURE

Example: 3M 40-200/11.0

| | |
|---|---|
| 3M | Stainless steel standard pump |
| 40 | Discharge size (mm) |
| 200 | Nominal impeller size (mm) |
| 11.0 | Rated power (kW) |

## MOTOR

Three-phase 3~ 380–415 V
50 Hz
n ≈ 2900 /min

## APPLICATIONS

Clean water · Domestic · Civil · Industrial

## PERFORMANCE DATA

| MODEL | DN | $P_2$ | | Q m³/h | 0 | 12 | 18 | 20 | 24 | 36 | 42 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | mm | kW | HP | l/min | 0 | 200 | 300 | 333 | 400 | 600 | 700 |
| 3M 40-125/1.5 | 65x40 | 1.5 | 2 | | 20 | 19 | 17.6 | 17 | 15.7 | 10.3 | 7 |
| 3M 40-125/2.2 | 65x40 | 2.2 | 3 | | 26.5 | 25.5 | 24 | 23.5 | 22 | 16.4 | 13 |
| 3M 40-160/3.0 | 65x40 | 3 | 4 | | 31 | 29.5 | 27.5 | 27 | 25.5 | 20 | 17 |
| 3M 40-160/4.0 | 65x40 | 4 | 5.5 | H (m) | 40 | 38.5 | 37 | 36 | 34.5 | 29 | 25.5 |
| 3M 40-200/5.5 | 65x40 | 5.5 | 7.5 | | 47 | 45.5 | 44 | 43 | 41 | 35 | 31 |
| 3M 40-200/7.5 | 65x40 | 7.5 | 10 | | 58 | 57 | 55.5 | 55 | 53.5 | 47.5 | 44 |
| 3M 40-200/11.0 | 65x40 | 11 | 15 | | 72 | 71 | 70 | 69 | 68.5 | 63 | 59 |

# 3M 50

**3M SERIES · STAINLESS STEEL STANDARD PUMP · 50 Hz · n ≈ 2900 /min**

AQUARIS
MADE IN ITALY



| 2.2–15 kW | DN 65 × 50 mm | 72 m³/h | 72 m | n ≈ 2900 /min | 3~ 380–415 V |
|---|---|---|---|---|---|
| POWER | SUCTION × DISCHARGE | MAX. FLOW RATE | MAX. HEAD | SPEED | MOTOR |

## DESCRIPTION


- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

## OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

## MATERIALS

| | | |
|---|---|---|
| 1 | Pump casing | SS304 |
| 2 | Impeller | SS304 |
| 3 | Mechanical seal | SiC/Carbon/SS304 |
| 4 | Baffle plate | SS304 |
| 5 | O-ring | Rubber |
| 6 | Connection | Cast iron |
| 7 | Shaft | SS304 |
| 8 | Reinforced seal | Rubber |

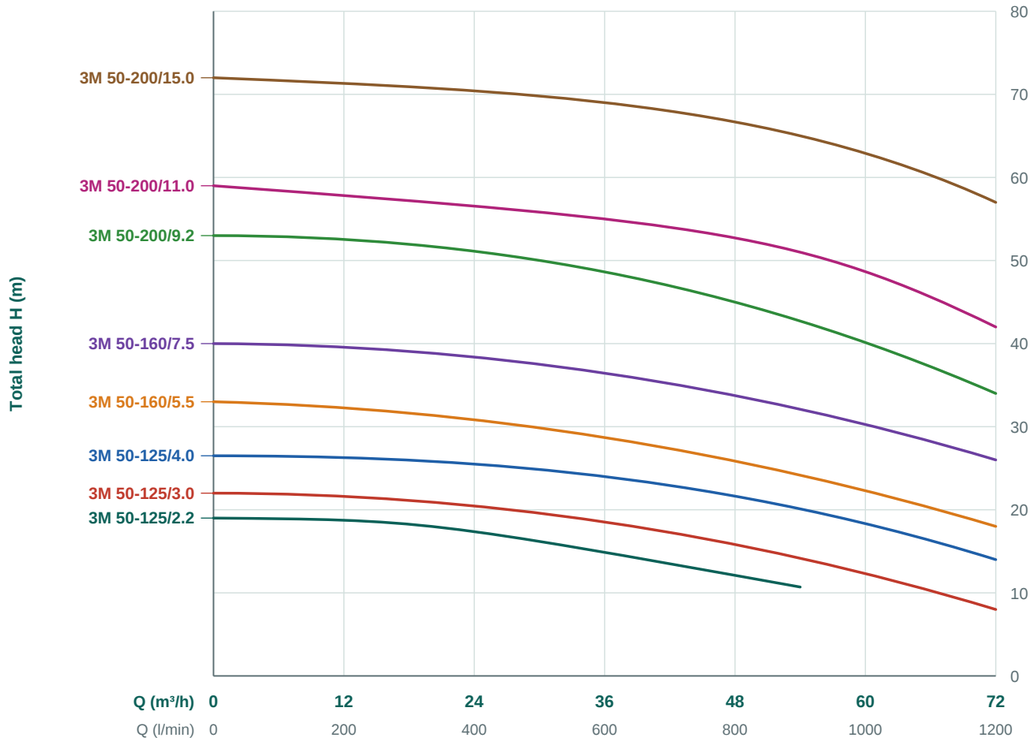


## PRODUCT NOMENCLATURE

Example: 3M 50-200/15.0

| | |
|---|---|
| 3M | Stainless steel standard pump |
| 50 | Discharge size (mm) |
| 200 | Nominal impeller size (mm) |
| 15.0 | Rated power (kW) |

## MOTOR

Three-phase 3~ 380–415 V
50 Hz
n ≈ 2900 /min

## APPLICATIONS

Clean water · Domestic · Civil · Industrial

## PERFORMANCE DATA

| MODEL | DN | $P_2$ | | Q m³/h | 0 | 24 | 36 | 42 | 54 | 72 |
|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | mm | kW | HP | l/min | 0 | 400 | 600 | 700 | 900 | 1200 |
| 3M 50-125/2.2 | 65x50 | 2.2 | 3 | H (m) | 19 | 17.5 | 14.9 | 13.4 | 10.7 | – |
| 3M 50-125/3.0 | 65x50 | 3 | 4 | | 22 | 20.5 | 18.4 | 17 | 14.4 | 8 |
| 3M 50-125/4.0 | 65x50 | 4 | 5.5 | | 26.5 | 26 | 24 | 22.5 | 20.5 | 14 |
| 3M 50-160/5.5 | 65x50 | 5.5 | 7.5 | | 33 | 31 | 28.5 | 27 | 24.5 | 18 |
| 3M 50-160/7.5 | 65x50 | 7.5 | 10 | | 40 | 38.5 | 36 | 35 | 32.5 | 26 |
| 3M 50-200/9.2 | 65x50 | 9.2 | 12.5 | | 53 | 51 | 49 | 47.5 | 44.5 | 34 |
| 3M 50-200/11.0 | 65x50 | 11 | 15 | | 59 | 57 | 55 | 54 | 51 | 42 |
| 3M 50-200/15.0 | 65x50 | 15 | 20 | | 72 | 70 | 69 | 68 | 65 | 57 |

# 3M 65

**3M SERIES · STAINLESS STEEL STANDARD PUMP · 50 Hz · n ≈ 2900 /min**

AQUARIS
MADE IN ITALY



| 4–22 kW | DN 80 × 65 mm | 138 m³/h | 67 m | n ≈ 2900 /min | 3~ 380–415 V |
|---|---|---|---|---|---|
| POWER | SUCTION × DISCHARGE | MAX. FLOW RATE | MAX. HEAD | SPEED | MOTOR |

## DESCRIPTION


- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

## OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

## MATERIALS

| | | |
|---|---|---|
| 1 | Pump casing | SS304 |
| 2 | Impeller | SS304 |
| 3 | Mechanical seal | SiC/Carbon/SS304 |
| 4 | Baffle plate | SS304 |
| 5 | O-ring | Rubber |
| 6 | Connection | Cast iron |
| 7 | Shaft | SS304 |
| 8 | Reinforced seal | Rubber |

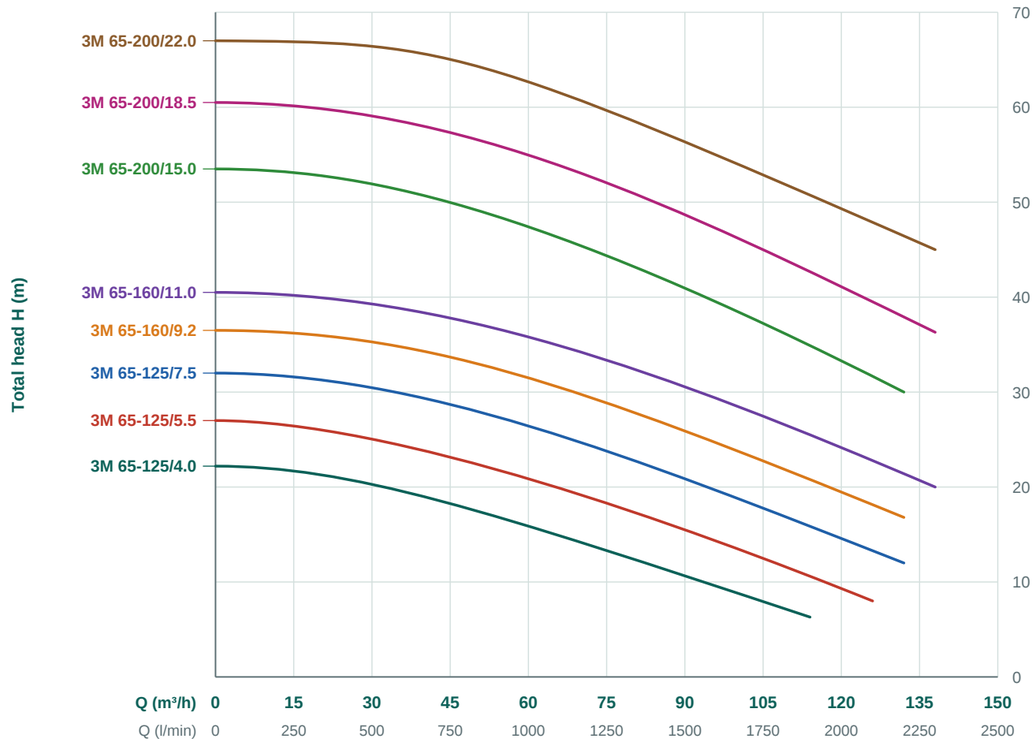


## PRODUCT NOMENCLATURE

Example: 3M 65-200/22.0

| | |
|---|---|
| 3M | Stainless steel standard pump |
| 65 | Discharge size (mm) |
| 200 | Nominal impeller size (mm) |
| 22.0 | Rated power (kW) |

## MOTOR

Three-phase 3~ 380–415 V
50 Hz
n ≈ 2900 /min

## APPLICATIONS

Clean water · Domestic · Civil · Industrial

## PERFORMANCE DATA

| MODEL | DN | $P_2$ | | Q m³/h | 0 | 36 | 42 | 54 | 72 | 114 | 126 | 132 | 138 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | mm | kW | HP | l/min | 0 | 600 | 700 | 900 | 1200 | 1900 | 2100 | 2200 | 2300 |
| 3M 65-125/4.0 | 80x65 | 4 | 5.5 | H (m) | 22.2 | 19.8 | 19 | 17.3 | 13.5 | 6.3 | – | – | – |
| 3M 65-125/5.5 | 80x65 | 5.5 | 7.5 | | 27 | 24.3 | 24 | 22.2 | 18.5 | 10.8 | 8 | – | – |
| 3M 65-125/7.5 | 80x65 | 7.5 | 10 | | 32 | 29.8 | 29.5 | 27.8 | 24 | 16.1 | 13.4 | 12 | – |
| 3M 65-160/9.2 | 80x65 | 9.2 | 12.5 | | 36.5 | 34.7 | 34.5 | 32.8 | 29 | 21.1 | 18.3 | 16.8 | – |
| 3M 65-160/11.0 | 80x65 | 11 | 15 | | 40.5 | 38.8 | 38.5 | 37.1 | 33.5 | 25.8 | 23 | 21.5 | 20 |
| 3M 65-200/15.0 | 80x65 | 15 | 20 | | 53.5 | 51.2 | 51 | 49 | 44.5 | 35.3 | 31.8 | 30 | – |
| 3M 65-200/18.5 | 80x65 | 18.5 | 25 | | 60.5 | 58.6 | 58.5 | 56.5 | 52 | 43 | 39.7 | 38 | 36.3 |
| 3M 65-200/22.0 | 80x65 | 22 | 30 | | 67 | 66 | 65.5 | 64 | 60 | 51 | 48 | 46.5 | 45 |

# 3M 80

**3M SERIES · STAINLESS STEEL STANDARD PUMP · 50 Hz · n ≈ 2900 /min**

AQUARIS
MADE IN ITALY



| 11–37 kW | DN 100 × 80 mm | 240 m³/h | 66 m | n ≈ 2900 /min | 3~ 380–415 V |
|---|---|---|---|---|---|
| POWER | SUCTION × DISCHARGE | MAX. FLOW RATE | MAX. HEAD | SPEED | MOTOR |

## DESCRIPTION


- Stainless steel 304 standard pump design
- All wetted parts are in stainless steel 304
- Available with square or round motor
- Stainless steel AISI 316 available on request
- Back pull-out design: no need to remove the pipes
- Quality bearing, wear-resistant mechanical seal
- Suitable for some impure liquids

## OPERATING LIMITS

- Liquid temperature between -10 °C and +120 °C
- Ambient temperature between 0 °C and +50 °C
- Max. working pressure 16 bar / Continuous duty S1

## MATERIALS

| | | |
|---|---|---|
| 1 | Pump casing | SS304 |
| 2 | Impeller | SS304 |
| 3 | Mechanical seal | SiC/Carbon/SS304 |
| 4 | Baffle plate | SS304 |
| 5 | O-ring | Rubber |
| 6 | Connection | Cast iron |
| 7 | Shaft | SS304 |
| 8 | Reinforced seal | Rubber |

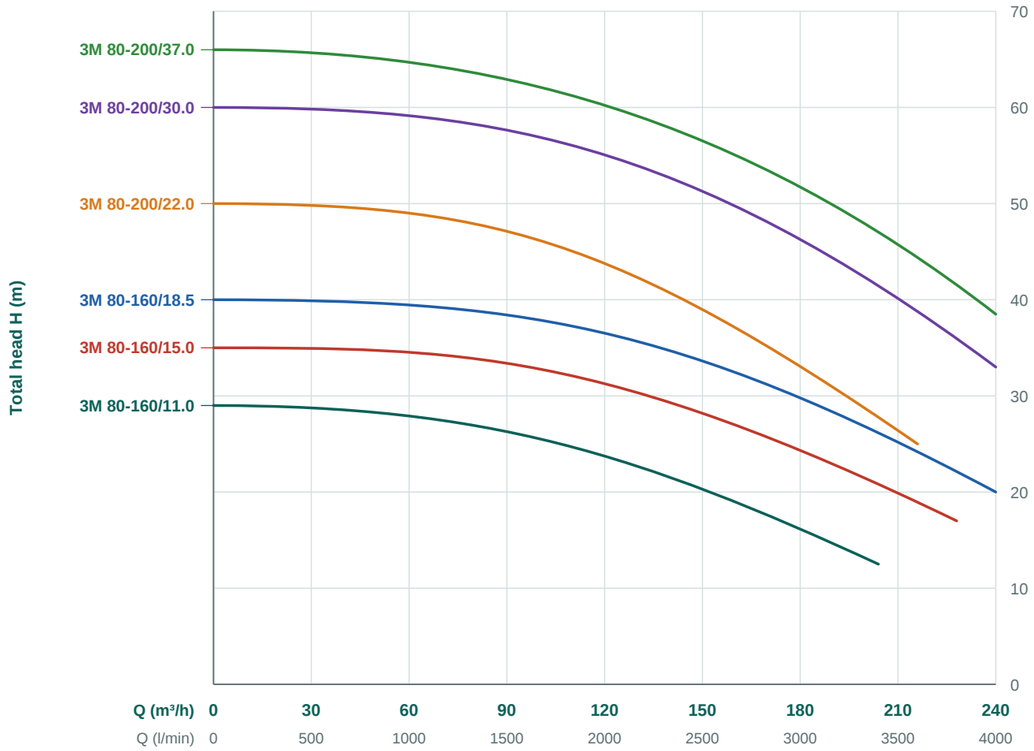


## PRODUCT NOMENCLATURE

Example: 3M 80-200/37.0

| | |
|---|---|
| 3M | Stainless steel standard pump |
| 80 | Discharge size (mm) |
| 200 | Nominal impeller size (mm) |
| 37.0 | Rated power (kW) |

## MOTOR

Three-phase 3~ 380–415 V
50 Hz
n ≈ 2900 /min

## APPLICATIONS

Clean water · Domestic · Civil · Industrial


## PERFORMANCE DATA

| MODEL | DN | $P_2$ | | Q m³/h | 0 | 72 | 114 | 126 | 132 | 138 | 150 | 204 | 216 | 228 | 240 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | mm | kW | HP | l/min | 0 | 1200 | 1900 | 2100 | 2200 | 2300 | 2500 | 3400 | 3600 | 3800 | 4000 |
| 3M 80-160/11.0 | 100x80 | 11 | 15 | H (m) | 29 | 27.5 | 24.2 | 23 | 22.4 | 21.8 | 20.4 | 12.5 | – | – | – |
| 3M 80-160/15.0 | 100x80 | 15 | 20 | | 35 | 34.5 | 31.5 | 30.5 | 30 | 29.4 | 28.1 | 21 | 19.1 | 17 | – |
| 3M 80-160/18.5 | 100x80 | 18.5 | 25 | | 40 | 39.5 | 36.7 | 35.7 | 35.2 | 34.7 | 33.5 | 26.4 | 24.4 | 22.3 | 20 |
| 3M 80-200/22.0 | 100x80 | 22 | 30 | | 50 | 48.5 | 44.5 | 43 | 42 | 41 | 39 | 27.8 | 25 | – | – |
| 3M 80-200/30.0 | 100x80 | 30 | 40 | | 60 | 59 | 56 | 54.5 | 54 | 53 | 51 | 41.5 | 39 | 36.1 | 33 |
| 3M 80-200/37.0 | 100x80 | 37 | 50 | | 66 | 64 | 61 | 59.5 | 59 | 58 | 56.5 | 47 | 44.5 | 41.5 | 38.5 |

# 3M SERIES


3M SERIES · DIMENSIONS · STAINLESS STEEL STANDARD PUMP · 50 Hz · n ≈ 2900 /min

AQUARIS
MADE IN ITALY

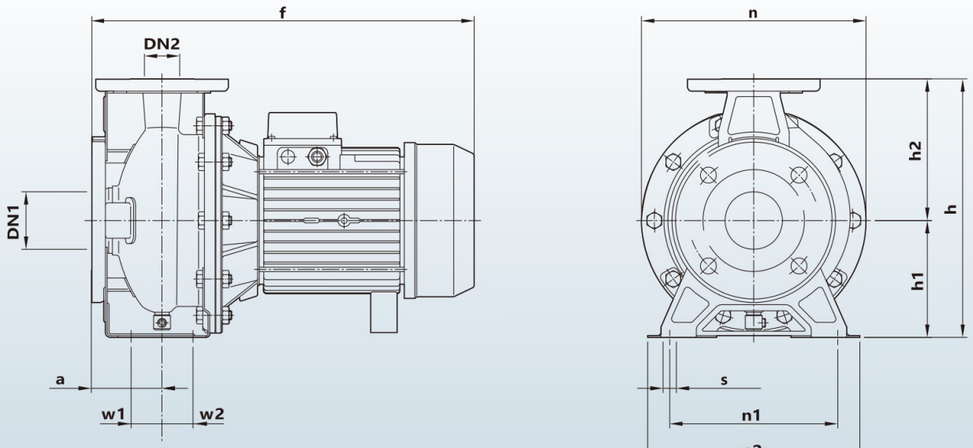


## BACK PULL-OUT DESIGN

The motor, coupling, cantilever support and impeller can be removed without disturbing the pump casing or removing the pipes.

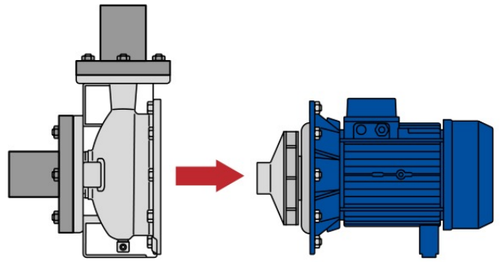

## UNITS

- Dimensions in mm
- Three-phase 3~ 380–415 V

## DIMENSIONS

| MODEL | DN1 | DN2 | a | f | h | h1 | h2 | n | n1 | n2 | w1 | w2 | s |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **3M 32-160/1.1** | 50 | 32 | 100 | 493 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 32-160/1.5** | 50 | 32 | 100 | 493 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 32-160/2.2** | 50 | 32 | 100 | 493 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 32-200/3.0** | 50 | 32 | 100 | 538 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 32-200/4.0** | 50 | 32 | 100 | 538 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 32-200/5.5** | 50 | 32 | 100 | 538 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 40-125/1.5** | 65 | 40 | 100 | 493 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 40-125/2.2** | 65 | 40 | 100 | 493 | 306 | 150 | 156 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 40-160/3.0** | 65 | 40 | 105 | 542 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 40-160/4.0** | 65 | 40 | 105 | 542 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 40-200/5.5** | 65 | 40 | 105 | 584 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 40-200/7.5** | 65 | 40 | 105 | 584 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 40-200/11.0** | 65 | 40 | 105 | 650 | 340 | 160 | 180 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-125/2.2** | 65 | 50 | 100 | 428 | 340 | 160 | 180 | 235 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-125/3.0** | 65 | 50 | 100 | 493 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-125/4.0** | 65 | 50 | 100 | 493 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-160/5.5** | 65 | 50 | 105 | 584 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-160/7.5** | 65 | 50 | 105 | 584 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-200/9.2** | 65 | 50 | 105 | 650 | 365 | 185 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-200/11.0** | 65 | 50 | 105 | 650 | 365 | 185 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 50-200/15.0** | 65 | 50 | 105 | 768 | 365 | 185 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-125/4.0** | 80 | 65 | 100 | 584 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-125/5.5** | 80 | 65 | 100 | 584 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-125/7.5** | 80 | 65 | 100 | 584 | 340 | 160 | 180 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-160/9.2** | 80 | 65 | 113 | 675 | 345 | 160 | 185 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-160/11.0** | 80 | 65 | 113 | 675 | 345 | 160 | 185 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-200/15.0** | 80 | 65 | 113 | 793 | 370 | 185 | 185 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-200/18.5** | 80 | 65 | 113 | 793 | 370 | 185 | 185 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 65-200/22.0** | 80 | 65 | 113 | 793 | 370 | 185 | 185 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 80-160/11.0** | 100 | 80 | 125 | 700 | 400 | 180 | 220 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 80-160/15.0** | 100 | 80 | 125 | 870 | 400 | 180 | 220 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 80-160/18.5** | 100 | 80 | 125 | 870 | 400 | 180 | 220 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 80-200/22.0** | 100 | 80 | 125 | 915 | 450 | 200 | 250 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 80-200/30.0** | 100 | 80 | 125 | 985 | 450 | 200 | 250 | 278 | 148 | 175 | 60 | 31 | 15 |
| **3M 80-200/37.0** | 100 | 80 | 125 | 985 | 450 | 200 | 250 | 278 | 148 | 175 | 60 | 31 | 15 |