
4MIX SERIES

AQUARIS MADE IN ITALY

SUBMERSIBLE MIXER · ALL STAINLESS STEEL · 50 Hz

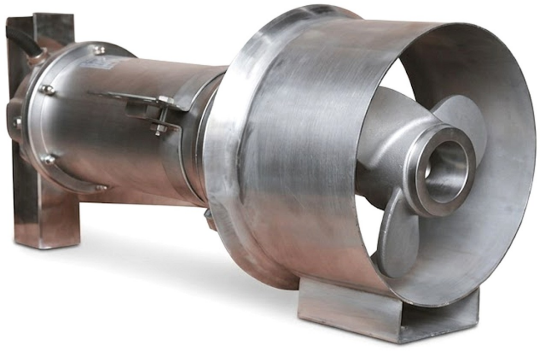

0.4–2.2 kW
OUTPUT

108–408 m³/h
CAPACITY

1.78–3.5 m/s
FLOW SPEED

SUS304
BODY MATERIAL

APPLICATION

- Wastewater treatment in all industries
- River, pond and lake dredging
- Artificial water flow for amusement facilities
- Mixing and agitating impurities in water


MOTOR

- Power supply: 3~ 380–415 V, 50 Hz
- Insulation class: F
- Protection: IP68
- Duty: S1 (continuous)
- Built-in motor overload protector
- Motor type: Submersible dry type

OPERATING CONDITIONS

- Liquid temperature: 0–40 °C
- Liquid density: max. 1050 kg/m³
- pH value: 5–9
- Max. submergence depth: 20 m
- Installation: submersible, horizontal

CONSTRUCTION

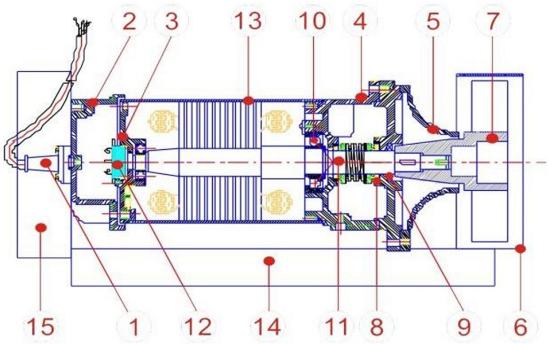

SPECIFICATIONS

MODEL		4MIX-0.4	4MIX-0.75	4MIX-1.1	4MIX-1.5	4MIX-2.2
Output	kW	0.4	0.75	1.1	1.5	2.2
Output	HP	0.55	1	1.5	2	3
Poles		4	4	4	4	4
Capacity	m³/h	108	192	240	270	408
Flow speed	m/s	1.78	2.02	2.8	2.5	3.5

MATERIALS

NO.	NAME	MATERIAL
1	Cable	UL STOW
2	Motor upper cover	SUS304
3	Bearing housing	SUS304
4	Bracket	SUS304
5	Inlet housing	SUS304
6	Jet ring	SUS304
7	Mixer impeller	SUS304
8	Mechanical seal	SIC/SIC
9	Oil seal	VITON
10	Bearing	High quality
11	Shaft	SUS304
12	Overload protector	High quality
13	Motor housing	SUS304
14	Support base	SUS304
15	Seat for guide rail device	SUS304