FEATURES

- Double-channel impeller with high flow capacity; passes suspended solids of 6–52 mm in diameter.
- Copper winding.
- All parts in contact with water are stainless steel; no rust.
- 10 m cable.

APPLICATION

- Suitable for clean water and sewage.
- Water supply, circulation and water changing for farming, forestry and fisheries.
- Equipment for gardening, aquariums, landscape waterfalls, water drainage and filtration.

WORKING CONDITIONS

Liquid temperature: 0 to +50 °C
Immersion depth: ≤ 5 m



PRODUCT NOMENCLATURE

FC	Stainless steel submersible sewage pump series
35	Rated flow (m³/h)
7	Rated head (m)
2.2	Power (kW)


Example: FC-35-7-2.2

RANGE CHARACTERISTICS

Power	**2.2–7.5 kW**
Flow up to	**120 m³/h**
Head up to	**24 m**
Solids passage	**6–52 mm**

MATERIALS

COMPONENT	MATERIAL
Pump casing	Stainless Steel AISI 304
Motor casing	Stainless Steel AISI 304
Impeller	Stainless Steel AISI 304
Shaft	Stainless Steel AISI 304
Mechanical seal	SiC / SiC + Carbon / SiC
O-ring	NBR

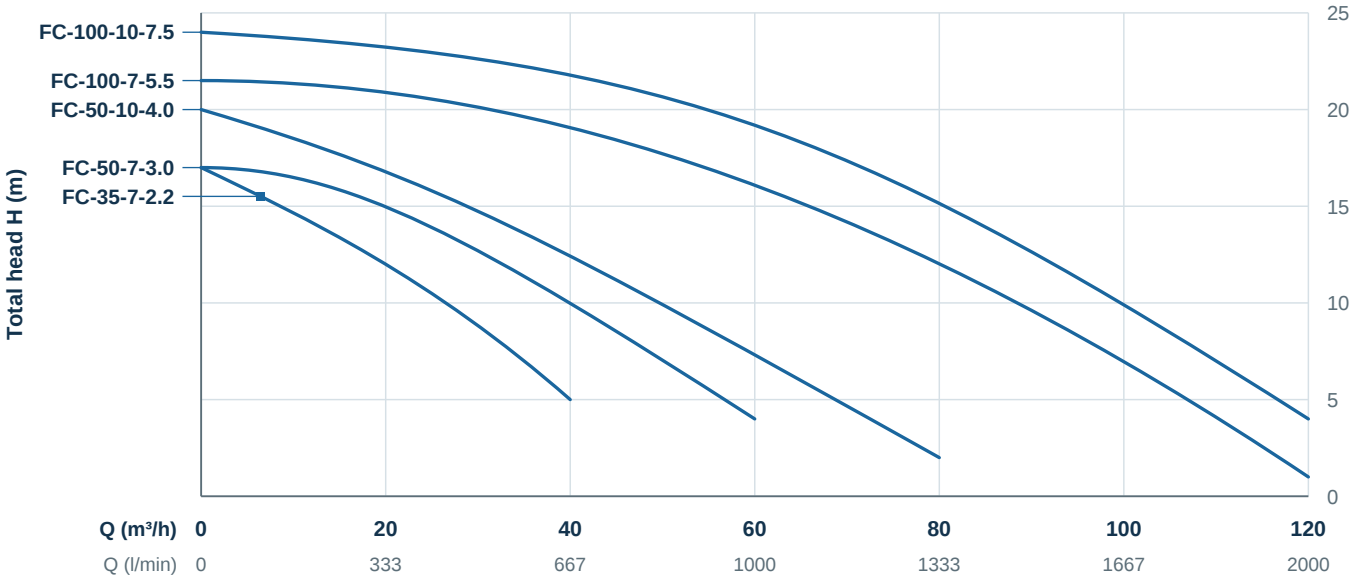

PERFORMANCE DATA

MODEL 3~ 380–415 V	P_2 kW	HP	Q	m³/h / l/min	0 / 0	20 / 333	40 / 667	60 / 1000	80 / 1333	100 / 1667	120 / 2000
FC-35-7-2.2	2.2	3			17	12	5	–	–	–	–
FC-50-7-3.0	3	4			17	15	10	4	–	–	–
FC-50-10-4.0	4	5.5	**H (m)**		20	17	13	7	2	–	–
FC-100-7-5.5	5.5	7.5			21.5	21	19	16	12	7	1
FC-100-10-7.5	7.5	10			24	23	22	19	15	10	4

FEATURES

- Double-channel impeller with high flow capacity; passes suspended solids of 6–52 mm in diameter.
- Copper winding.
- All parts in contact with water are stainless steel; no rust.
- 10 m cable.

APPLICATION

- Suitable for clean water and sewage.
- Water supply, circulation and water changing for farming, forestry and fisheries.
- Equipment for gardening, aquariums, landscape waterfalls, water drainage and filtration.

WORKING CONDITIONS

Liquid temperature: 0 to +50 °C
Immersion depth: ≤ 5 m



PRODUCT NOMENCLATURE

FC	Stainless steel submersible sewage pump series
150	Rated flow (m³/h)
15	Rated head (m)
11	Power (kW)


Example: FC-150-15-11

RANGE CHARACTERISTICS

Power	**11–15 kW**
Flow up to	**250 m³/h**
Head up to	**30 m**
Solids passage	**6–52 mm**

MATERIALS

COMPONENT	MATERIAL
Pump casing	Stainless Steel AISI 304
Motor casing	Stainless Steel AISI 304
Impeller	Stainless Steel AISI 304
Shaft	Stainless Steel AISI 304
Mechanical seal	SiC / SiC + Carbon / SiC
O-ring	NBR

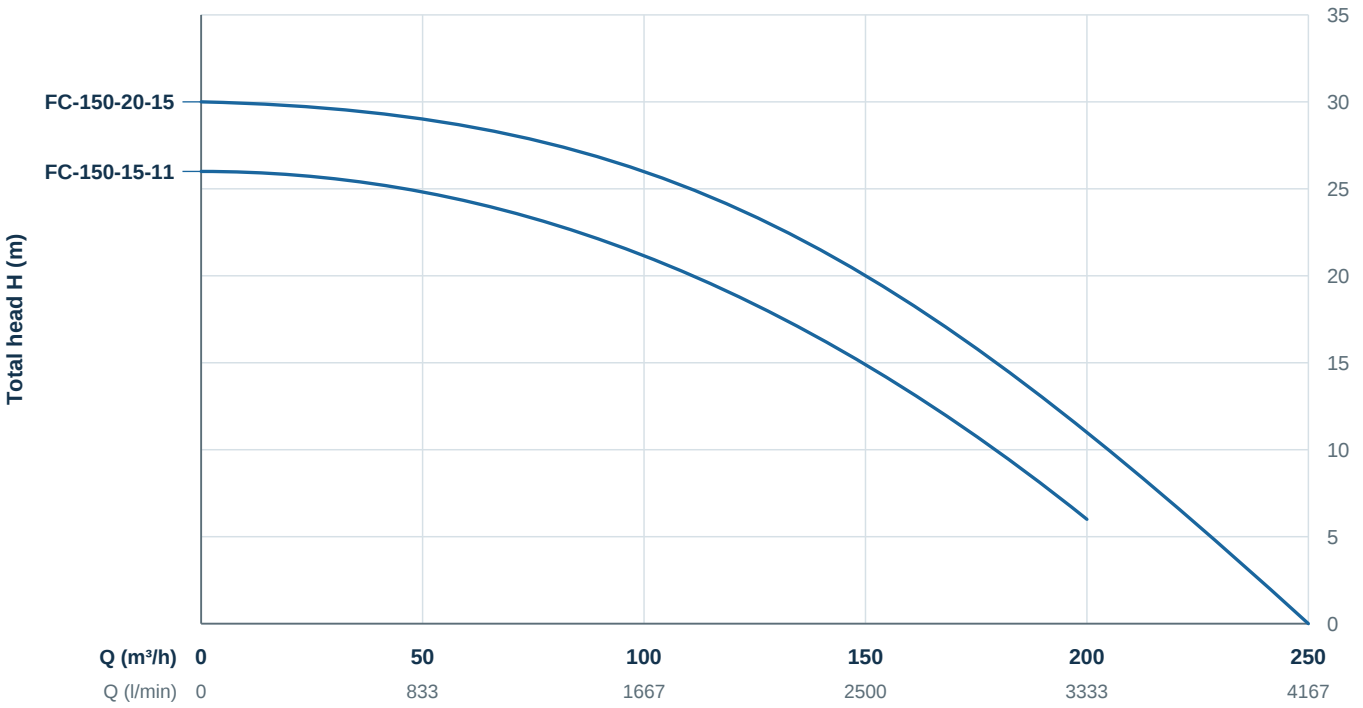

PERFORMANCE DATA

MODEL 3~ 380–415 V	P_2 kW	HP	Q	m³/h / l/min	0 / 0	50 / 833	100 / 1667	150 / 2500	200 / 3333	250 / 4167
FC-150-15-11	11	15	**H (m)**		26	25	21	15	6	–
FC-150-20-15	15	20			30	29	26	20	11	0

SPARE PARTS

NO.	NAME
1	Cable
2	Press nut
3	Pressure washer
4	Cable head
5	Cross recessed pan head screw and washer assembly
6	O-ring
7	Acorn nut
8	Spring washer
9	Washer
10	Handle
11	Upper cover
12	Plastic spacer
13	Cross recessed pan head screw and washer assembly
14	Terminal
15	Hexagon socket head cap screw
16	Spring washer
17	Washer
18	Hexagon socket head cap screw
19	Motor base
20	Rear flange cover
21	Three-wave washer
22	Bearing
23	Stator assembly
24	Rotor assembly
25	Bearing
26	Front cover
27	Mechanical seal
28	Mechanical flat pad
29	External circlip
30	O-ring
31	Pump cover
32	Mechanical seal
33	O-ring
34	Impeller
35	Key
36	Washer
37	Spring washer
38	Hexagon bolt
39	Pump casing
40	Acorn nut


MATERIALS

COMPONENT	MATERIAL
Pump casing	Stainless Steel AISI 304
Motor casing	Stainless Steel AISI 304
Impeller	Stainless Steel AISI 304
Shaft	Stainless Steel AISI 304
Mechanical seal	SiC / SiC + Carbon / SiC
O-ring	NBR

WORKING CONDITIONS

Liquid temperature: 0 to +50 °C
Immersion depth: ≤ 5 m

CONSTRUCTION

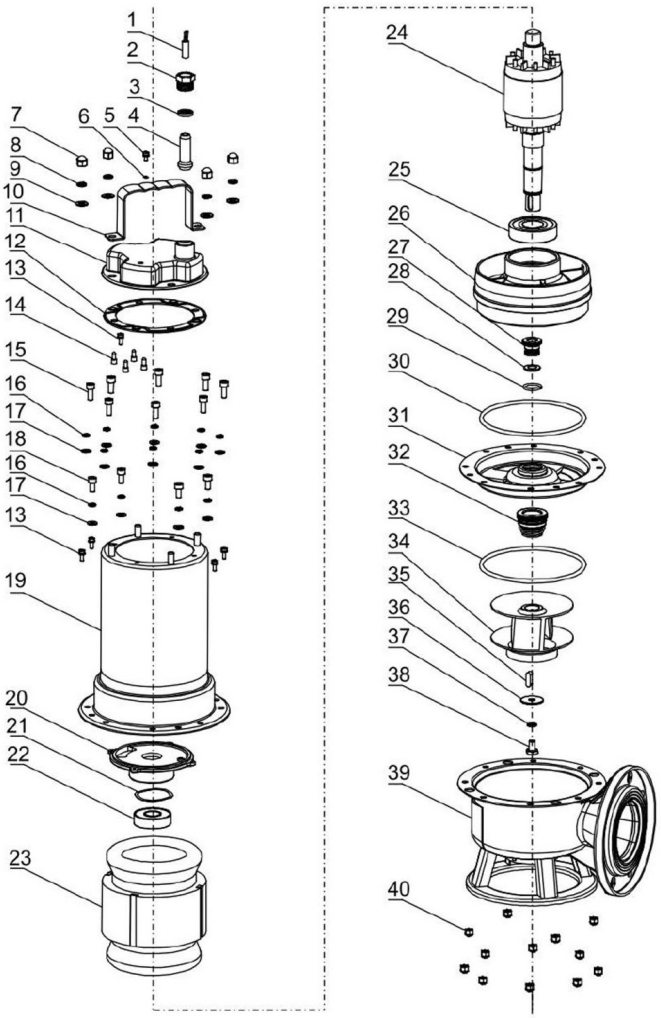

INSTALLATION

