perotac MADE IN TAIWAN

# CDLF

## CDLF SERIES / VERTICAL MULTI-STAGE CENTRIFUGAL PUMPS

Light stainless steel vertical multi-stage centrifugal pump | 50 Hz | n ≈ 2900 /min



CDLF4 CDLF8 CDLF32

## PUMP

CDLF is a vertical, non-self-priming multistage centrifugal pump driven by a standard electric motor. The motor shaft is connected directly to the pump shaft through a coupling. The pressure-resistant cylinder and the flow passage components are held between the pump head and the inlet and outlet section by stay bolts. The inlet and outlet are at the bottom of the pump, on the same level. The pump can be fitted with an intelligent protector against dry running, phase failure and overload.

## MOTOR

Totally enclosed, fan-cooled two-pole standard motor
Protection class: IP55 | Insulation class: F
Single-phase 1~ 220–240 V, 50 Hz
Three-phase 3~ 380–415 V, 50 Hz
Above 3 kW: three-phase only

## APPLICATIONS

CDLF is a versatile pump. It can convey a wide range of media, from tap water to industrial liquids, at different temperatures, flow rates and pressures. CDLF is suitable for slightly corrosive liquids.

**Water supply:** Filtration and water transfer in waterworks, pressure boosting in main pipelines and high-rise buildings.

**Industrial boosting:** Process water systems, cleaning systems, high-pressure washing systems, fire-fighting systems.

**Industrial liquid conveying:** Cooling and air-conditioning systems, boiler feed and condensate systems, machine-related applications, acids and alkalis.

**Water treatment:** Ultrafiltration systems, reverse osmosis systems, distillation systems, separators, swimming pools.

**Irrigation:** Farmland irrigation, sprinkler irrigation, drip irrigation.

## OPERATING CONDITIONS

Thin, clean, non-flammable and non-explosive liquids without solid particles or fibers
Liquid temperature, normal type: -15 °C ~ +70 °C
Liquid temperature, hot water type: -15 °C ~ +120 °C
Ambient temperature: up to +40 °C
Altitude: up to 1000 m

## MODEL DESIGNATION

**CDLF 2, 4, 8, 12, 16, 20**

Example: CDLFM4-2 · CDLF4-2T

| | |
|---|---|
| **CDLF** | Light vertical multistage centrifugal pump; flow passage components in stainless steel 304 or 316L |
| **M** | Single-phase 1~ 220–240 V (models up to 3 kW) |
| **4** | Rated flow ($m^3/h$) |
| **2** | Number of stages |
| **T** | Three-phase 3~ 380–415 V |

**CDLF 32, 42**

Example: CDLFM32-2-2 · CDLF32-2-2T

| | |
|---|---|
| **CDLF** | Light vertical multistage centrifugal pump; flow passage components in stainless steel 304 or 316L |
| **M** | Single-phase 1~ 220–240 V (models up to 3 kW) |
| **32** | Rated flow ($m^3/h$) |
| **2** | Number of stages |
| **2** | Number of small impellers |
| **T** | Three-phase 3~ 380–415 V |


## PERFORMANCE CURVES

1. All curves are based on values measured at 50 Hz and a constant motor speed of 2900 or 2950 /min.
2. Curve tolerances according to ISO 9906, Annex A.
3. Measurements were made with air-free water at 20 °C and a kinematic viscosity of 1 $mm^2/s$.


## PRODUCT RANGE

| DESCRIPTION | CDLF2 | CDLF4 | CDLF8 | CDLF12 | CDLF16 | CDLF20 | CDLF32 | CDLF42 |
|---|---|---|---|---|---|---|---|---|
| **Rated flow ($m^3/h$)** | 2 | 4 | 8 | 12 | 16 | 20 | 32 | 42 |
| **Rated flow (l/s)** | 0.56 | 1.1 | 2.2 | 3.3 | 4.4 | 5.6 | 8.9 | 11.7 |
| **Flow range ($m^3/h$)** | 1–3.5 | 1.5–7 | 5–12 | 7–16 | 8–22 | 10–28 | 16–40 | 25–55 |
| **Flow range (l/s)** | 0.28–0.97 | 0.42–1.9 | 1.4–3.3 | 1.9–4.4 | 2.2–6.1 | 2.8–7.8 | 4.4–11.1 | 6.9–15.3 |
| **Max. pressure (bar)** | 23 | 21 | 21 | 22 | 22 | 23 | 29 | 30 |
| **Motor power (kW)** | 0.37–3 | 0.37–4 | 0.75–7.5 | 1.5–11 | 2.2–15 | 1.1–18.5 | 1.5–30 | 3–45 |
| **Temperature range (°C)** | | | | -15 ~ +120 | | | | |
| **Max. efficiency (%)** | 46 | 57 | 62 | 63 | 66 | 69 | 73 | 75 |
| **DIN flange** | DN25 | DN32 | DN40 | DN50 | DN50 | DN50 | DN65 | DN80 |
| **Cutting ferrule joint** | DN32 | DN32 | DN50 | DN50 | DN50 | DN50 | – | – |
| **Pipe thread** | ZG1¼ | ZG1¼ | ZG2 | ZG2 | ZG2 | ZG2 | – | – |


## SECTION DRAWING CDLF 2, 4

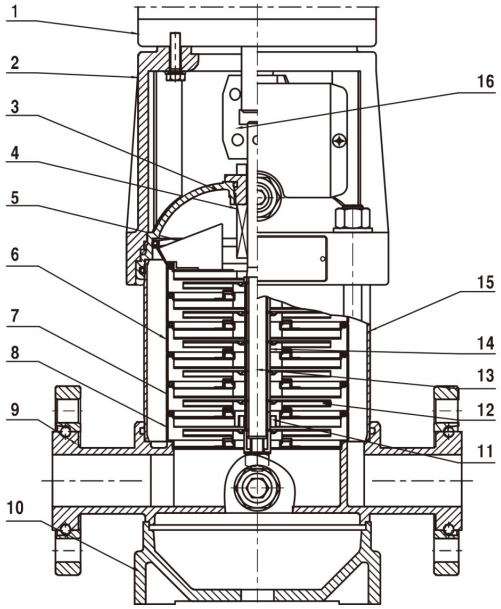


## SECTION DRAWING CDLF 8, 12, 16, 20

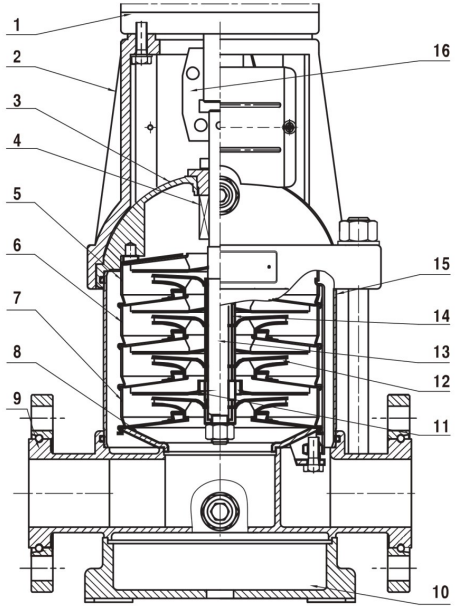


## SECTION DRAWING CDLF 32, 42

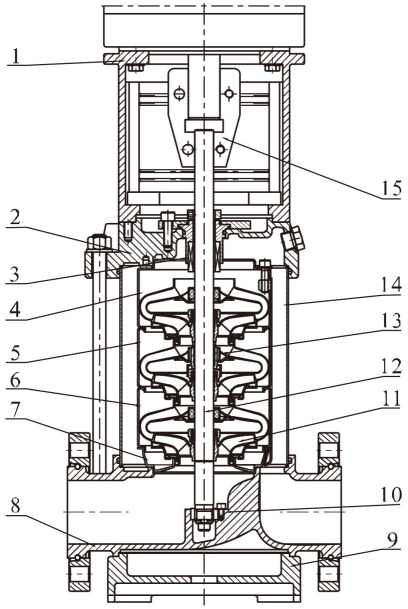


## MATERIALS CDLF 2, 4

| NO. | NAME | MATERIAL | AISI / ASTM |
|---|---|---|---|
| 1 | Motor | | |
| 2 | Pump head | Cast iron | ASTM25B |
| 3 | Seal base | Stainless steel | AISI304 |
| 4 | Mechanical seal | | |
| 5 | Top diffuser | Stainless steel | AISI304 |
| 6 | Diffuser | Stainless steel | AISI304 |
| 7 | Support diffuser | Stainless steel | AISI304 |
| 8 | Inducer | Stainless steel | AISI304 |
| 9 | Inlet and outlet chamber | Stainless steel | AISI304 |
| 10 | Base plate | Stainless steel | AISI304 |
| 11 | Bearing | Tungsten carbide | |
| 12 | Impeller | Stainless steel | AISI304 |
| 13 | Shaft | Stainless steel | AISI304 / AISI316L |
| 14 | Impeller sleeve | Stainless steel | AISI304 |
| 15 | Cylinder | Stainless steel | AISI304 |
| 16 | Coupling | Carbon steel | |

Items 3, 9, 10: CDLF version.

## MATERIALS CDLF 8, 12, 16, 20

| NO. | NAME | MATERIAL | AISI / ASTM |
|---|---|---|---|
| 1 | Motor | | |
| 2 | Pump head | Cast iron | ASTM25B |
| 3 | Seal base | Stainless steel | AISI304 |
| 4 | Mechanical seal | | |
| 5 | Top diffuser | Stainless steel | AISI304 |
| 6 | Diffuser | Stainless steel | AISI304 |
| 7 | Support diffuser | Stainless steel | AISI304 |
| 8 | Inducer | Stainless steel | AISI304 |
| 9 | Inlet and outlet chamber | Stainless steel | AISI304 |
| 10 | Base plate | Cast iron | ASTM25B |
| 11 | Bearing | Tungsten carbide | |
| 12 | Impeller | Stainless steel | AISI304 |
| 13 | Shaft | Stainless steel | AISI304 / AISI316L |
| 14 | Impeller sleeve | Stainless steel | AISI304 |
| 15 | Cylinder | Stainless steel | AISI304 |
| 16 | Coupling | Carbon steel | |

Items 3, 9, 10: CDLF version.

## MATERIALS CDLF 32, 42

| NO. | NAME | MATERIAL | AISI / ASTM |
|---|---|---|---|
| 1 | Bracket | Cast iron | ASTM25B |
| 2 | Pump head | Stainless steel | AISI304 |
| 3 | Mechanical seal | | |
| 4 | Top diffuser | Stainless steel | AISI304 |
| 5 | Support diffuser | Stainless steel | AISI304 |
| 6 | Diffuser | Stainless steel | AISI304 |
| 7 | Inducer | Stainless steel | AISI304 |
| 8 | Inlet and outlet chamber | Stainless steel | AISI304 |
| 9 | Base plate | Cast iron | ASTM25B |
| 10 | Bottom bearing | Tungsten carbide | |
| 11 | Impeller | Stainless steel | AISI304 |
| 12 | Shaft | Stainless steel | AISI316L / AISI304 / AISI431 |
| 13 | Intermediate bearing | Tungsten carbide | |
| 14 | Cylinder | Stainless steel | AISI304 |
| 15 | Coupling | Carbon steel | |
| – | Rubber parts | NBR | |


Items 2, 8: CDLF version.

## RANGE CHARACTERISTICS


| | |
|---|---|
| **Rated flow** | 2 m³/h |
| **Flow range** | 1–3.5 m³/h |
| **Max. pressure** | 23 bar |
| **Motor power** | 0.37–3 kW |
| **Inlet / Outlet** | 1" / 1" |
| **Speed** | n ≈ 2900 /min |



## INSTALLATION SKETCH

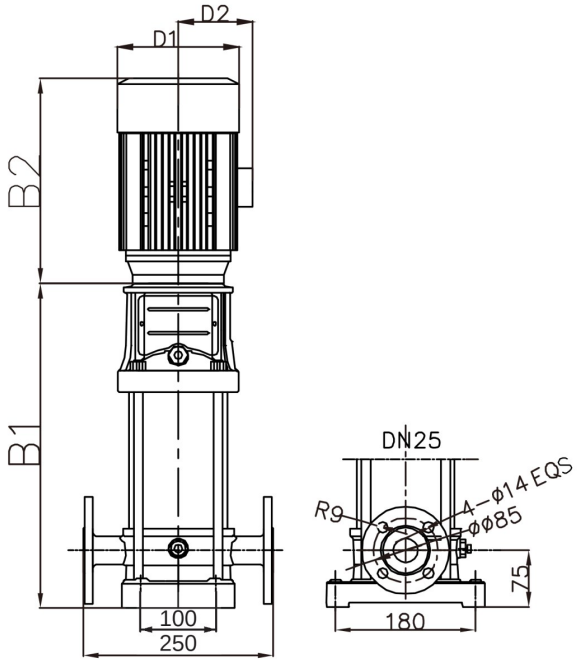


The overall dimensions with a single-phase or explosion-proof motor differ slightly.

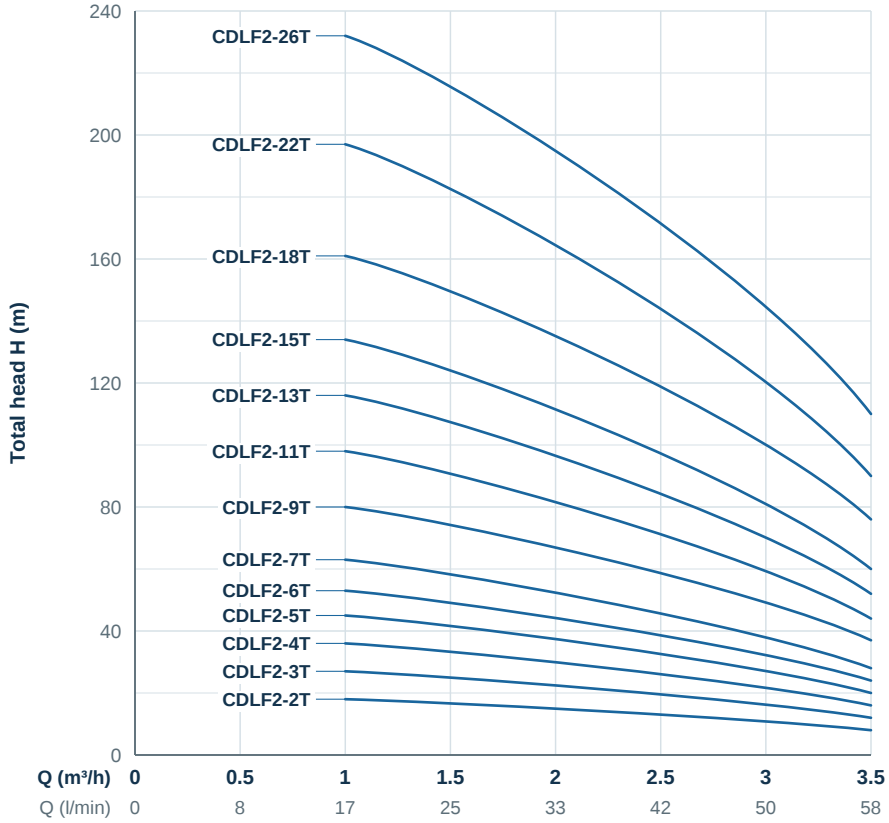


## PERFORMANCE DATA · DIMENSIONS


| MODEL | | $P_2$ | | Q | m³/h | 1 | 1.2 | 1.6 | 2 | 2.4 | 2.8 | 3.2 | 3.5 | SIZE (mm) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 17 | 20 | 27 | 33 | 40 | 47 | 53 | 58 | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF2-2T** | CDLFM2-2 | 0.37 | 0.5 | | | 18 | 17 | 16 | 15 | 13 | 12 | 10 | 8 | 259 | 235 | 494 | 170 | 120 |
| **CDLF2-3T** | CDLFM2-3 | 0.37 | 0.5 | | | 27 | 26 | 24 | 22 | 20 | 18 | 15 | 12 | 277 | 235 | 512 | 170 | 120 |
| **CDLF2-4T** | CDLFM2-4 | 0.55 | 0.75 | | | 36 | 35 | 33 | 30 | 26 | 24 | 20 | 16 | 295 | 235 | 530 | 170 | 120 |
| **CDLF2-5T** | CDLFM2-5 | 0.55 | 0.75 | | | 45 | 43 | 40 | 37 | 33 | 30 | 24 | 20 | 313 | 235 | 548 | 170 | 120 |
| **CDLF2-6T** | CDLFM2-6 | 0.75 | 1 | | | 53 | 52 | 50 | 45 | 40 | 36 | 30 | 24 | 332 | 240 | 572 | 170 | 120 |
| **CDLF2-7T** | CDLFM2-7 | 0.75 | 1 | | | 63 | 61 | 57 | 52 | 47 | 41 | 35 | 28 | 350 | 240 | 590 | 170 | 120 |
| **CDLF2-9T** | CDLFM2-9 | 1.1 | 1.5 | | H (m) | 80 | 78 | 73 | 67 | 61 | 54 | 45 | 37 | 386 | 240 | 626 | 170 | 120 |
| **CDLF2-11T** | CDLFM2-11 | 1.1 | 1.5 | | | 98 | 95 | 89 | 82 | 73 | 64 | 54 | 44 | 422 | 240 | 662 | 170 | 120 |
| **CDLF2-13T** | CDLFM2-13 | 1.5 | 2 | | | 116 | 114 | 106 | 98 | 89 | 78 | 64 | 52 | 429 | 280 | 709 | 180 | 130 |
| **CDLF2-15T** | CDLFM2-15 | 1.5 | 2 | | | 134 | 130 | 123 | 112 | 100 | 90 | 73 | 60 | 515 | 280 | 795 | 180 | 130 |
| **CDLF2-18T** | CDLFM2-18 | 2.2 | 3 | | | 161 | 157 | 148 | 136 | 121 | 108 | 91 | 76 | 570 | 280 | 850 | 180 | 130 |
| **CDLF2-22T** | CDLFM2-22 | 2.2 | 3 | | | 197 | 192 | 180 | 165 | 148 | 130 | 110 | 90 | 630 | 280 | 910 | 180 | 130 |
| **CDLF2-26T** | CDLFM2-26 | 3 | 4 | | | 232 | 228 | 214 | 198 | 179 | 158 | 130 | 110 | 690 | 280 | 970 | 180 | 130 |

## RANGE CHARACTERISTICS


| | |
|---|---|
| **Rated flow** | 4 m³/h |
| **Flow range** | 1.5–7 m³/h |
| **Max. pressure** | 21 bar |
| **Motor power** | 0.37–4 kW |
| **Inlet / Outlet** | 1.25" / 1.25" |
| **Speed** | n ≈ 2900 /min |



## INSTALLATION SKETCH

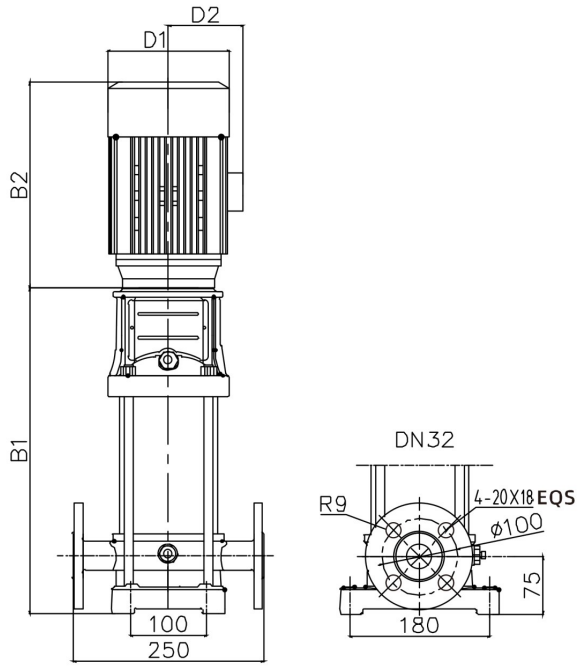


The overall dimensions with a single-phase or explosion-proof motor differ slightly.

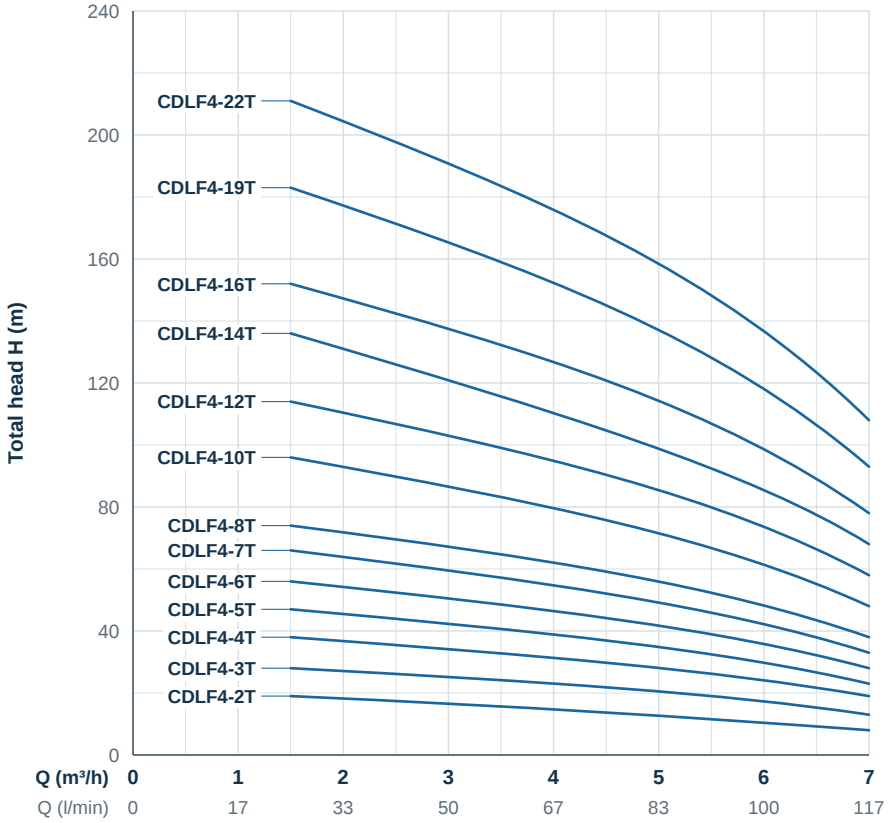


## PERFORMANCE DATA · DIMENSIONS

| MODEL | | $P_2$ | | Q | m³/h | 1.5 | 2 | 3 | 4 | 5 | 6 | 7 | SIZE (mm) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 25 | 33 | 50 | 67 | 83 | 100 | 117 | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF4-2T** | CDLFM4-2 | 0.37 | 0.5 | | | 19 | 18 | 17 | 15 | 13 | 10 | 8 | 255 | 235 | 490 | 170 | 110 |
| **CDLF4-3T** | CDLFM4-3 | 0.55 | 0.75 | | | 28 | 27 | 26 | 24 | 20 | 18 | 13 | 282 | 235 | 517 | 170 | 110 |
| **CDLF4-4T** | CDLFM4-4 | 0.75 | 1 | | | 38 | 36 | 34 | 32 | 27 | 24 | 19 | 309 | 260 | 569 | 170 | 110 |
| **CDLF4-5T** | CDLFM4-5 | 1.1 | 1.5 | | | 47 | 45 | 43 | 40 | 34 | 31 | 23 | 336 | 260 | 596 | 170 | 110 |
| **CDLF4-6T** | CDLFM4-6 | 1.1 | 1.5 | | | 56 | 54 | 52 | 48 | 41 | 37 | 28 | 390 | 260 | 650 | 170 | 110 |
| **CDLF4-7T** | CDLFM4-7 | 1.5 | 2 | | | 66 | 63 | 61 | 56 | 48 | 43 | 33 | 420 | 300 | 720 | 180 | 110 |
| **CDLF4-8T** | CDLFM4-8 | 1.5 | 2 | **H (m)** | | 74 | 72 | 70 | 64 | 55 | 50 | 38 | 447 | 300 | 747 | 180 | 110 |
| **CDLF4-10T** | CDLFM4-10 | 2.2 | 3 | | | 96 | 90 | 87 | 81 | 71 | 62 | 48 | 510 | 300 | 810 | 180 | 110 |
| **CDLF4-12T** | CDLFM4-12 | 2.2 | 3 | | | 114 | 108 | 104 | 95 | 85 | 75 | 58 | 565 | 300 | 865 | 180 | 110 |
| **CDLF4-14T** | CDLFM4-14 | 3 | 4 | | | 136 | 126 | 122 | 112 | 101 | 89 | 68 | 642 | 310 | 952 | 180 | 135 |
| **CDLF4-16T** | CDLFM4-16 | 3 | 4 | | | 152 | 144 | 140 | 129 | 115 | 101 | 78 | 696 | 310 | 1006 | 180 | 135 |
| **CDLF4-19T** | – | 4 | 5.5 | | | 183 | 171 | 168 | 153 | 137 | 122 | 93 | 777 | 350 | 1127 | 180 | 135 |
| **CDLF4-22T** | – | 4 | 5.5 | | | 211 | 200 | 192 | 178 | 160 | 138 | 108 | 858 | 350 | 1208 | 180 | 135 |

# CDLF8




## RANGE CHARACTERISTICS


| | |
|---|---|
| **Rated flow** | 8 m³/h |
| **Flow range** | 5–12 m³/h |
| **Max. pressure** | 21 bar |
| **Motor power** | 0.75–7.5 kW |
| **Inlet / Outlet** | 1.5" / 1.5" |
| **Speed** | n ≈ 2900 /min |



## INSTALLATION SKETCH

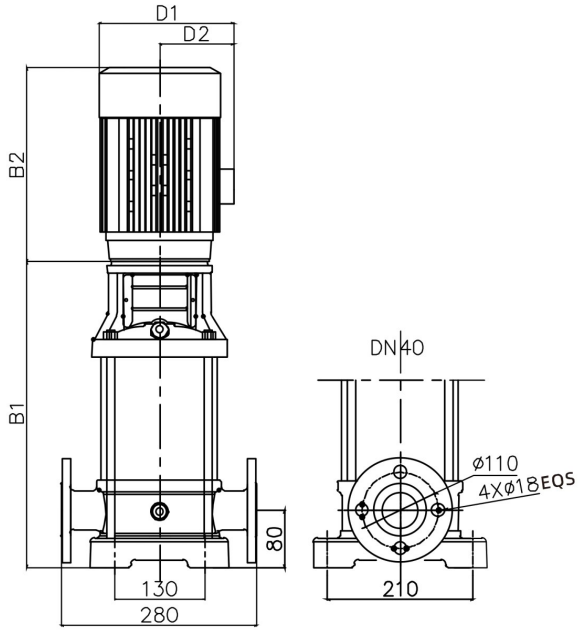


The overall dimensions with a single-phase or explosion-proof motor differ slightly.

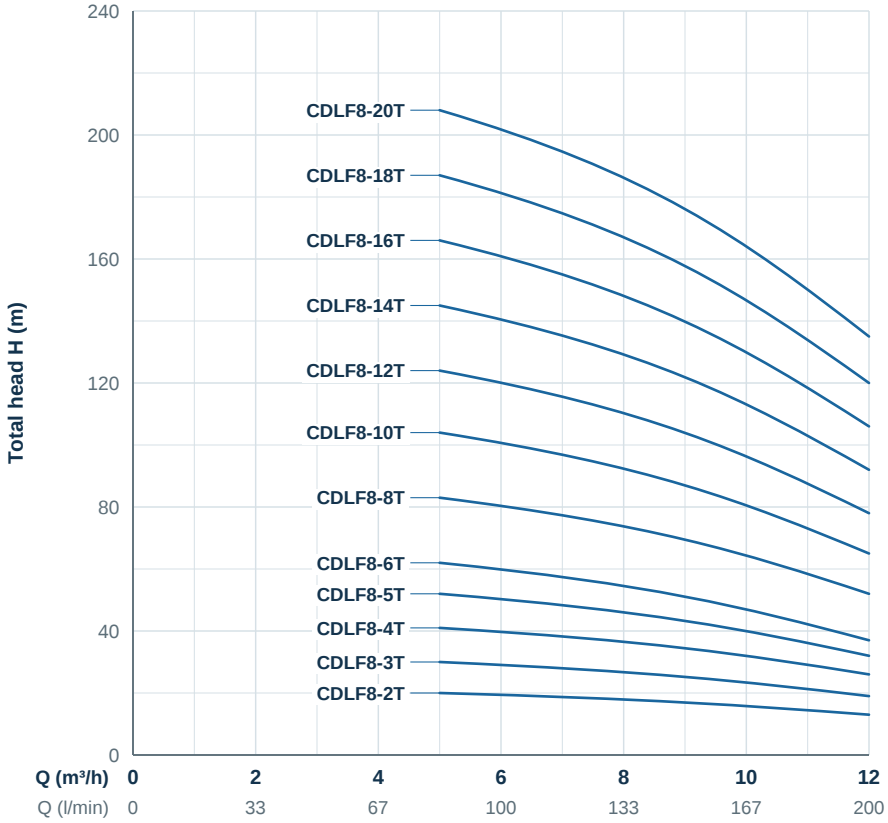


## PERFORMANCE DATA · DIMENSIONS


| MODEL | | $P_2$ | | Q | m³/h | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | SIZE (mm) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 83 | 100 | 117 | 133 | 150 | 167 | 183 | 200 | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF8-2T** | CDLFM8-2 | 0.75 | 1 | | | 20 | 19.5 | 19 | 18 | 17 | 16 | 14 | 13 | 320 | 240 | 560 | 170 | 105 |
| **CDLF8-3T** | CDLFM8-3 | 1.1 | 1.5 | | | 30 | 29.5 | 28.5 | 27 | 25 | 24 | 21 | 19 | 350 | 240 | 590 | 170 | 105 |
| **CDLF8-4T** | CDLFM8-4 | 1.5 | 2 | | | 41 | 39.5 | 38 | 36 | 34 | 32 | 28 | 26 | 385 | 240 | 625 | 175 | 110 |
| **CDLF8-5T** | CDLFM8-5 | 2.2 | 3 | | | 52 | 50 | 48 | 45 | 42 | 40 | 36 | 32 | 415 | 240 | 655 | 175 | 110 |
| **CDLF8-6T** | CDLFM8-6 | 2.2 | 3 | | | 62 | 60 | 57 | 54 | 51 | 48 | 43 | 37 | 445 | 240 | 685 | 175 | 110 |
| **CDLF8-8T** | CDLFM8-8 | 3 | 4 | **H (m)** | | 83 | 80 | 77 | 73 | 69 | 65 | 58 | 52 | 520 | 315 | 835 | 180 | 175 |
| **CDLF8-10T** | – | 4 | 5.5 | | | 104 | 100 | 97 | 92 | 87 | 81 | 73 | 65 | 580 | 315 | 895 | 180 | 175 |
| **CDLF8-12T** | – | 4 | 5.5 | | | 124 | 120 | 116 | 111 | 104 | 97 | 87 | 78 | 640 | 315 | 955 | 180 | 175 |
| **CDLF8-14T** | – | 5.5 | 7.5 | | | 145 | 141 | 136 | 130 | 122 | 113 | 102 | 92 | 720 | 415 | 1135 | 258 | 180 |
| **CDLF8-16T** | – | 5.5 | 7.5 | | | 166 | 161 | 156 | 148 | 139 | 130 | 118 | 106 | 780 | 415 | 1195 | 258 | 180 |
| **CDLF8-18T** | – | 7.5 | 10 | | | 187 | 182 | 175 | 167 | 157 | 146 | 134 | 120 | 840 | 415 | 1255 | 258 | 180 |
| **CDLF8-20T** | – | 7.5 | 10 | | | 208 | 202 | 195 | 186 | 175 | 163 | 150 | 135 | 900 | 415 | 1315 | 258 | 180 |

## RANGE CHARACTERISTICS


| | |
|---|---|
| **Rated flow** | 12 m³/h |
| **Flow range** | 7–16 m³/h |
| **Max. pressure** | 22 bar |
| **Motor power** | 1.5–11 kW |
| **Inlet / Outlet** | 2" / 2" |
| **Speed** | n ≈ 2900 /min |



## INSTALLATION SKETCH

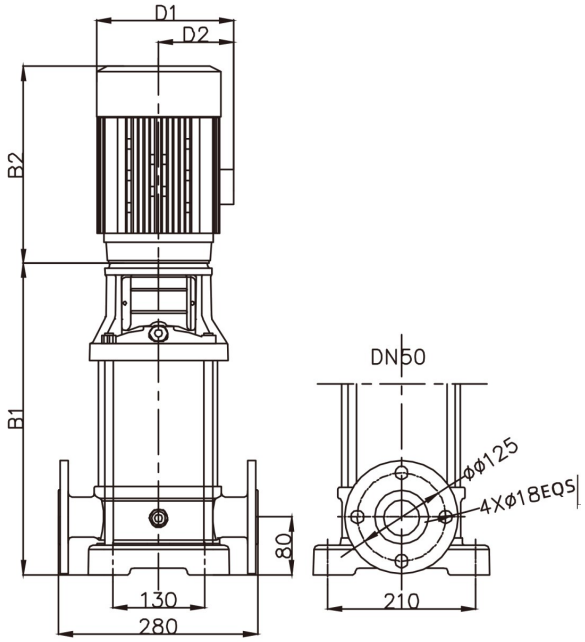


The overall dimensions with a single-phase or explosion-proof motor differ slightly.

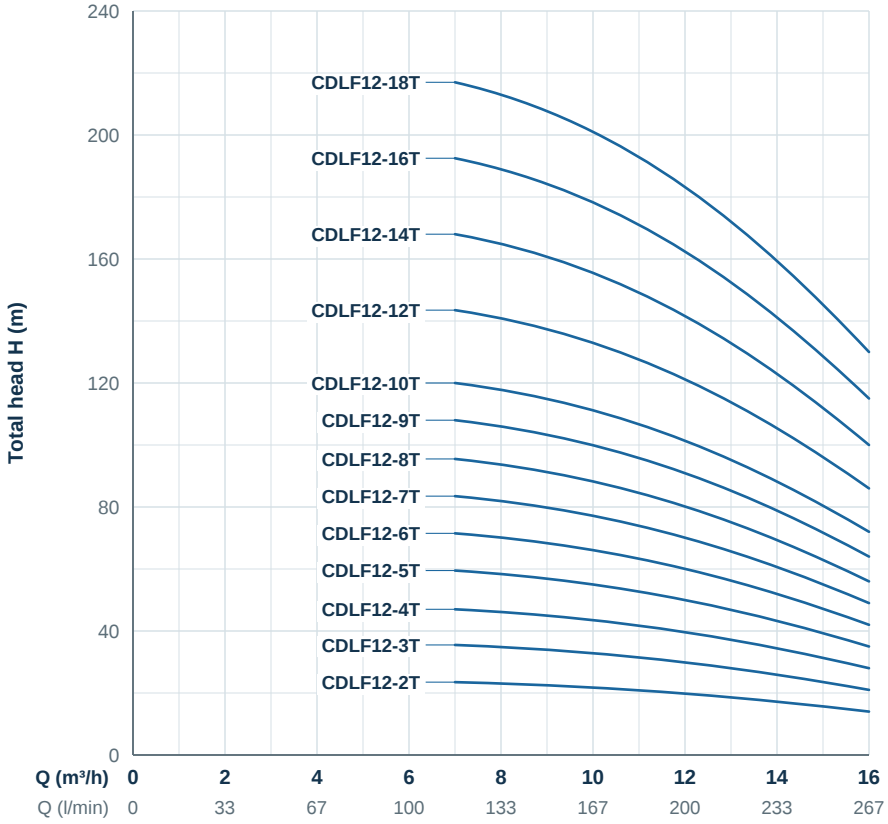


## PERFORMANCE DATA · DIMENSIONS


| MODEL | | $P_2$ | | Q | m³/h | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | SIZE (mm) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 117 | 133 | 150 | 167 | 183 | 200 | 217 | 233 | 250 | 267 | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF12-2T** | CDLFM12-2 | 1.5 | 2 | | | 23.5 | 23 | 22.5 | 22 | 21 | 20 | 18.5 | 17 | 15.5 | 14 | 325 | 280 | 605 | 195 | 110 |
| **CDLF12-3T** | CDLFM12-3 | 2.2 | 3 | | | 35.5 | 35 | 34 | 33 | 31.5 | 30 | 28 | 26 | 23.5 | 21 | 355 | 280 | 635 | 195 | 110 |
| **CDLF12-4T** | CDLFM12-4 | 3 | 4 | | | 47 | 46 | 45 | 44 | 42 | 40 | 37 | 34 | 31 | 28 | 400 | 310 | 710 | 240 | 135 |
| **CDLF12-5T** | CDLFM12-5 | 3 | 4 | | | 59.5 | 58 | 56.5 | 55 | 52.5 | 50 | 46.5 | 43 | 39 | 35 | 400 | 350 | 750 | 240 | 135 |
| **CDLF12-6T** | – | 4 | 5.5 | | | 71.5 | 70 | 68 | 66 | 63 | 60 | 56 | 52 | 47 | 42 | 445 | 350 | 795 | 240 | 135 |
| **CDLF12-7T** | – | 5.5 | 7.5 | | | 83.5 | 82 | 79.5 | 77 | 73.5 | 70 | 65.5 | 61 | 55 | 49 | 505 | 415 | 920 | 258 | 160 |
| **CDLF12-8T** | – | 5.5 | 7.5 | | H (m) | 95.5 | 94 | 91 | 88 | 84 | 80 | 75 | 70 | 63 | 56 | 535 | 415 | 950 | 258 | 160 |
| **CDLF12-9T** | – | 5.5 | 7.5 | | | 108 | 106 | 103 | 100 | 95.5 | 91 | 85 | 79 | 71.5 | 64 | 565 | 415 | 980 | 258 | 160 |
| **CDLF12-10T** | – | 7.5 | 10 | | | 120 | 118 | 114.5 | 111 | 106 | 101 | 94.5 | 88 | 80 | 72 | 595 | 415 | 1010 | 258 | 160 |
| **CDLF12-12T** | – | 7.5 | 10 | | | 143.5 | 141 | 137 | 133 | 127 | 121 | 113.5 | 106 | 96 | 86 | 655 | 415 | 1070 | 258 | 160 |
| **CDLF12-14T** | – | 11 | 15 | | | 168 | 165 | 160 | 155 | 148 | 141 | 132.5 | 124 | 112 | 100 | 750 | 500 | 1250 | 300 | 215 |
| **CDLF12-16T** | – | 11 | 15 | | | 192.5 | 189 | 183.5 | 178 | 170 | 162 | 152 | 142 | 128.5 | 115 | 810 | 500 | 1310 | 300 | 215 |
| **CDLF12-18T** | – | 11 | 15 | | | 217 | 213 | 207.5 | 202 | 192.5 | 183 | 171.5 | 160 | 145 | 130 | 870 | 500 | 1370 | 300 | 215 |

## RANGE CHARACTERISTICS


| | |
|---|---|
| **Rated flow** | 16 m³/h |
| **Flow range** | 8–22 m³/h |
| **Max. pressure** | 22 bar |
| **Motor power** | 2.2–15 kW |
| **Inlet / Outlet** | 2" / 2" |
| **Speed** | n ≈ 2900 /min |



## INSTALLATION SKETCH

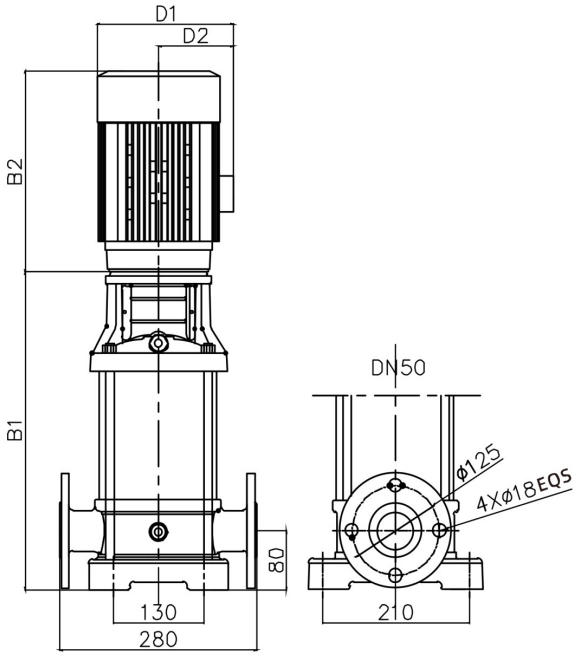


The overall dimensions with a single-phase or explosion-proof motor differ slightly.

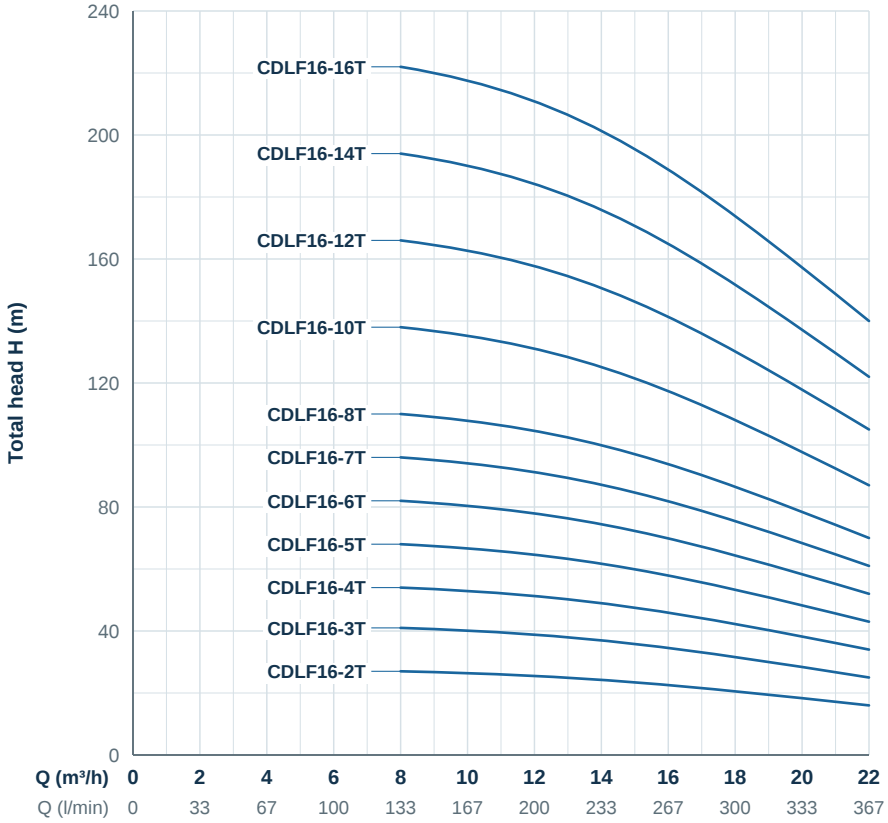


## PERFORMANCE DATA · DIMENSIONS


| MODEL | | $P_2$ | | Q | m³/h | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | SIZE (mm) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 133 | 167 | 200 | 233 | 267 | 300 | 333 | 367 | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF16-2T** | CDLFM16-2 | 2.2 | 3 | | | 27 | 26 | 25 | 24 | 22 | 21 | 19 | 16 | 310 | 280 | 590 | 180 | 135 |
| **CDLF16-3T** | CDLFM16-3 | 3 | 4 | | | 41 | 40 | 38 | 37 | 34 | 32 | 29 | 25 | 395 | 310 | 705 | 195 | 135 |
| **CDLF16-4T** | – | 4 | 5.5 | | | 54 | 53 | 52 | 49 | 46 | 43 | 38 | 34 | 440 | 350 | 790 | 240 | 135 |
| **CDLF16-5T** | – | 5.5 | 7.5 | | | 68 | 67 | 65 | 62 | 58 | 54 | 48 | 43 | 500 | 415 | 915 | 258 | 165 |
| **CDLF16-6T** | – | 5.5 | 7.5 | | | 82 | 80 | 78 | 74 | 70 | 64 | 58 | 52 | 545 | 415 | 960 | 258 | 165 |
| **CDLF16-7T** | – | 7.5 | 10 | **H (m)** | | 96 | 95 | 91 | 87 | 82 | 76 | 68 | 61 | 590 | 415 | 1005 | 258 | 165 |
| **CDLF16-8T** | – | 7.5 | 10 | | | 110 | 108 | 104 | 99 | 94 | 86 | 77 | 70 | 635 | 415 | 1050 | 258 | 220 |
| **CDLF16-10T** | – | 11 | 15 | | | 138 | 136 | 131 | 125 | 118 | 109 | 97 | 87 | 780 | 500 | 1280 | 300 | 220 |
| **CDLF16-12T** | – | 11 | 15 | | | 166 | 162 | 157 | 150 | 141 | 130 | 116 | 105 | 870 | 500 | 1370 | 300 | 220 |
| **CDLF16-14T** | – | 15 | 20 | | | 194 | 190 | 184 | 175 | 166 | 152 | 136 | 122 | 960 | 500 | 1460 | 300 | 220 |
| **CDLF16-16T** | – | 15 | 20 | | | 222 | 217 | 210 | 200 | 189 | 174 | 156 | 140 | 1050 | 500 | 1550 | 300 | 220 |

## RANGE CHARACTERISTICS


| | |
|---|---|
| **Rated flow** | 20 m³/h |
| **Flow range** | 10–28 m³/h |
| **Max. pressure** | 23 bar |
| **Motor power** | 1.1–18.5 kW |
| **Inlet / Outlet** | 2" / 2" |
| **Speed** | n ≈ 2900 /min |



## INSTALLATION SKETCH

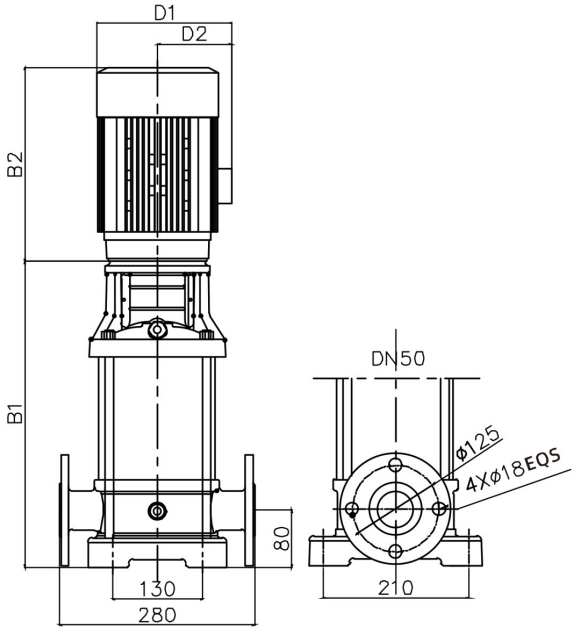


The overall dimensions with a single-phase or explosion-proof motor differ slightly.

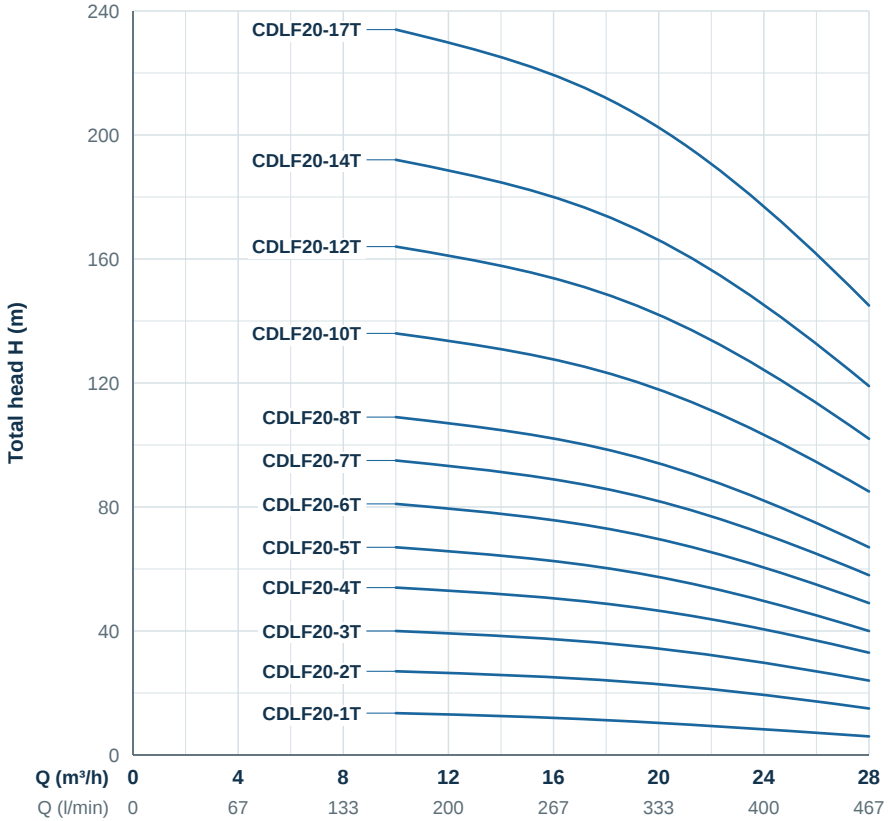


## PERFORMANCE DATA · DIMENSIONS

| MODEL | | $P_2$ | | Q | m³/h | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | SIZE (mm) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 167 | 200 | 233 | 267 | 300 | 333 | 367 | 400 | 433 | 467 | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF20-1T** | CDLFM20-1 | 1.1 | 1.5 | | | 13.5 | 13 | 12.5 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 290 | 240 | 530 | 180 | 135 |
| **CDLF20-2T** | CDLFM20-2 | 2.2 | 3 | | | 27 | 26.5 | 26 | 25 | 24 | 23 | 22 | 20 | 18 | 15 | 310 | 280 | 590 | 195 | 135 |
| **CDLF20-3T** | – | 4 | 5.5 | | | 40 | 39.5 | 39 | 38 | 37 | 35 | 33 | 30 | 27 | 24 | 395 | 350 | 745 | 240 | 135 |
| **CDLF20-4T** | – | 5.5 | 7.5 | | | 54 | 53 | 52 | 51 | 49 | 47 | 44 | 41 | 37 | 33 | 460 | 415 | 875 | 258 | 165 |
| **CDLF20-5T** | – | 5.5 | 7.5 | | | 67 | 66 | 64 | 62 | 60 | 58 | 55 | 50 | 45 | 40 | 505 | 415 | 920 | 258 | 165 |
| **CDLF20-6T** | – | 7.5 | 10 | | | 81 | 79 | 77 | 75 | 73 | 70 | 66 | 61 | 55 | 49 | 550 | 415 | 965 | 258 | 165 |
| **CDLF20-7T** | – | 7.5 | 10 | | | 95 | 93 | 91 | 89 | 86 | 82 | 77 | 71 | 65 | 58 | 645 | 415 | 1060 | 258 | 220 |
| **CDLF20-8T** | – | 11 | 15 | | | 109 | 107 | 105 | 102 | 99 | 94 | 89 | 82 | 75 | 67 | 690 | 500 | 1190 | 300 | 220 |
| **CDLF20-10T** | – | 11 | 15 | | | 136 | 134 | 131 | 128 | 124 | 118 | 111 | 103 | 95 | 85 | 780 | 500 | 1280 | 300 | 220 |
| **CDLF20-12T** | – | 15 | 20 | | | 164 | 162 | 158 | 154 | 149 | 142 | 133 | 124 | 114 | 102 | 870 | 500 | 1370 | 300 | 220 |
| **CDLF20-14T** | – | 15 | 20 | | | 192 | 189 | 185 | 180 | 174 | 166 | 156 | 145 | 133 | 119 | 960 | 500 | 1460 | 300 | 220 |
| **CDLF20-17T** | – | 18.5 | 25 | | | 234 | 230 | 225 | 219 | 212 | 202 | 190 | 177 | 162 | 145 | 1095 | 500 | 1595 | 300 | 220 |

H (m)

# CDLF32




Light stainless steel vertical multi-stage centrifugal pump | 50 Hz | n ≈ 2900 /min

## RANGE CHARACTERISTICS

| | |
|---|---|
| **Rated flow** | 32 m³/h |
| **Flow range** | 16–40 m³/h |
| **Max. pressure** | 29 bar |
| **Motor power** | 1.5–30 kW |
| **Inlet / Outlet** | 2.5" / 2.5" |
| **Speed** | n ≈ 2900 /min |




## INSTALLATION SKETCH

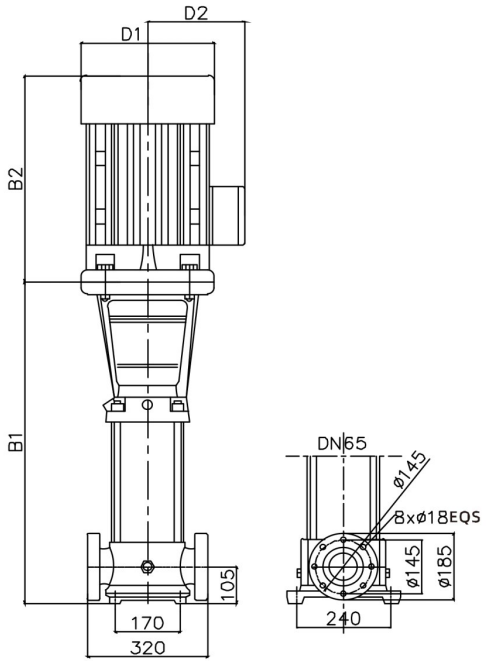


## DIMENSIONS

| MODEL | SIZE (mm) | | | | |
|---|---|---|---|---|---|
| | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF32-1-1T/CDLF32-1T** | 505 | 290 | 795 | 190 | 155 |
| **CDLF32-2-2T/CDLF32-2T** | 575 | 345/355 | 920/930 | 190/230 | 165/180 |
| **CDLF32-3-2T/CDLF32-3T** | 645 | 390 | 1035 | 260 | 180 |
| **CDLF32-4-2T/CDLF32-4T** | 715 | 390 | 1105 | 330 | 180 |
| **CDLF32-5-2T/CDLF32-5T** | 890 | 500 | 1390 | 330 | 255 |
| **CDLF32-6-2T/CDLF32-6T** | 960 | 500 | 1460 | 330 | 255 |
| **CDLF32-7-2T/CDLF32-7T** | 1030 | 500 | 1530 | 330 | 255 |
| **CDLF32-8-2T/CDLF32-8T** | 1100 | 500 | 1600 | 330 | 255 |
| **CDLF32-9-2T/CDLF32-9T** | 1170 | 550 | 1720 | 330 | 255 |
| **CDLF32-10-2T/CDLF32-10T** | 1240 | 550 | 1790 | 330 | 255 |
| **CDLF32-11-2T/CDLF32-11T** | 1310 | 575 | 1885 | 400 | 285 |
| **CDLF32-12-2T/CDLF32-12T** | 1380 | 575 | 1955 | 400 | 285 |
| **CDLF32-13-2T/CDLF32-13T** | 1450 | 650 | 2100 | 450 | 310 |
| **CDLF32-14-2T/CDLF32-14T** | 1520 | 650 | 2170 | 450 | 310 |
| **CDLF32-15-2T/CDLF32-15T** | 1590 | 650 | 2240 | 450 | 310 |
| **CDLF32-16-2T/CDLF32-16T** | 1660 | 650 | 2310 | 450 | 310 |

The overall dimensions with a single-phase or explosion-proof motor differ slightly.

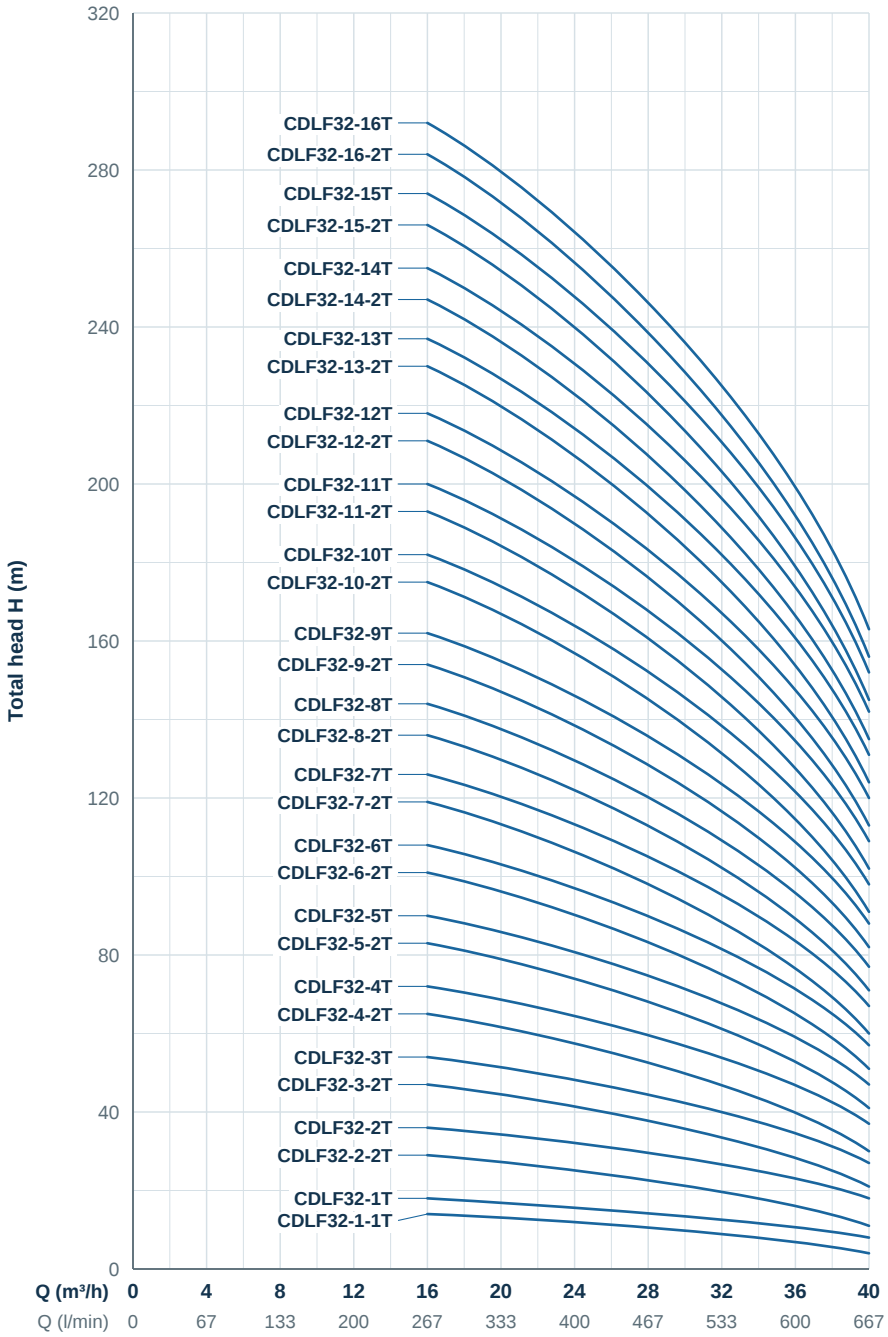

## PERFORMANCE DATA


| MODEL | | $P_2$ | | Q | m³/h | 16 | 20 | 24 | 28 | 32 | 36 | 40 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 267 | 333 | 400 | 467 | 533 | 600 | 667 |
| **CDLF32-1-1T** | CDLFM32-1-1 | 1.5 | 2 | | | 14 | 13 | 12 | 11 | 9 | 7 | 4 |
| **CDLF32-1T** | CDLFM32-1 | 2.2 | 3 | | | 18 | 17 | 15 | 14 | 13 | 11 | 8 |
| **CDLF32-2-2T** | CDLFM32-2-2 | 3 | 4 | | | 29 | 28 | 26 | 23 | 20 | 16 | 11 |
| **CDLF32-2T** | – | 4 | 5.5 | | | 36 | 34 | 32 | 29 | 27 | 23 | 18 |
| **CDLF32-3-2T** | – | 5.5 | 7.5 | | | 47 | 44 | 41 | 38 | 33 | 28 | 21 |
| **CDLF32-3T** | – | 5.5 | 7.5 | | | 54 | 51 | 48 | 44 | 40 | 35 | 27 |
| **CDLF32-4-2T** | – | 7.5 | 10 | | | 65 | 62 | 58 | 53 | 46 | 40 | 30 |
| **CDLF32-4T** | – | 7.5 | 10 | | | 72 | 69 | 65 | 59 | 53 | 47 | 37 |
| **CDLF32-5-2T** | – | 11 | 15 | | | 83 | 79 | 74 | 68 | 60 | 52 | 41 |
| **CDLF32-5T** | – | 11 | 15 | | | 90 | 86 | 81 | 74 | 67 | 59 | 47 |
| **CDLF32-6-2T** | – | 11 | 15 | | | 101 | 97 | 90 | 83 | 74 | 65 | 51 |
| **CDLF32-6T** | – | 11 | 15 | | | 108 | 104 | 97 | 90 | 81 | 72 | 57 |
| **CDLF32-7-2T** | – | 15 | 20 | | | 119 | 114 | 107 | 98 | 88 | 78 | 60 |
| **CDLF32-7T** | – | 15 | 20 | | | 126 | 121 | 113 | 105 | 95 | 85 | 67 |
| **CDLF32-8-2T** | – | 15 | 20 | | | 136 | 131 | 123 | 114 | 102 | 90 | 71 |
| **CDLF32-8T** | – | 15 | 20 | | | 144 | 138 | 130 | 120 | 109 | 97 | 77 |
| **CDLF32-9-2T** | – | 18.5 | 25 | | H (m) | 154 | 148 | 140 | 128 | 117 | 102 | 82 |
| **CDLF32-9T** | – | 18.5 | 25 | | | 162 | 156 | 147 | 136 | 124 | 109 | 88 |
| **CDLF32-10-2T** | – | 18.5 | 25 | | | 175 | 166 | 157 | 146 | 131 | 115 | 91 |
| **CDLF32-10T** | – | 18.5 | 25 | | | 182 | 173 | 164 | 152 | 138 | 122 | 98 |
| **CDLF32-11-2T** | – | 22 | 30 | | | 193 | 184 | 173 | 164 | 146 | 128 | 102 |
| **CDLF32-11T** | – | 22 | 30 | | | 200 | 191 | 180 | 168 | 153 | 135 | 109 |
| **CDLF32-12-2T** | – | 22 | 30 | | | 211 | 201 | 189 | 178 | 160 | 140 | 113 |
| **CDLF32-12T** | – | 22 | 30 | | | 218 | 208 | 196 | 184 | 167 | 147 | 120 |
| **CDLF32-13-2T** | – | 30 | 40 | | | 230 | 218 | 206 | 193 | 174 | 153 | 124 |
| **CDLF32-13T** | – | 30 | 40 | | | 237 | 225 | 213 | 200 | 181 | 160 | 131 |
| **CDLF32-14-2T** | – | 30 | 40 | | | 247 | 235 | 222 | 210 | 189 | 165 | 135 |
| **CDLF32-14T** | – | 30 | 40 | | | 255 | 242 | 229 | 216 | 196 | 172 | 142 |
| **CDLF32-15-2T** | – | 30 | 40 | | | 266 | 253 | 239 | 224 | 203 | 178 | 145 |
| **CDLF32-15T** | – | 30 | 40 | | | 274 | 260 | 246 | 231 | 210 | 185 | 152 |
| **CDLF32-16-2T** | – | 30 | 40 | | | 284 | 270 | 255 | 240 | 218 | 190 | 156 |
| **CDLF32-16T** | – | 30 | 40 | | | 292 | 277 | 262 | 246 | 225 | 197 | 163 |

## RANGE CHARACTERISTICS

| | |
|---|---|
| **Rated flow** | 42 m³/h |
| **Flow range** | 25–55 m³/h |
| **Max. pressure** | 30 bar |
| **Motor power** | 3–45 kW |
| **Inlet / Outlet** | 3" / 3" |
| **Speed** | n ≈ 2900 /min |




## INSTALLATION SKETCH

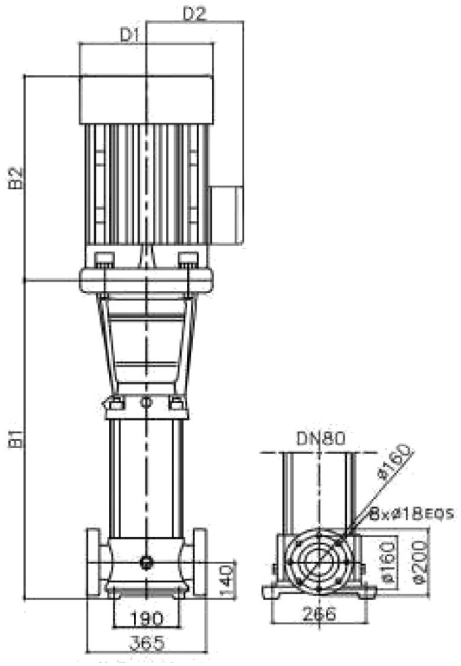


## DIMENSIONS

| MODEL | SIZE (mm) | | | | |
|---|---|---|---|---|---|
| | B1 | B2 | B1+B2 | D1 | D2 |
| **CDLF42-1-1T/CDLF42-1T** | 561 | 345/355 | 906/916 | 197/230 | 165/188 |
| **CDLF42-2-2T/CDLF42-2T** | 641 | 390 | 1031 | 260 | 208 |
| **CDLF42-3-2T/CDLF42-3T** | 826 | 500 | 1326 | 330 | 255 |
| **CDLF42-4-2T/CDLF42-4T** | 906 | 500 | 1406 | 330 | 255 |
| **CDLF42-5-2T/CDLF42-5T** | 986 | 550 | 1536 | 330 | 255 |
| **CDLF42-6-2T/CDLF42-6T** | 1066 | 575 | 1641 | 360 | 285 |
| **CDLF42-7-2T/CDLF42-7T** | 1146 | 650 | 1796 | 400 | 310 |
| **CDLF42-8-2T/CDLF42-8T** | 1226 | 650 | 1876 | 400 | 310 |
| **CDLF42-9-2T/CDLF42-9T** | 1306 | 650 | 1956 | 400 | 310 |
| **CDLF42-10-2T/CDLF42-10T** | 1386 | 650 | 2036 | 400 | 310 |
| **CDLF42-11-2T/CDLF42-11T** | 1466 | 685 | 2151 | 450 | 345 |
| **CDLF42-12-2T/CDLF42-12T** | 1546 | 685 | 2231 | 450 | 345 |
| **CDLF42-13-2T** | 1626 | 685 | 2311 | 450 | 345 |

The overall dimensions with a single-phase or explosion-proof motor differ slightly.

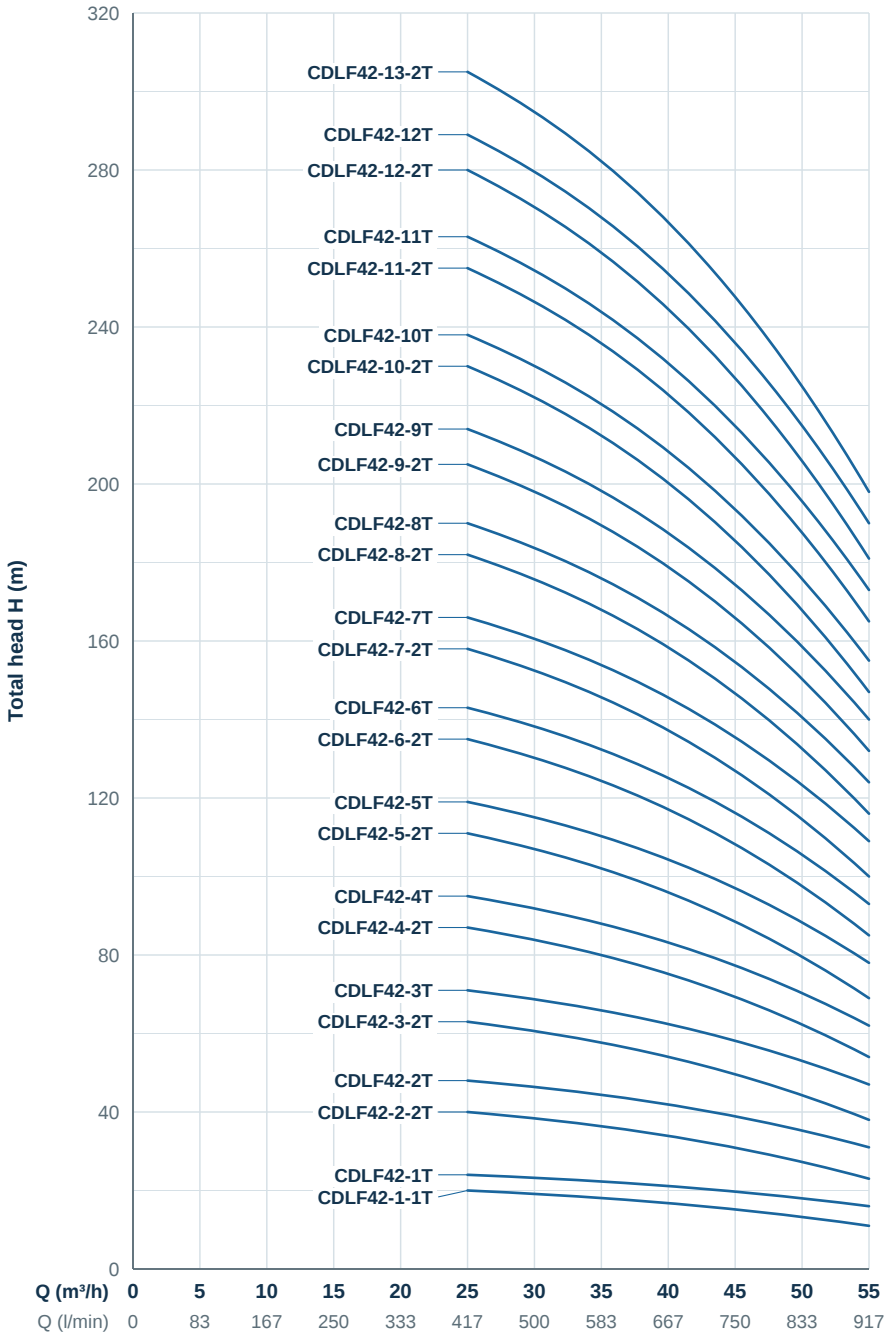

# CDLF42



## PERFORMANCE DATA

| MODEL | | $P_2$ | | Q | m³/h | 25 | 30 | 35 | 40 | 42 | 45 | 50 | 55 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380–415 V | 1~ 220–240 V | kW | HP | | l/min | 417 | 500 | 583 | 667 | 700 | 750 | 833 | 917 |
| **CDLF42-1-1T** | CDLFM42-1-1 | 3 | 4 | | | 20 | 19 | 18 | 17 | 16 | 15 | 13 | 11 |
| **CDLF42-1T** | – | 4 | 5.5 | | | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 16 |
| **CDLF42-2-2T** | – | 5.5 | 7.5 | | | 40 | 38 | 36 | 33 | 32 | 30 | 27 | 23 |
| **CDLF42-2T** | – | 7.5 | 10 | | | 48 | 46 | 44 | 42 | 41 | 39 | 35 | 31 |
| **CDLF42-3-2T** | – | 11 | 15 | | | 63 | 61 | 58 | 54 | 52 | 50 | 44 | 38 |
| **CDLF42-3T** | – | 11 | 15 | | | 71 | 69 | 66 | 63 | 61 | 58 | 53 | 47 |
| **CDLF42-4-2T** | – | 15 | 20 | | | 87 | 84 | 80 | 75 | 73 | 69 | 62 | 54 |
| **CDLF42-4T** | – | 15 | 20 | | | 95 | 92 | 88 | 84 | 81 | 78 | 71 | 62 |
| **CDLF42-5-2T** | – | 18.5 | 25 | | | 111 | 107 | 102 | 96 | 93 | 88 | 80 | 69 |
| **CDLF42-5T** | – | 18.5 | 25 | | | 119 | 115 | 110 | 105 | 101 | 97 | 88 | 78 |
| **CDLF42-6-2T** | – | 22 | 30 | | | 135 | 130 | 124 | 117 | 113 | 108 | 97 | 85 |
| **CDLF42-6T** | – | 22 | 30 | | | 143 | 138 | 132 | 125 | 122 | 116 | 106 | 93 |
| **CDLF42-7-2T** | – | 30 | 40 | **H (m)** | | 158 | 152 | 146 | 138 | 134 | 127 | 115 | 100 |
| **CDLF42-7T** | – | 30 | 40 | | | 166 | 161 | 154 | 146 | 142 | 135 | 124 | 109 |
| **CDLF42-8-2T** | – | 30 | 40 | | | 182 | 175 | 168 | 159 | 154 | 146 | 133 | 116 |
| **CDLF42-8T** | – | 30 | 40 | | | 190 | 184 | 176 | 167 | 162 | 154 | 141 | 124 |
| **CDLF42-9-2T** | – | 30 | 40 | | | 205 | 198 | 190 | 180 | 174 | 166 | 150 | 132 |
| **CDLF42-9T** | – | 37 | 50 | | | 214 | 207 | 198 | 188 | 183 | 174 | 159 | 140 |
| **CDLF42-10-2T** | – | 37 | 50 | | | 230 | 221 | 212 | 200 | 194 | 185 | 168 | 147 |
| **CDLF42-10T** | – | 37 | 50 | | | 238 | 230 | 220 | 209 | 203 | 193 | 177 | 155 |
| **CDLF42-11-2T** | – | 45 | 60 | | | 255 | 246 | 236 | 223 | 217 | 206 | 188 | 165 |
| **CDLF42-11T** | – | 45 | 60 | | | 263 | 255 | 244 | 232 | 225 | 214 | 196 | 173 |
| **CDLF42-12-2T** | – | 45 | 60 | | | 280 | 270 | 259 | 245 | 238 | 226 | 206 | 181 |
| **CDLF42-12T** | – | 45 | 60 | | | 289 | 280 | 268 | 255 | 247 | 236 | 216 | 190 |
| **CDLF42-13-2T** | – | 45 | 60 | | | 305 | 294 | 282 | 267 | 259 | 247 | 225 | 198 |