FC SERIES

FC

Stainless steel
submersible sewage pump



RANGE CHARACTERISTICS

Power	**2.2–7.5 kW**
Flow up to	**120 m³/h**
Head up to	**24 m**
Solids passage	**6–52 mm**

MATERIALS

Pump casing
Stainless Steel AISI 304

Motor casing
Stainless Steel AISI 304

Impeller
Stainless Steel AISI 304

Shaft
Stainless Steel AISI 304


Mechanical seal
SiC / SiC + Carbon / SiC

O-ring
NBR

WORKING CONDITIONS

Liquid temperature: 0 to +50 °C
Immersion depth: ≤ 5 m

PERFORMANCE DATA

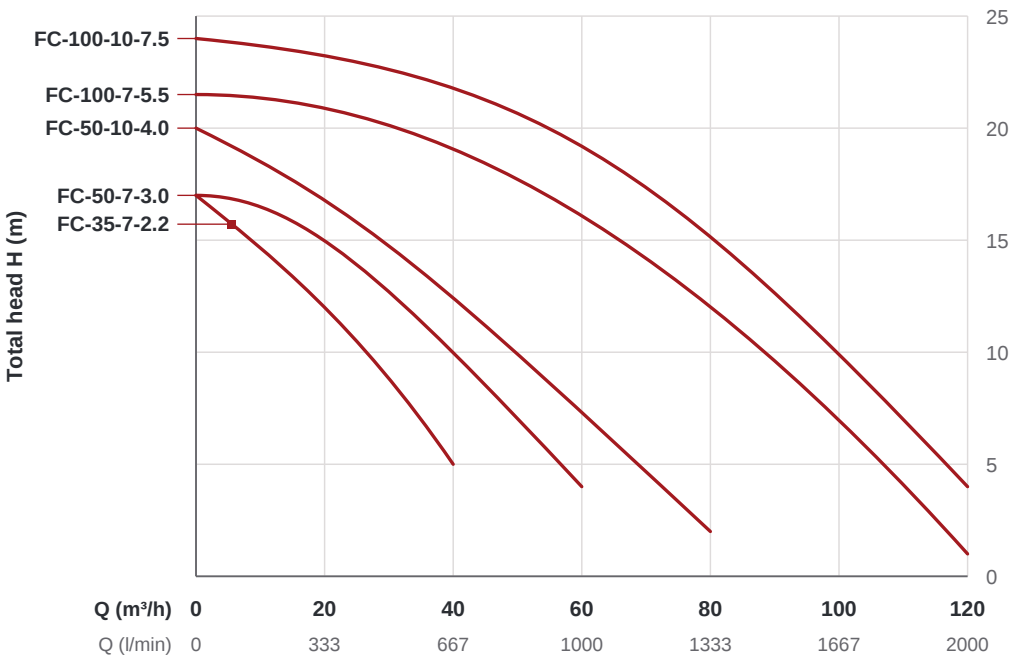

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q	m³/h / l/min	0 / 0	20 / 333	40 / 667	60 / 1000	80 / 1333	100 / 1667	120 / 2000
THREE-PHASE 3~ 380–415 V											
FC-35-7-2.2	2.2	3			17	12	5	–	–	–	–
FC-50-7-3.0	3	4			17	15	10	4	–	–	–
FC-50-10-4.0	4	5.5	**H (m)**		20	17	13	7	2	–	–
FC-100-7-5.5	5.5	7.5			21.5	21	19	16	12	7	1
FC-100-10-7.5	7.5	10			24	23	22	19	15	10	4

FEATURES

- Double-channel impeller with high flow capacity; passes suspended solids of 6–52 mm in diameter.
- Copper winding.
- All parts in contact with water are stainless steel; no rust.
- 10 m cable.

APPLICATION

- Suitable for clean water and sewage.
- Water supply, circulation and water changing for farming, forestry and fisheries.
- Equipment for gardening, aquariums, landscape waterfalls, water drainage and filtration.

PRODUCT NOMENCLATURE

Example: FC-35-7-2.2

FC	Stainless steel submersible sewage pump series
35	Rated flow (m³/h)
7	Rated head (m)
2.2	Power (kW)

FC SERIES

FC

Stainless steel
submersible sewage pump



RANGE CHARACTERISTICS

Power	**11–15 kW**
Flow up to	**250 m³/h**
Head up to	**30 m**
Solids passage	**6–52 mm**

MATERIALS

Pump casing
Stainless Steel AISI 304

Motor casing
Stainless Steel AISI 304

Impeller
Stainless Steel AISI 304

Shaft
Stainless Steel AISI 304

Mechanical seal
SiC / SiC + Carbon / SiC


O-ring
NBR

WORKING CONDITIONS

Liquid temperature: 0 to +50 °C
Immersion depth: ≤ 5 m

PERFORMANCE DATA

Redpump
Italy Standard

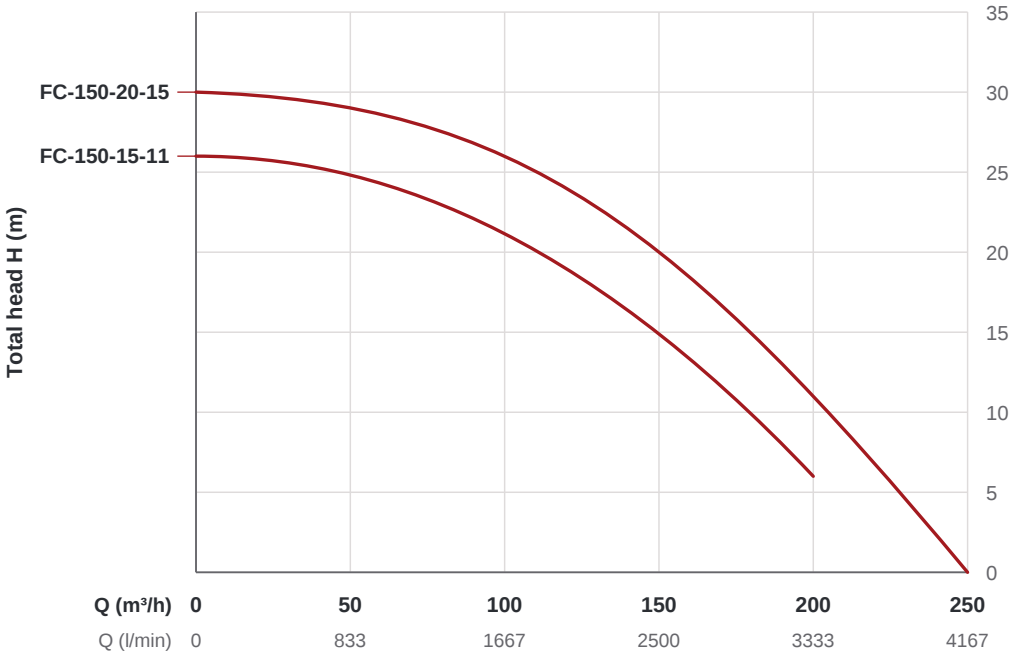

PERFORMANCE DATA

MODEL	P_2 kW	P_2 HP	Q	m³/h / l/min	0 / 0	50 / 833	100 / 1667	150 / 2500	200 / 3333	250 / 4167
THREE-PHASE 3~ 380–415 V										
FC-150-15-11	11	15	**H (m)**		26	25	21	15	6	–
FC-150-20-15	15	20			30	29	26	20	11	0

FEATURES

- Double-channel impeller with high flow capacity; passes suspended solids of 6–52 mm in diameter.
- Copper winding.
- All parts in contact with water are stainless steel; no rust.
- 10 m cable.

APPLICATION

- Suitable for clean water and sewage.
- Water supply, circulation and water changing for farming, forestry and fisheries.
- Equipment for gardening, aquariums, landscape waterfalls, water drainage and filtration.

PRODUCT NOMENCLATURE

Example: FC-150-15-11

FC	Stainless steel submersible sewage pump series
150	Rated flow (m³/h)
15	Rated head (m)
11	Power (kW)

FC

Stainless steel
submersible sewage pump


SPARE PARTS

1	Cable
2	Press nut
3	Pressure washer
4	Cable head
5	Cross recessed pan head screw and washer assembly
6	O-ring
7	Acorn nut
8	Spring washer
9	Washer
10	Handle
11	Upper cover
12	Plastic spacer
13	Cross recessed pan head screw and washer assembly
14	Terminal
15	Hexagon socket head cap screw
16	Spring washer
17	Washer
18	Hexagon socket head cap screw
19	Motor base
20	Rear flange cover
21	Three-wave washer
22	Bearing
23	Stator assembly
24	Rotor assembly
25	Bearing
26	Front cover
27	Mechanical seal
28	Mechanical flat pad
29	External circlip
30	O-ring
31	Pump cover
32	Mechanical seal
33	O-ring
34	Impeller
35	Key
36	Washer
37	Spring washer
38	Hexagon bolt
39	Pump casing
40	Acorn nut


CONSTRUCTION & INSTALLATION

Redpump
Italy Standard

CONSTRUCTION

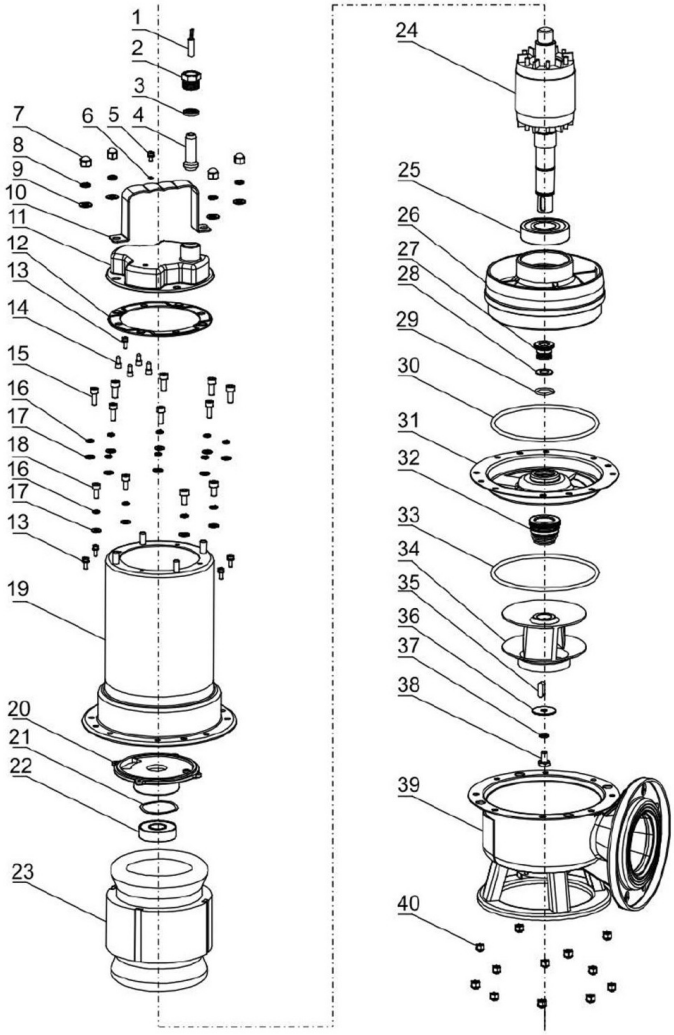

INSTALLATION

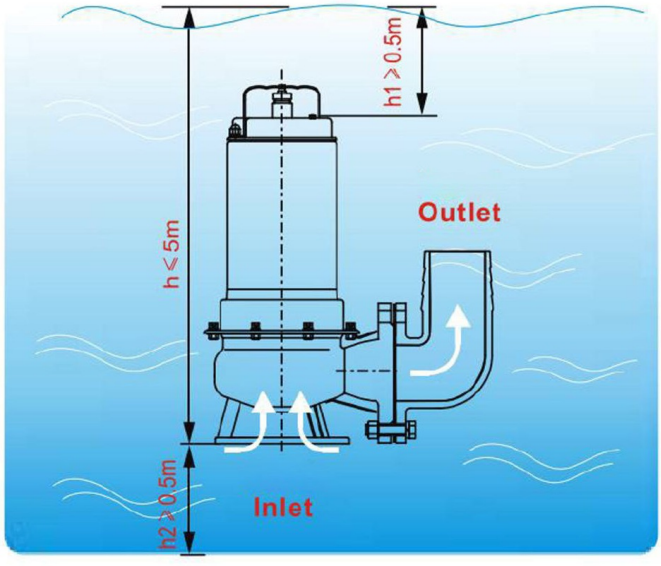

MATERIALS

Pump casing
Stainless Steel AISI 304

Motor casing
Stainless Steel AISI 304

Impeller
Stainless Steel AISI 304

Shaft
Stainless Steel AISI 304

Mechanical seal
SiC / SiC + Carbon / SiC

O-ring
NBR

WORKING CONDITIONS

Liquid temperature: 0 to +50 °C
Immersion depth: ≤ 5 m