KTZ SERIES

KTZ

Submersible
drainage pump



RANGE CHARACTERISTICS

Power
1.5 – 15 kW

Discharge
50 – 150 mm

Max. flow rate
156 m³/h

Max. head
56 m

Speed
n ≈ 2850 /min

Power supply
3~ 380–415 V

Frequency
50 Hz

SPECIFICATION

Insulation class
F

Protection class
IP68

Cable length
8 m

Water temperature
up to 40 °C

Max. water depth
25 m

OVERVIEW & CONSTRUCTION

50 Hz | n ≈ 2850 /min

- The motor and pump bodies are made of rigid cast iron for long-lasting durability.
- A mechanical seal resistant to high pressure greatly increases the maximum submersion depth.
- The semi-open impeller made of high chrome alloy, matched with a ductile iron wear plate, achieves superior durability.
- The discharge channel is cast as part of the motor housing for effective motor cooling. The top outlet saves space.
- Discharge 50 mm (2") to 150 mm (6"), motor 1.5 kW (2 HP) to 15 kW (20 HP).
- Hermetically sealed motor with built-in thermal protection for power ratings up to 15 kW.


APPLICATIONS

- Civil engineering
- Mines, quarries, coal ore & slurries
- Sewage treatment plants
- General pumping purposes

ON REQUEST

- Other voltages
- Optional cable length

CONSTRUCTION & MATERIALS

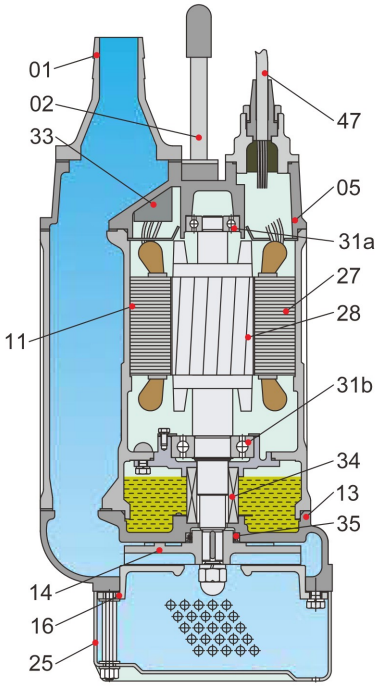

No.	Part name	Material
01	Hose coupling	Cast iron
02	Handle	Rubber & steel
05	Upper cover	Cast iron
11	Motor body	Cast iron
13	Pump body	Cast iron
14	Impeller	High chrome alloy
16	Inlet plate	Ductile iron
25	Strainer	Steel

No.	Part name	Material
27	Stator	–
28	Rotor	Shaft: AISI420SS
31a	Bearing	Ball bearing
31b	Bearing	Ball bearing
33	Motor protector	–
34	Mechanical seal	SiC-SiC/Carbon-SiC (≤ 2.2 kW) SiC-SiC/SiC-SiC (≥ 3.7 kW)
35	Oil seal	–
47	Cable	–

KTZ SERIES

KTZ

Submersible
drainage pump



RANGE CHARACTERISTICS

Power
1.5 – 15 kW

Discharge
50 – 150 mm

Max. flow rate
156 m³/h

Max. head
56 m

Speed
n ≈ 2850 /min

Power supply
3~ 380–415 V

Frequency
50 Hz

SPECIFICATION

Insulation class
F

Protection class
IP68

Cable length
8 m

Water temperature
up to 40 °C

Max. water depth
25 m

APPLICATIONS

Civil engineering
Mines, quarries, coal ore & slurries
Sewage treatment plants
General pumping purposes

ON REQUEST

Other voltages
Optional cable length


PERFORMANCE DATA

50 Hz | n ≈ 2850 /min

Redpump
Italy Standard

KTZ 1.5 – 5.5 kW


Q–H curves and performance data

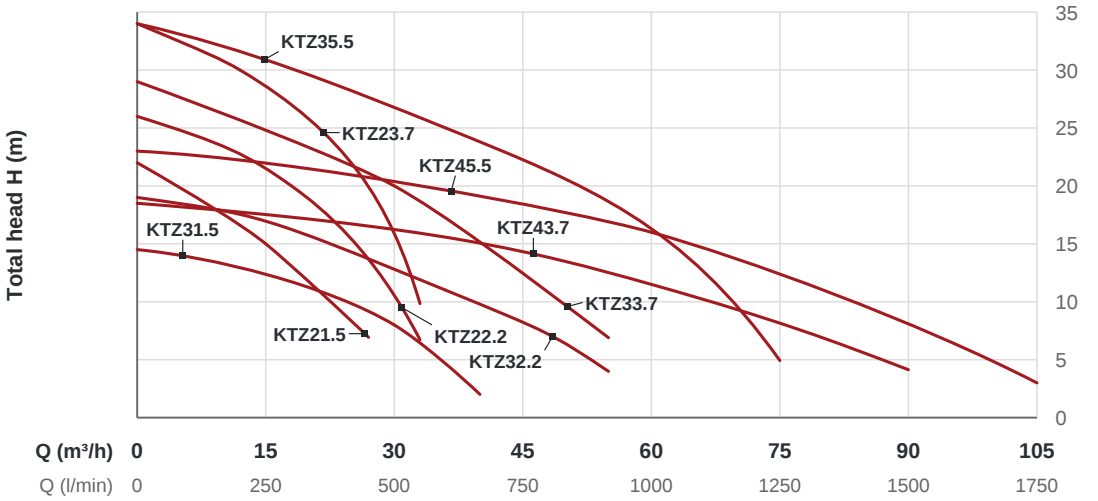

MODEL	Outlet	P_2		Rated current	Rated capacity Q		Rated head H	Max. capacity Q		Max. head H	Impeller passage
	mm	kW	HP	A (400 V)	m³/h	l/min	m	m³/h	l/min	m	mm
KTZ21.5	50	1.5	2	3.5	**15**	250	**15**	27	450	22	8.5
KTZ31.5	80	1.5	2	3.5	**30**	500	**8**	40	667	14.5	8.5
KTZ22.2	50	2.2	3	5.0	**18**	300	**20**	33	550	26	8.5
KTZ32.2	80	2.2	3	5.0	**36**	600	**11**	55	917	19	8.5
KTZ23.7	50	3.7	5	7.7	**12**	200	**30**	33	550	34	8.5
KTZ33.7	80	3.7	5	7.7	**30**	500	**20**	55	917	29	8.5
KTZ43.7	100	3.7	5	7.7	**60**	1000	**11.5**	90	1500	18.5	8.5
KTZ35.5	80	5.5	7.5	11.4	**36**	600	**25**	75	1250	34	8.5
KTZ45.5	100	5.5	7.5	11.4	**60**	1000	**16**	105	1750	23	8.5

KTZ 7.5 – 15 kW

Q–H curves and performance data

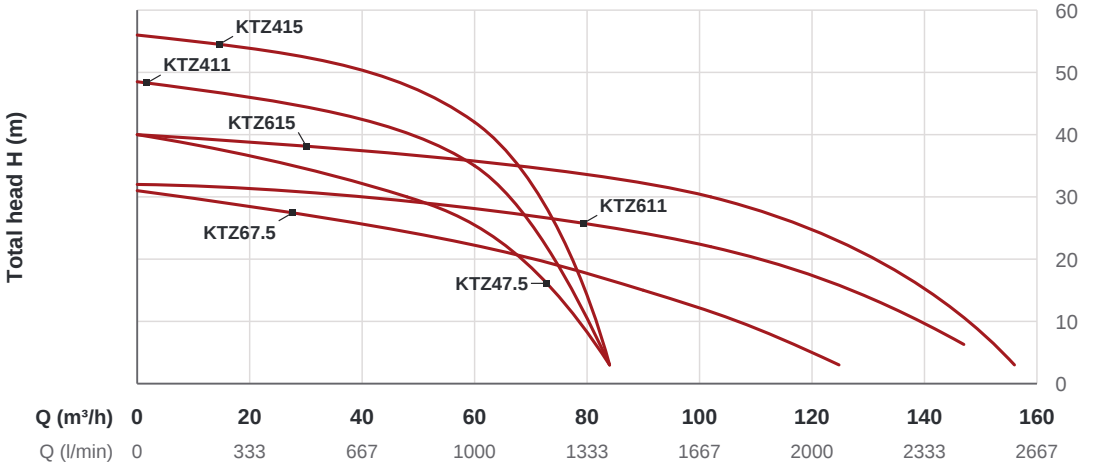

MODEL	Outlet	P_2		Rated current	Rated capacity Q		Rated head H	Max. capacity Q		Max. head H	Impeller passage
	mm	kW	HP	A (400 V)	m³/h	l/min	m	m³/h	l/min	m	mm
KTZ47.5	100	7.5	10	15	**48**	800	**30**	84	1400	40	11.5
KTZ67.5	150	7.5	10	15	**90**	1500	**15**	124.8	2080	31	19.5
KTZ411	100	11	15	22	**60**	1000	**35**	84	1400	48.5	11.5
KTZ611	150	11	15	22	**102**	1700	**22**	147	2450	32	19.5
KTZ415	100	15	20	29.5	**60**	1000	**42**	84	1400	56	11.5
KTZ615	150	15	20	29.5	**102**	1700	**30**	156	2600	40	19.5

KTZ SERIES

KTZ

Submersible
drainage pump



RANGE CHARACTERISTICS

Power
1.5 – 15 kW

Discharge
50 – 150 mm

Max. flow rate
156 m³/h

Max. head
56 m

Speed
n ≈ 2850 /min

Power supply
3~ 380–415 V

Frequency
50 Hz

SPECIFICATION

Insulation class
F

Protection class
IP68

Cable length
8 m

Water temperature
up to 40 °C

Max. water depth
25 m


DIMENSIONS

50 Hz | n ≈ 2850 /min

Redpump
Italy Standard

KTZ OUTLINE DRAWING

W1: Continuous running water level

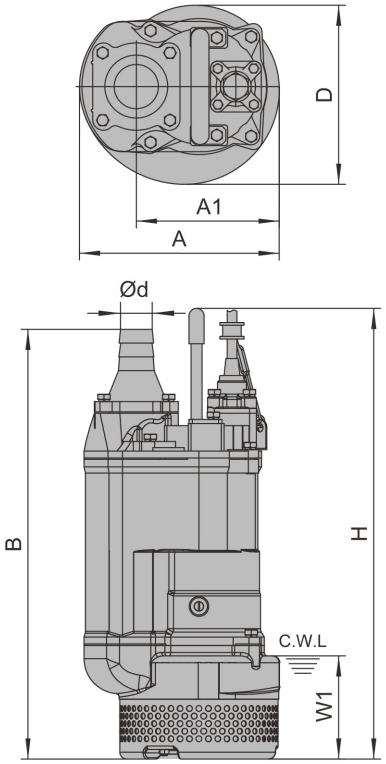

KTZ DIMENSIONS

mm

MODEL	d mm	A mm	A1 mm	B mm	D mm	H mm	W1 mm	Packing dimension mm
KTZ21.5	50	235	173	535	216	505	120	610x265x265
KTZ31.5	80	235	173	535	216	505	120	610x265x265
KTZ22.2	50	235	173	535	216	505	120	610x265x265
KTZ32.2	80	235	173	535	216	505	120	610x265x265
KTZ23.7	50	283	208	628	252	629	150	710x320x295
KTZ33.7	80	283	208	628	252	629	150	710x320x295
KTZ43.7	100	283	208	642	252	629	150	710x320x295
KTZ35.5	80	283	208	671	252	590	150	750x350x360
KTZ45.5	100	283	208	686	252	590	150	750x350x360
KTZ47.5	100	330	240	764	314	676	190	835x365x385
KTZ67.5	150	330	240	790	314	676	190	865x365x385
KTZ411	100	373	255	807	350	695	190	885x415x435
KTZ611	150	373	255	807	350	695	190	885x415x435
KTZ415	100	373	255	842	350	755	190	935x415x435
KTZ615	150	373	255	842	350	755	190	935x415x435

LH

Submersible
drainage pump



RANGE CHARACTERISTICS

Power
22 – 110 kW

Discharge
100 – 200 mm

Max. flow rate
408 m³/h

Max. head
200 m

Speed
n ≈ 2850 /min

Power supply
3~ 380–415 V

Frequency
50 Hz

SPECIFICATION

Insulation class
F

Protection class
IP68

Cable length
20 m

Water temperature
up to 40 °C

Max. water depth
30 m

Starting method
Star-Delta

OVERVIEW & CONSTRUCTION

50 Hz | n ≈ 2850 /min

Redpump
Italy Standard

- The motor and pump bodies are made of hard cast iron for long-lasting durability.
- A mechanical seal resistant to high pressure greatly increases the maximum submersion depth.
- The hydraulic part is located under the motor, and the motor is cooled by the pumped water for safe operation even when the pump is only partially immersed. The top outlet design saves space.
- Equipped with a hermetically sealed motor.
- Discharge 100 mm (4") to 200 mm (8"), motor 22 kW (30 HP) to 110 kW (150 HP).
- The motor is a dry-type submersible induction motor (2 poles).

APPLICATIONS


- Deep-well pre-dewatering or high-head dewatering
- Civil engineering and construction works
- Mines, quarries, coal ore & slurries
- Sewage treatment plants
- General pumping purposes

ON REQUEST

- Other voltages
- Optional cable length

CONSTRUCTION & MATERIALS

Sectional drawing: 22 – 75 kW

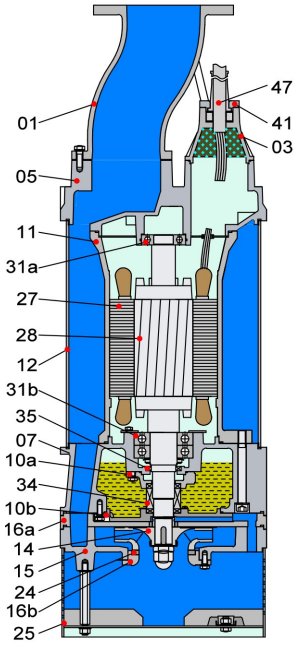

No.	Part name	Material
01	Hose coupling	Ductile iron
03	Terminal box	Cast iron
05	Upper cover	Cast iron
07	Bearing housing	Cast iron
10a	Seal bracket	Cast iron
10b	Seal bracket	Cast iron
11	Motor body	Cast iron
12	Outer casing	Steel
14	Impeller	High chrome alloy
15	Diffuser	Ductile iron
16a	Inlet plate	Ductile iron

No.	Part name	Material
16b	Inlet plate	Cast iron
24	Neck ring	High chrome alloy
25	Strainer	AISI304SS
27	Stator	–
28	Rotor	Shaft: AISI420SS
31a	Bearing	Ball bearing
31b	Bearing	Ball bearing
34	Mechanical seal	TC-SiC/SiC-SiC
35	Oil seal	–
41	Shim	Cast iron
47	Cable	–

LH SERIES

LH

Submersible drainage pump



RANGE CHARACTERISTICS

Power
22 – 110 kW

Discharge
100 – 200 mm

Max. flow rate
408 m³/h

Max. head
200 m

Speed
n ≈ 2850 /min

Power supply
3~ 380–415 V

Frequency
50 Hz

SPECIFICATION

Insulation class
F

Protection class
IP68

Cable length
20 m

Water temperature
up to 40 °C

Max. water depth
30 m

Starting method
Star-Delta

APPLICATIONS

Deep-well pre-dewatering or high-head dewatering
Civil engineering and construction works
Mines, quarries, coal ore & slurries
Sewage treatment plants
General pumping purposes

ON REQUEST

Other voltages
Optional cable length


PERFORMANCE DATA

50 Hz | n ≈ 2850 /min

Redpump
Italy Standard

LH Outlet 100 – 150 mm

Q–H curves and performance data

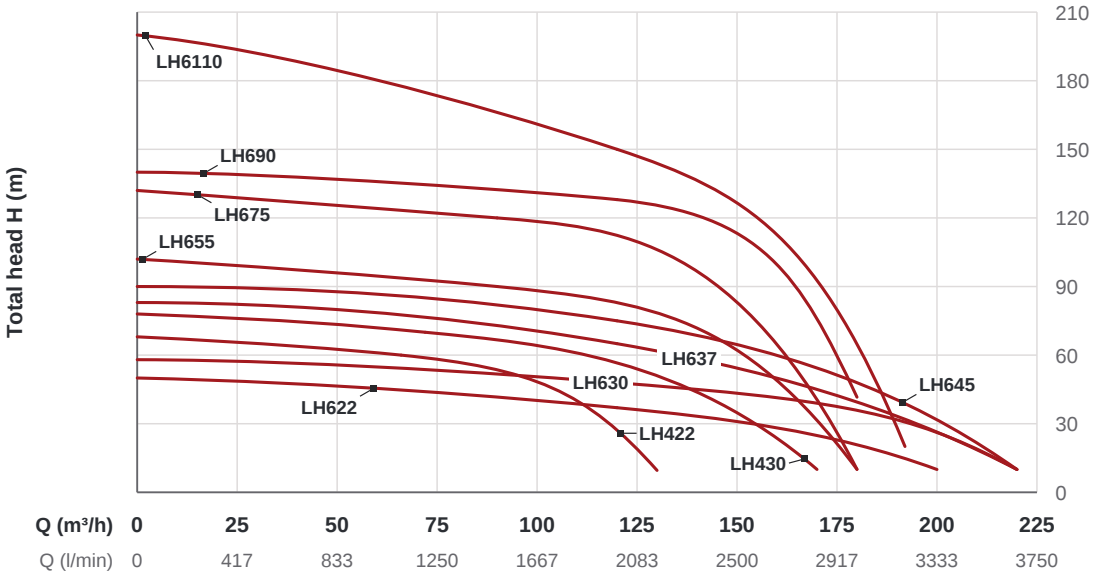


Q (m³/h)	0	25	50	75	100	125	150	175	200	225
Q (l/min)	0	417	833	1250	1667	2083	2500	2917	3333	3750

MODEL	Outlet	P_2		Rated current	Rated capacity Q		Rated head H	Max. capacity Q		Max. head H	Impeller passage
	mm	kW	HP	A	m³/h	l/min	m	m³/h	l/min	m	mm
LH422	100	22	30	41.5	**66**	1100	**60**	130	2167	68	6
LH430	100	30	40	54	**72**	1200	**70**	170	2833	78	6
LH622	150	22	30	41.5	**120**	2000	**37**	200	3333	50	15
LH630	150	30	40	54	**140**	2333	**45**	220	3667	58	15
LH637	150	37	50	66	**120**	2000	**65**	220	3667	83	6
LH645	150	45	60	80	**120**	2000	**75**	220	3667	90	6
LH655	150	55	75	100	**90**	1500	**90**	180	3000	102	8
LH675	150	75	100	134	**90**	1500	**120**	180	3000	132	8
LH690	150	90	120	162	**120**	2000	**128**	180	3000	140	10
LH6110	150	110	150	198	**120**	2000	**150**	192	3200	200	8

LH Outlet 200 mm

Q–H curves and performance data

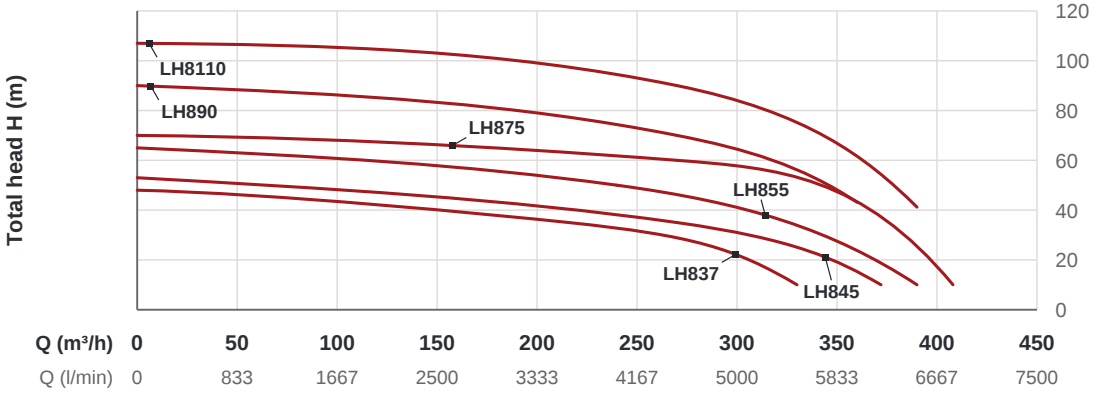

Q (m³/h)	0	50	100	150	200	250	300	350	400	450
Q (l/min)	0	833	1667	2500	3333	4167	5000	5833	6667	7500

MODEL	Outlet	P_2		Rated current	Rated capacity Q		Rated head H	Max. capacity Q		Max. head H	Impeller passage
	mm	kW	HP	A	m³/h	l/min	m	m³/h	l/min	m	mm
LH837	200	37	50	66	**216**	3600	**35**	330	5500	48	20
LH845	200	45	60	80	**270**	4500	**35**	372	6200	53	20
LH855	200	55	75	100	**240**	4000	**50**	390	6500	65	20
LH875	200	75	100	134	**270**	4500	**60**	408	6800	70	20
LH890	200	90	120	162	**270**	4500	**70**	360	6000	90	20
LH8110	200	110	150	198	**270**	4500	**90**	390	6500	107	20

LH

Submersible
drainage pump



RANGE CHARACTERISTICS

Power
22 – 110 kW

Discharge
100 – 200 mm

Max. flow rate
408 m³/h

Max. head
200 m

Speed
n ≈ 2850 /min

Power supply
3~ 380–415 V

Frequency
50 Hz

SPECIFICATION

Insulation class
F

Protection class
IP68

Cable length
20 m

Water temperature
up to 40 °C

Max. water depth
30 m

Starting method
Star-Delta


DIMENSIONS

50 Hz | n ≈ 2850 /min

Redpump
Italy Standard

LH OUTLINE DRAWING

C.W.L: Continuous running water level

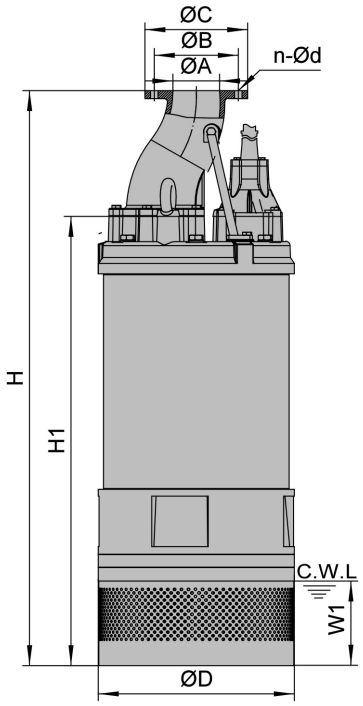

LH DIMENSIONS

mm

MODEL	A mm	B mm	C mm	n-Ød mm	D mm	H mm	H1 mm	W1 mm	Packing dimension mm
LH422	100	180	220	8-Ø17.5	420	1374	1072	240	1495x490x700
LH430	100	180	220	8-Ø17.5	420	1374	1072	240	1495x490x700
LH622	150	240	285	8-Ø22	420	1434	1082	250	1565x490x700
LH630	150	240	285	8-Ø22	420	1434	1082	250	1565x490x700
LH637	150	240	285	8-Ø22	530	1424	1072	180	1555x600x850
LH645	150	240	285	8-Ø22	530	1424	1072	180	1555x600x850
LH837	200	295	340	12-Ø22	530	1474	1072	180	1605x600x850
LH845	200	295	340	12-Ø22	530	1474	1072	180	1605x600x850
LH655	150	240	285	8-Ø22	550	1630	1280	200	1765x620x910
LH675	150	240	285	8-Ø22	550	1630	1280	200	1765x620x910
LH855	200	295	340	12-Ø22	550	1680	1280	200	1815x620x910
LH875	200	295	340	12-Ø22	550	1680	1280	200	1815x620x910
LH690	150	250	300	8-Ø26	592	1687	1282	200	1825x665x965
LH890	200	295	340	12-Ø22	592	1687	1282	200	1825x665x965
LH6110	150	250	300	8-Ø26	592	1793	1388	370	1875x665x965
LH8110	200	295	340	12-Ø22	592	1687	1282	200	1825x665x965