2CDX SERIES

# 2CDX

## 2CDX70 / 120 / 200

Stainless steel horizontal twin-impeller centrifugal pump



## KEY DATA

| | |
|---|---|
| Rated power | **0.75–3.7 kW** |
| Capacity Q | **1.2–12.6 m³/h** |
| Total head H | **27–71.5 m** |
| Motor | **2-pole, 50 Hz** |
| Voltage 1~ | **220–240 V** |
| Voltage 3~ | **380–415 V** |
| Insulation class | **F** |
| Protection | **IP55** |
| Suction DNA | **G1¼ / G1½** |
| Discharge DNM | **1"** |

## OPERATING CONDITIONS

- Maximum working pressure: 8 bar
- Maximum liquid temperature: 110 °C


## MATERIALS

- Pump body, impeller, diffuser and casing cover in AISI 304
- Shaft in AISI 304
- Bracket and motor casing in aluminium
- Mechanical seal in carbon/ceramic/NBR

# PERFORMANCE & TECHNICAL DATA

50 Hz | 2-pole motor

Redpump
Italy Standard

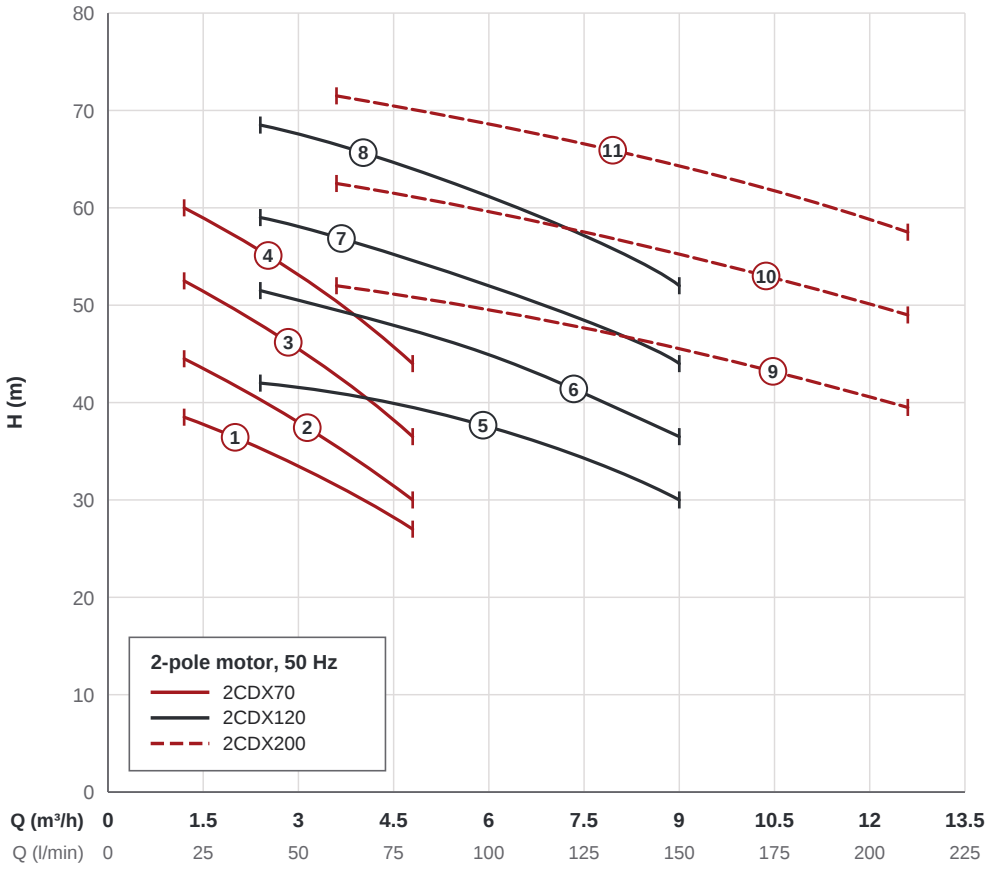


## PERFORMANCE DATA

| No. | MODEL 3~ 380–415 V | MODEL 1~ 220–240 V | $P_2$ kW | I (A) 1~ | I (A) 3~ | CAPACITY Q / TOTAL HEAD H (m) m³/h | 1.2 | 2.4 | 3.6 | 4.8 | 7.2 | 9 | 10.8 | 12.6 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | l/min | 20 | 40 | 60 | 80 | 120 | 150 | 180 | 210 |
| **2CDX70** | | | | | | | | | | | | | | |
| 1 | **2CDX70/10** | 2CDXM70/10 | 0.75 | 6.0 | 2.3 | | 38.5 | 35.3 | 31.5 | 27 | – | – | – | – |
| 2 | **2CDX70/12** | 2CDXM70/12 | 0.9 | 7.0 | 2.9 | | 44.5 | 40.3 | 35.5 | 30 | – | – | – | – |
| 3 | **2CDX70/15** | 2CDXM70/15 | 1.1 | 8.0 | 3.2 | | 52.5 | 48 | 42.8 | 36.5 | – | – | – | – |
| 4 | **2CDX70/20** | 2CDXM70/20 | 1.5 | 9.9 | 4.0 | | 60 | 55.6 | 50.4 | 44 | – | – | – | – |
| **2CDX120** | | | | | | | | | | | | | | |
| 5 | **2CDX120/15** | 2CDXM120/15 | 1.1 | 8.3 | 3.2 | | – | 42 | 41 | 39.5 | 35 | 30 | – | – |
| 6 | **2CDX120/20** | 2CDXM120/20 | 1.5 | 10.2 | 4.0 | | – | 51.5 | 49.5 | 47.4 | 41.8 | 36.5 | – | – |
| 7 | **2CDX120/30** | 2CDXM120/30 | 2.2 | 12.6 | 5.0 | | – | 59 | 57 | 54.6 | 49.2 | 44 | – | – |
| 8 | **2CDX120/40** | 2CDXM120/40 | 3.0 | 15.6 | 6.2 | | – | 68.5 | 66.5 | 64 | 58 | 52 | – | – |
| **2CDX200** | | | | | | | | | | | | | | |
| 9 | **2CDX200/30** | 2CDXM200/30 | 2.2 | 15.1 | 6.0 | | – | – | 52 | 50.8 | 48.1 | 45.5 | 42.7 | 39.5 |
| 10 | **2CDX200/40** | 2CDXM200/40 | 3.0 | 16.6 | 6.6 | | – | – | 62.5 | 61.1 | 58 | 55.2 | 52.3 | 49 |
| 11 | **2CDX200/50** | – | 3.7 | – | 8.7 | | – | – | 71.5 | 70.1 | 67 | 64.3 | 61.2 | 57.5 |

## MOTOR

- T.E.F.C. 2-pole motor
- Permanent split capacitor and automatic thermal overload protection for single-phase version
- Thermal protection to be provided by the user for three-phase version

## APPLICATIONS

- Pressure boosting
- Water supply
- Water treatment and irrigation
- Air conditioning systems
- General water pumping, including moderately aggressive liquids

2CDX SERIES

# 2CDX

## 2CDX70 / 120 / 200


Stainless steel horizontal twin-impeller centrifugal pump

### DIMENSIONS

- Dimensions in mm
- Suction DNA: G1¼, 2CDX200: G1½
- Discharge DNM: 1"
- Fixing holes: 2–øS
- T, V = cable gland (single-phase / three-phase version)

## DIMENSIONS

50 Hz | 2-pole motor

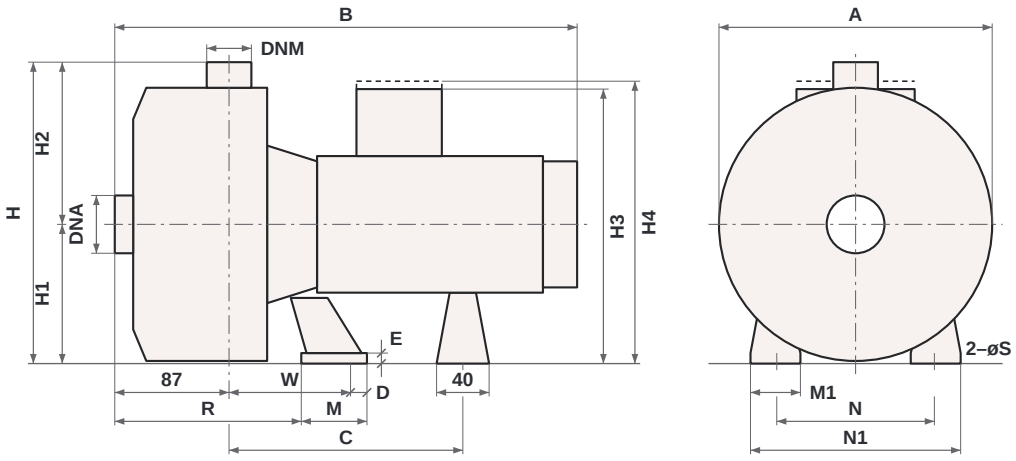


### DIMENSIONS

| MODEL | | DIMENSIONS (mm) | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ | 1~ | A | B | C | H | H1 | H2 | H3 | H4 | M | M1 | N | N1 | R | W |
| **2CDX70** | | | | | | | | | | | | | | | |
| **2CDX70/10** | 2CDXM70/10 | 208 | 355 | 182 | 229 | 106 | 123 | 209 | 215 | 50 | 38 | 120 | 160 | 142.5 | 93 |
| **2CDX70/12** | 2CDXM70/12 | 208 | 355 | 182 | 229 | 106 | 123 | 209 | 215 | 50 | 38 | 120 | 160 | 142.5 | 93 |
| **2CDX70/15** | 2CDXM70/15 | 232 | 380 | 199 | 250 | 118 | 132 | 235 | 249 | 55 | 40 | 140 | 180 | 140 | 95.5 |
| **2CDX70/20** | 2CDXM70/20 | 232 | 385 | 199 | 250 | 118 | 132 | 235 | 249 | 55 | 40 | 140 | 180 | 140 | 95.5 |
| **2CDX120** | | | | | | | | | | | | | | | |
| **2CDX120/15** | 2CDXM120/15 | 208 | 380 | 199 | 229 | 106 | 123 | 223 | 237 | 55 | 40 | 140 | 180 | 140 | 95.5 |
| **2CDX120/20** | 2CDXM120/20 | 208 | 380 | 199 | 229 | 106 | 123 | 223 | 237 | 55 | 40 | 140 | 180 | 140 | 95.5 |
| **2CDX120/30** | 2CDXM120/30 | 232 | 390 | 209.5 | 250 | 118 | 132 | 240 | – | 65 | 40 | 140 | 180 | 145 | 110.5 |
| **2CDX120/40** | 2CDXM120/40 | 232 | 420 | 231.5 | 250 | 118 | 132 | 240 | – | 65 | 40 | 140 | 180 | 145 | 110.5 |
| **2CDX200** | | | | | | | | | | | | | | | |
| **2CDX200/30** | 2CDXM200/30 | 208 | 394 | 210 | 229 | 106 | 123 | 240 | – | 65 | 40 | 140 | 180 | 145 | 110.5 |
| **2CDX200/40** | 2CDXM200/40 | 232 | 420 | 231.5 | 250 | 118 | 132 | 240 | – | 65 | 40 | 140 | 180 | 145 | 110.5 |
| **2CDX200/50** | – | 232 | 445 | 231.5 | 250 | 118 | 132 | 252 | – | 68 | 50 | 160 | 210 | 145 | 110 |

### BASE, CABLE GLAND, PORT

| MODEL | | DIMENSIONS (mm) | | | GLAND | | DNA |
|---|---|---|---|---|---|---|---|
| 3~ | 1~ | D | E | S | T 1~ | V 3~ | |
| **2CDX70** | | | | | | | |
| **2CDX70/10** | 2CDXM70/10 | 12.5 | 8 | 9 | PG11 | PG11 | G1¼ |
| **2CDX70/12** | 2CDXM70/12 | 12.5 | 8 | 9 | PG11 | PG11 | G1¼ |
| **2CDX70/15** | 2CDXM70/15 | 12.5 | 8 | 9 | PG13.5 | PG11 | G1¼ |
| **2CDX70/20** | 2CDXM70/20 | 12.5 | 8 | 9 | PG13.5 | PG11 | G1¼ |
| **2CDX120** | | | | | | | |
| **2CDX120/15** | 2CDXM120/15 | 12.5 | 8 | 9 | PG13.5 | PG11 | G1¼ |
| **2CDX120/20** | 2CDXM120/20 | 12.5 | 8 | 9 | PG13.5 | PG11 | G1¼ |
| **2CDX120/30** | 2CDXM120/30 | 12.5 | 8 | 9 | – | PG13.5 | G1¼ |
| **2CDX120/40** | 2CDXM120/40 | 12.5 | 8 | 9 | – | PG13.5 | G1¼ |
| **2CDX200** | | | | | | | |
| **2CDX200/30** | 2CDXM200/30 | 12.5 | 8 | 9 | – | PG13.5 | G1½ |
| **2CDX200/40** | 2CDXM200/40 | 12.5 | 8 | 9 | – | PG13.5 | G1½ |
| **2CDX200/50** | – | 16 | 13 | 12 | – | PG16 | G1½ |