CDX SERIES

CDX

CDX70 / 90 / 120 / 200

Stainless steel horizontal single-stage centrifugal pump



RANGE

Rated power	**0.37–2.2 kW**
Capacity Q	**1.2–15 m³/h**
Total head H	**12.5–38 m**
Motor	**2-pole, 50 Hz**
Voltage 1~	**220–240 V**
Voltage 3~	**380–415 V**

MODEL DESIGNATION

- CDX… three-phase, 3~ 380–415 V
- CDXM… single-phase, 1~ 220–240 V

PRODUCT OVERVIEW

50 Hz | 2-pole motor

Redpump
Italy Standard

DESCRIPTION


Single-impeller centrifugal pumps with hydraulic components made of AISI 304 stainless steel, suitable for pressure boosting, water supply, water treatment and irrigation, air conditioning systems and general water pumping, including moderately aggressive liquids. Performance data according to ISO 9906, Annex A.

FEATURES

- Single-stage centrifugal pump with axial suction and radial discharge
- Compact design: the pump is directly coupled to the motor on the same axis
- Easy installation: threaded inlet and outlet
- Lightweight: main parts and components are pressed from thin sheet metal

CONSTRUCTION

EXPLODED VIEW · CDX70 / 90 / 120 / 200

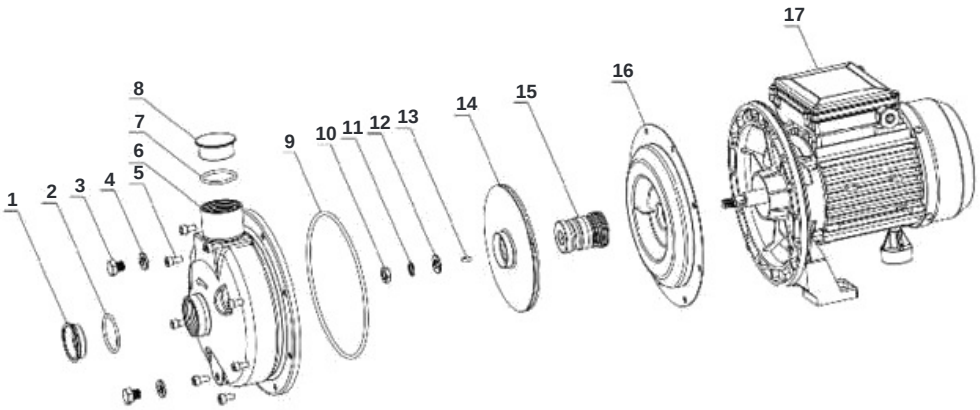

No.	PART
1	Dust cap
2	O-ring
3	Plug
4	Washer
5	Hexagon socket bolt
6	Pump casing assembly
7	O-ring
8	Dust cap
9	O-ring

No.	PART
10	Hexagon nut
11	Spring washer
12	Washer
13	Key
14	Impeller
15	Mechanical seal
16	Pump cover
17	Motor

MATERIALS

- Pump body, impeller, diffuser and casing cover in AISI 304
- Shaft in AISI 303
- Bracket and motor casing in aluminium
- Mechanical seal in carbon/ceramic/NBR

CDX SERIES

CDX

CDX70 / 90 / 120 / 200

Stainless steel horizontal single-stage centrifugal pump



KEY DATA


Rated power	**0.37–2.2 kW**
Capacity Q	**1.2–15 m³/h**
Total head H	**12.5–38 m**
Motor	**2-pole, 50 Hz**
Voltage 1~	**220–240 V**
Voltage 3~	**380–415 V**
Insulation class	**F**
Protection	**IP55**
Suction DNA	**G1¼ · CDX200: G1½**
Discharge DNM	**1"**

OPERATING CONDITIONS

- Maximum working pressure: 8 bar
- Maximum liquid temperature: 35 °C according to EN 60335-2-41 for domestic use
- 60 °C for other uses of CDX70/05, CDX70/07, CDX90/10
- 90 °C for other models

PERFORMANCE & TECHNICAL DATA

50 Hz | 2-pole motor

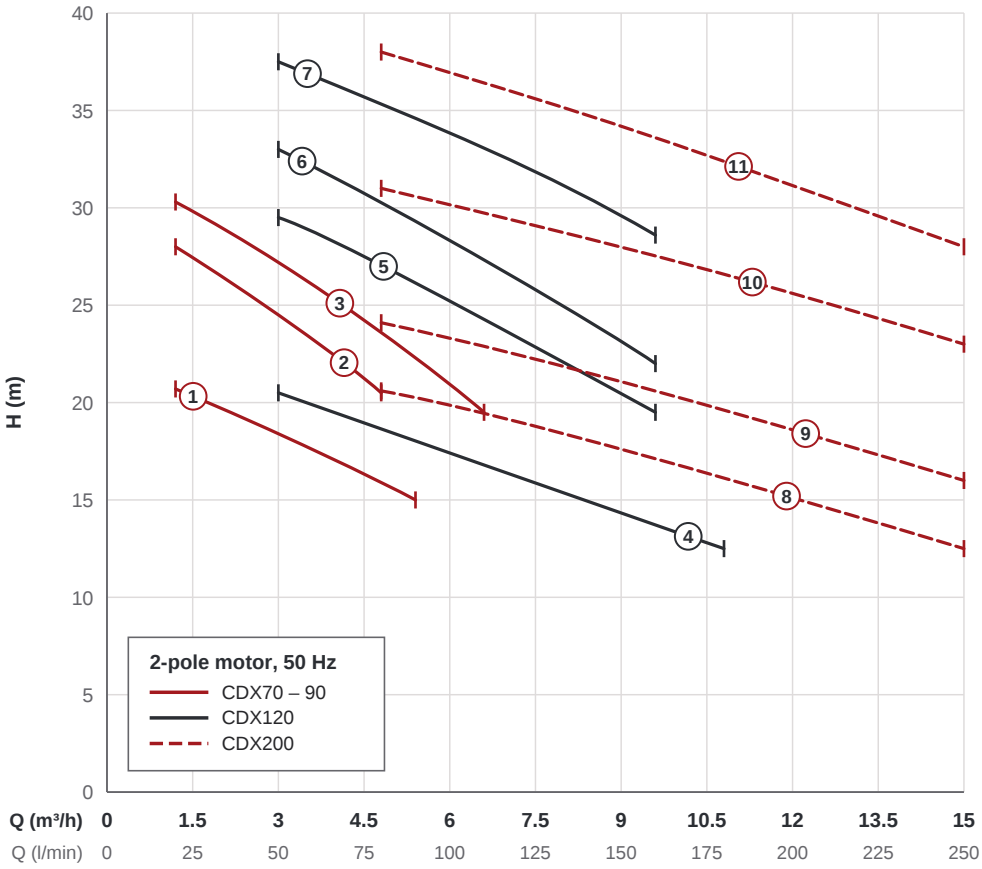

PERFORMANCE DATA

No.	MODEL 3~ 380–415 V	MODEL 1~ 220–240 V	P_2 kW	I (A) 1~	I (A) 3~	CAPACITY Q / TOTAL HEAD H (m) m³/h / l/min	1.2 20	3 50	4.8 80	5.4 90	6.6 110	7.8 130	9.6 160	10.8 180	12.6 210	15 250
CDX70 – 90																
1	**CDX70/05**	CDXM70/05	0.37	3.1	1.4		20.7	18.4	15.9	15	–	–	–	–	–	–
2	**CDX70/07**	CDXM70/07	0.55	4.6	2.0		28	24.5	20.5	–	–	–	–	–	–	–
3	**CDX90/10**	CDXM90/10	0.75	5.6	2.3		30.3	27.2	23.6	22.3	19.5	–	–	–	–	–
CDX120																
4	**CDX120/07**	CDXM120/07	0.55	4.6	1.9		–	20.5	18.7	18.1	16.8	15.5	13.7	12.5	–	–
5	**CDX120/12**	CDXM120/12	0.9	6.9	3.0		–	29.5	27.1	26.1	24.3	22.4	19.5	–	–	–
6	**CDX120/15**	CDXM120/15	1.1	7.7	3.2		–	33	30.3	29.3	27.3	25.3	22	–	–	–
7	**CDX120/20**	CDXM120/20	1.5	9.3	4.0		–	37.5	35.3	34.6	33.1	31.4	28.6	–	–	–
CDX200																
8	**CDX200/12**	CDXM200/12	0.9	6.3	2.7		–	–	20.6	20.2	19.5	18.5	17.1	16.1	14.6	12.5
9	**CDX200/15**	CDXM200/15	1.1	7.7	3.2		–	–	24.1	23.7	22.9	22	20.6	19.6	18.1	16
10	**CDX200/20**	CDXM200/20	1.5	10.7	4.0		–	–	31	30.6	29.7	28.9	27.5	26.6	25.1	23
11	**CDX200/25**	CDXM200/25	2.2	11.8	4.8		–	–	38	37.5	36.4	35.3	33.6	32.4	30.5	28

MOTOR

- T.E.F.C. 2-pole motor
- Permanent split capacitor and automatic thermal overload protection for single-phase version
- Thermal protection to be provided by the user for three-phase version

APPLICATIONS

- Pressure boosting
- Water supply
- Water treatment and irrigation
- Air conditioning systems
- General water pumping, including moderately aggressive liquids

CDX SERIES

CDX

CDX70 / 90 / 120 / 200


Stainless steel horizontal single-stage centrifugal pump

DIMENSIONS

- Dimensions in mm
- B: single-phase 1~ / three-phase 3~ version
- Suction DNA: G1¼, CDX200: G1½
- Discharge DNM: 1"
- Fixing holes: 2–ø9
- T = cable gland

DIMENSIONS

50 Hz | 2-pole motor

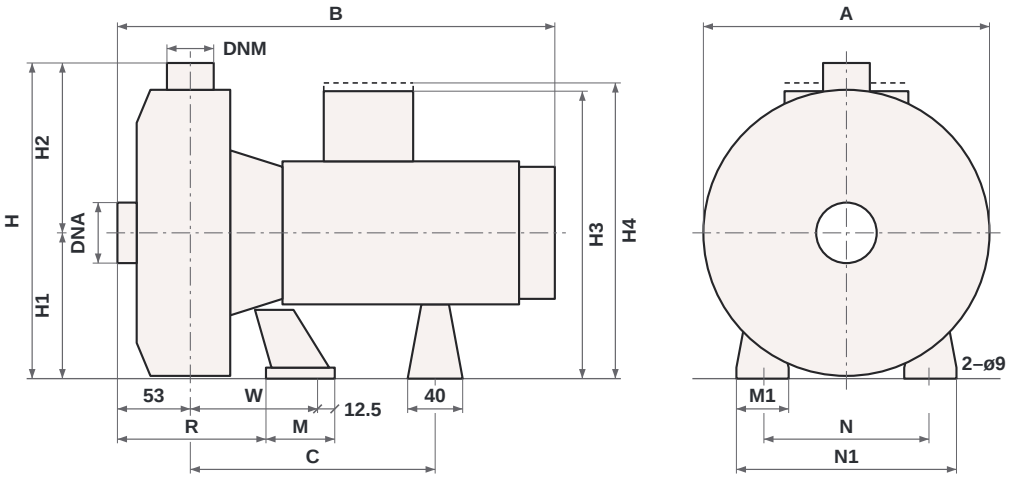

DIMENSIONS

MODEL		DIMENSIONS (mm)														
3~	1~	A	B 1~	B 3~	C	H	H1	H2	H3	H4	M	M1	N	N1	R	W
CDX70 – 90																
CDX70/05	CDXM70/05	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX70/07	CDXM70/07	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX90/10	CDXM90/10	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX120																
CDX120/07	CDXM120/07	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX120/12	CDXM120/12	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX120/15	CDXM120/15	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX120/20	CDXM120/20	232	345	345	199	250	118	132	235	253	55	40	140	180	105.5	95
CDX200																
CDX200/12	CDXM200/12	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX200/15	CDXM200/15	208	318	318	178	229.5	106	123.5	209	215	50	38	120	160	108	92.5
CDX200/20	CDXM200/20	208	345	345	199	229.5	106	123.5	223	240	55	40	140	180	105.5	95
CDX200/25	CDXM200/25	232	345	345	199	250	118	132	235	–	55	40	140	180	105.5	95

CABLE GLAND, PORT

MODEL		T	DNA
3~	1~		
CDX70 – 90			
CDX70/05	CDXM70/05	PG11	G1¼
CDX70/07	CDXM70/07	PG11	G1¼
CDX90/10	CDXM90/10	PG11	G1¼
CDX120			
CDX120/07	CDXM120/07	PG11	G1¼
CDX120/12	CDXM120/12	PG13.5	G1¼
CDX120/15	CDXM120/15	PG13.5	G1¼
CDX120/20	CDXM120/20	PG13.5	G1¼
CDX200			
CDX200/12	CDXM200/12	PG13.5	G1½
CDX200/15	CDXM200/15	PG13.5	G1½
CDX200/20	CDXM200/20	PG13.5	G1½
CDX200/25	CDXM200/25	–	G1½