MHI SERIES

MHI

MHI / IVT-MHI

Horizontal multi-stage stainless steel pump



KEY DATA

Rated power	**0.37–2.2 kW**
Max. flow	**4–26 m³/h**
Max. head	**23–69 m**
Fluid temperature	**0–90 °C**
Max. suction lift	**8 m**
Max. pressure	**10 bar**
Protection class	**IP54**
Voltage 1~	**220–240 V**
Voltage 3~	**380–415 V**

FEATURES

- Stainless steel materials
- High pressure from multi-stage impellers

PRODUCT OVERVIEW

50 Hz





IVT-MHI Multi-stage pump with frequency inverter

APPLICATION SCOPE

- Water supply and pressure boosting
- Hot water circulation and heating systems
- Air-conditioning systems
- Industrial circulation systems
- Washing and sprinkler systems
- Various machinery

OPERATING DATA

Approved fluids	Clean water
Fluid temperature	0–90 °C
Max. suction lift	8 m
Max. pressure	10 bar
Protection class	IP54
Power supply	1~ 220–240 V / 3~ 380–415 V, 50 Hz

MATERIALS

Casing	AISI 304 stainless steel
Impeller	AISI 304 stainless steel
Shaft	AISI 304 stainless steel
Mechanical seal	Silicon carbide and US Morgan graphite, resistant to temperatures of 120 °C and to antifreeze corrosion
Bearing	High-speed low-noise bearings with customised high-temperature grease (−50 to 200 °C)
Motor	National-standard silicon steel stator and rotor laminations, class F heat-resistant insulated copper wire

MHI SERIES

MHI

MHI / IVT-MHI

Horizontal multi-stage stainless steel pump

ELECTRICAL DATA

Voltage 1~	**220–240 V**
Voltage 3~	**380–415 V**
Frequency	**50 Hz**
Protection class	**IP54**

OPERATING LIMITS

Max. pressure	**10 bar**
Fluid temperature	**0–90 °C**
Max. suction lift	**8 m**
Approved fluids	**Clean water**


READING THE CURVES


- Curve label = model number
- Circle = rated point
- m³/h × 16.667 = l/min


PERFORMANCE & TECHNICAL DATA


50 Hz

Redpump
Italy Standard

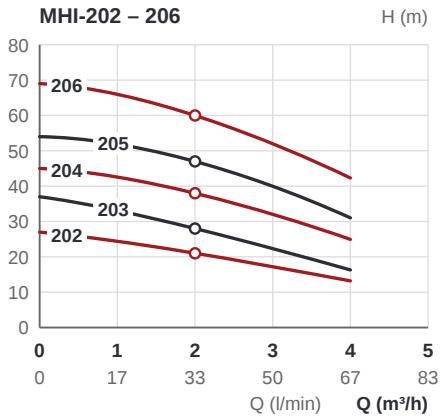

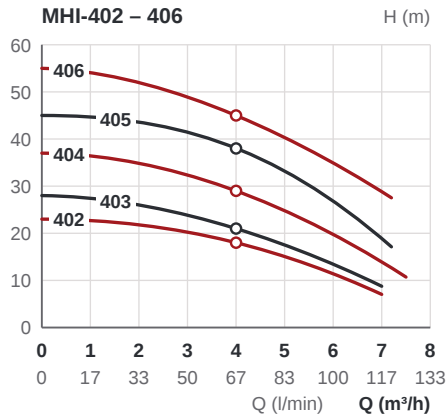

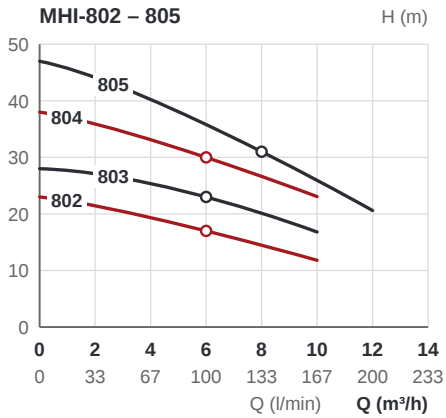

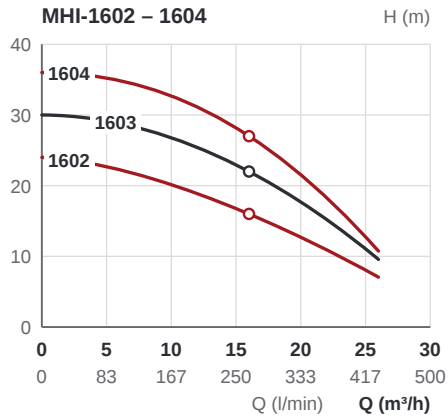

TECHNICAL DATA

MODEL	POWER kW	MAX. HEAD m	RATED HEAD m	MAX. FLOW m³/h	RATED FLOW m³/h	INLET DN	OUTLET DN
MHI-202 – 206							
MHI-202	0.37	27	21	4	2	25	25
MHI-203	0.55	37	28	4	2	25	25
MHI-204	0.55	45	38	4	2	25	25
MHI-205	0.75	54	47	4	2	25	25
MHI-206	1.1	69	60	4	2	25	25
MHI-402 – 406							
MHI-402	0.37	23	18	7	4	32	25
MHI-403	0.55	28	21	7	4	32	25
MHI-404	0.75	37	29	7.5	4	32	25
MHI-405	1.1	45	38	7.2	4	32	25
MHI-406	1.5	55	45	7.2	4	32	25
MHI-802 – 805							
MHI-802	0.75	23	17	10	6	40	32
MHI-803	1.1	28	23	10	6	40	32
MHI-804	1.5	38	30	10	6	40	32
MHI-805	2.2	47	31	12	8	40	32
MHI-1602 – 1604							
MHI-1602	1.5	24	16	26	16	50	40
MHI-1603	1.85	30	22	26	16	50	40
MHI-1604	2.2	36	27	26	16	50	40

MHI

MHI / IVT-MHI

Horizontal multi-stage stainless steel pump




IVT-MHI

- Multi-stage pump with frequency inverter
- Dimensions in mm
- Dn1 = discharge port (DN)
- Dn2 = suction port (DN)
- Pressure setting in bar

IVT-MHI PUMP SETS

50 Hz

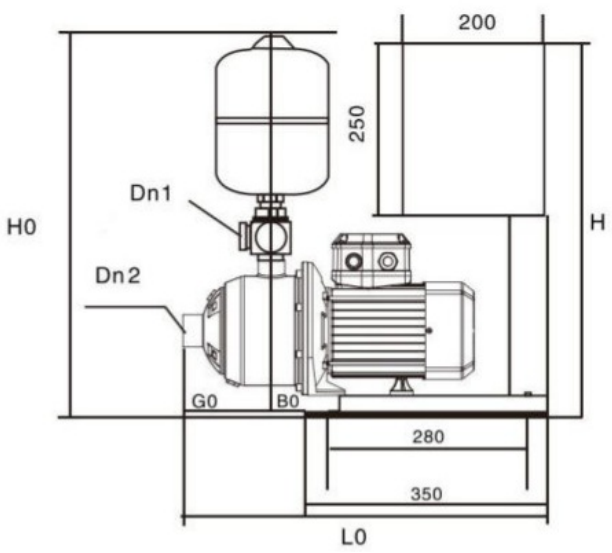

DIMENSIONS & PRESSURE SETTING

MODEL	Dn1 DN	Dn2 DN	E0 mm	E1 mm	G0 mm	B0 mm	L0 mm	H0 mm	H mm	W mm	PRESSURE SETTING, bar
IVT-MHI202 – 203											
IVT-MHI202	25	25	120	138	110	80	505	541	540	180	1.6
IVT-MHI203	25	25	120	138	110	80	505	541	540	180	2.4
IVT-MHI402 – 406											
IVT-MHI402	25	32	120	138	110	80	505	541	540	180	1.6
IVT-MHI403	25	32	120	138	110	80	505	541	540	180	2.4
IVT-MHI404	25	32	120	138	158	80	553	541	540	180	3.0
IVT-MHI405	25	32	120	138	158	80	553	541	540	180	4.0
IVT-MHI406	25	32	130	138	182	80	577	551	540	180	5.0
IVT-MHI802 – 805											
IVT-MHI802	32	40	120	144	122	80	517	552	540	180	1.6
IVT-MHI803	32	40	120	144	122	80	517	552	540	180	2.4
IVT-MHI804	32	40	130	144	182	80	517	562	540	180	3.0
IVT-MHI805	32	40	130	144	182	80	517	562	540	180	4.0
IVT-MHI1602 – 1604											
IVT-MHI1602	40	50	120	154	138	84	537	562	540	180	1.6
IVT-MHI1603	40	50	120	154	138	84	537	562	540	180	2.4
IVT-MHI1604	40	50	130	154	183	84	582	572	590	210	3.0