IRG SERIES

IRG

Single-suction centrifugal pump



RANGE CHARACTERISTICS

DN	**25 – 350 mm**
Power	**0.55 – 250 kW**
Rated flow	**3.7 – 1200 m³/h**
Rated head	**5 – 150 m**
Speed	**n ≈ 2900 /min · n ≈ 1450 /min**
Frequency	**50 Hz**
Single-phase	**1~ 220–240 V, up to 3 kW**
Three-phase	**3~ 380–415 V**

MODEL CODE

Example: **IRG80-315/11-4**


IRG	Pump series
80	Discharge size (mm)
315	Nominal impeller size (mm)
11	Motor power (kW)
-4	4-pole motor (n ≈ 1450 /min)
Blank	2-pole motor (n ≈ 2900 /min)

PRODUCT OVERVIEW

50 Hz | n ≈ 2900 /min · n ≈ 1450 /min

Redpump
Italy Standard

CONSTRUCTION & MATERIALS

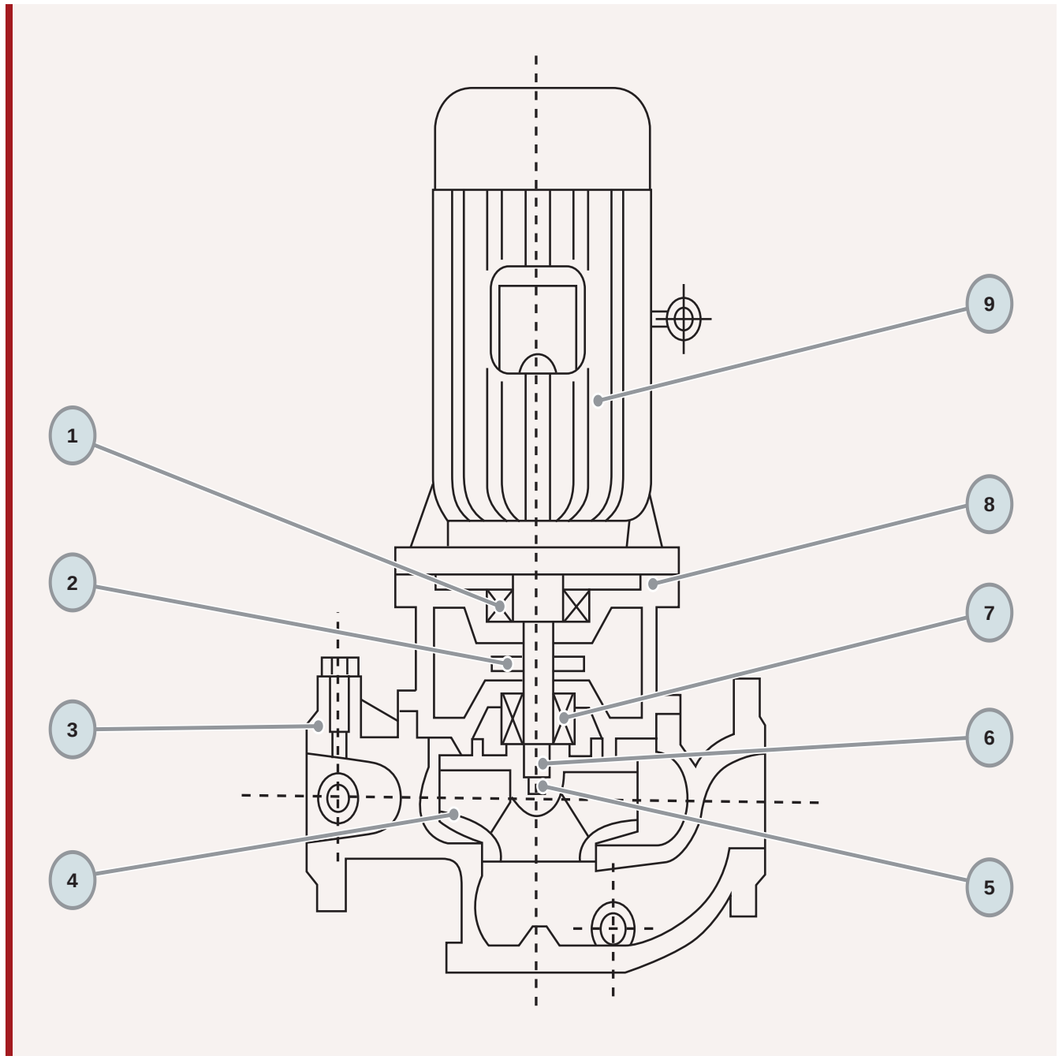

No.	DESCRIPTION	MATERIAL
1	**Bearing**	Ball Bearing
2	**Water Deflector**	Rubber
3	**Pump Casing**	Cast iron
4	**Impeller**	SS304/Cast iron
5	**Impeller Nut**	Galvanized Steel
6	**Shaft**	SS304-45# Steel
7	**Mechanical Seal**	SiC/Carbon/SS304
8	**Connection**	Cast iron
9	**Motor**	IP55 Class F

APPLICATIONS

- Clean water
- Home
- Civil
- Industry

FEATURES

- Complete range with a full series of centrifugal pumps
- Vertical and horizontal designs, suitable for any installation
- Available with explosion-proof motors
- Wide range of pumps suitable for many applications
- Pump casing with anti-corrosion coating
- Quality bearings, wear-resistant mechanical seal

2-POLE

n ≈ 2900 /min · 50 Hz



2-POLE RANGE

DN	**25 – 150 mm**
Power	**0.75 – 110 kW**
Rated flow	**3.7 – 200 m³/h**
Rated head	**10 – 150 m**

ON THIS PAGE

DN 25 · 32 · 40 · 50
DN 65 · 80

POWER SUPPLY

1~ 220–240 V
models up to 3 kW

3~ 380–415 V
all models

50 Hz

PERFORMANCE DATA · 2-POLE MOTORS

50 Hz | n ≈ 2900 /min | part 1 of 2

Redpump
Italy Standard

PERFORMANCE DATA

■ available 1~ 220–240 V (models up to 3 kW) 3~ 380–415 V

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 25	DN 25×25 mm							
IRG25-125/0.75	0.75	1	4	67	**20**	25×25	■	■
IRG25-160/1.5	1.5	2	4	67	**32**	25×25	■	■
IRG25-160/1.1	1.1	1.5	3.7	62	**28**	25×25	■	■
IRG 32	DN 32×32 mm							
IRG32-125/0.75	0.75	1	5	83	**20**	32×32	■	■
IRG32-160/1.5	1.5	2	4.5	75	**32**	32×32	■	■
IRG32-160/1.1	1.1	1.5	4	67	**28**	32×32	■	■
IRG32-200/3	3	4	4.5	75	**50**	32×32	■	■
IRG32-200/2.2	2.2	3	4	67	**44**	32×32	■	■
IRG 40	DN 40×40 mm							
IRG40-100/1.1	1.1	1.5	12.5	208	**12.5**	40×40	■	■
IRG40-100/0.75	0.75	1	11	183	**10**	40×40	■	■
IRG40-125/1.5	1.5	2	12.5	208	**20**	40×40	■	■
IRG40-125/1.1	1.1	1.5	11	183	**16**	40×40	■	■
IRG40-160/3	3	4	12.5	208	**32**	40×40	■	■
IRG40-160/2.2	2.2	3	11.7	195	**28**	40×40	■	■
IRG40-200/5.5	5.5	7.5	12.5	208	**50**	40×40	–	■
IRG40-200/4	4	5.5	11.7	195	**44**	40×40	–	■
IRG40-200/3	3	4	10.6	177	**36**	40×40	■	■
IRG40-250/11	11	15	12.5	208	**80**	40×40	–	■
IRG40-250/7.5	7.5	10	11.6	193	**70**	40×40	–	■
IRG 50	DN 50×50 mm							
IRG50-100/1.5	1.5	2	25	417	**12.5**	50×50	■	■
IRG50-100/1.1	1.1	1.5	22.3	372	**10**	50×50	■	■
IRG50-125/3	3	4	25	417	**20**	50×50	■	■
IRG50-125/2.2	2.2	3	22.3	372	**16**	50×50	■	■
IRG50-160/4	4	5.5	25	417	**32**	50×50	–	■

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 50	DN 50×50 mm	(continued)						
IRG50-160/3	3	4	21.6	360	**24**	50×50	■	■
IRG50-200/7.5	7.5	10	25	417	**50**	50×50	–	■
IRG50-200/5.5	5.5	7.5	21.8	363	**38**	50×50	–	■
IRG50-250/15	15	20	25	417	**80**	50×50	–	■
IRG50-250/11	11	15	23.4	390	**70**	50×50	–	■
IRG50-315/30	30	40	25	417	**125**	50×50	–	■
IRG50-315/22	22	30	23.7	395	**113**	50×50	–	■
IRG50-315/18.5	18.5	25	22.5	375	**101**	50×50	–	■
IRG 65	DN 65×65 mm							
IRG65-100/3	3	4	50	833	**12.5**	65×65	■	■
IRG65-100/2.2	2.2	3	44.7	745	**10**	65×65	■	■
IRG65-125/5.5	5.5	7.5	50	833	**20**	65×65	–	■
IRG65-125/4	4	5.5	45	750	**16**	65×65	–	■
IRG65-160/7.5	7.5	10	50	833	**32**	65×65	–	■
IRG65-160/5.5	5.5	7.5	43.4	723	**24**	65×65	–	■
IRG65-200/15	15	20	50	833	**50**	65×65	–	■
IRG65-200/11	11	15	47	783	**44**	65×65	–	■
IRG65-200/7.5	7.5	10	43.3	722	**38**	65×65	–	■
IRG65-250/22	22	30	50	833	**80**	65×65	–	■
IRG65-250/18.5	18.5	25	46.7	778	**70**	65×65	–	■
IRG65-250/15	15	20	43.3	722	**60**	65×65	–	■
IRG65-315/37	37	50	50	833	**125**	65×65	–	■
IRG65-315/30	30	40	46.5	775	**110**	65×65	–	■
IRG 80	DN 80×80 mm							
IRG80-100/5.5	5.5	7.5	100	1667	**12.5**	80×80	–	■
IRG80-100/4	4	5.5	89	1483	**10**	80×80	–	■
IRG80-125/11	11	15	100	1667	**20**	80×80	–	■

MODEL CODE

IRG80-315/11-4

IRG	Pump series	**80**	Discharge size (mm)	**315**	Nominal impeller size (mm)
11	Motor power (kW)	**-4**	4-pole motor (n ≈ 1450 /min)	**Blank**	2-pole motor (n ≈ 2900 /min)

2-POLE

n ≈ 2900 /min · 50 Hz



2-POLE RANGE

DN	**25 – 150 mm**
Power	**0.75 – 110 kW**
Rated flow	**3.7 – 200 m³/h**
Rated head	**10 – 150 m**

ON THIS PAGE

DN 80 · 100 · 125 · 150

POWER SUPPLY

1~ 220–240 V
models up to 3 kW

3~ 380–415 V
all models

50 Hz

PERFORMANCE DATA · 2-POLE MOTORS

50 Hz | n ≈ 2900 /min | part 2 of 2

Redpump
Italy Standard

PERFORMANCE DATA

■ available 1~ 220–240 V (models up to 3 kW) 3~ 380–415 V

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 80	DN 80×80 mm (continued)							
IRG80-125/7.5	7.5	10	89	1483	**16**	80×80	–	■
IRG80-160/15	15	20	100	1667	**32**	80×80	–	■
IRG80-160/11	11	15	93.5	1558	**28**	80×80	–	■
IRG80-200/22	22	30	100	1667	**50**	80×80	–	■
IRG80-200/18.5	18.5	25	93.5	1558	**44**	80×80	–	■
IRG80-200/15	15	20	87	1450	**38**	80×80	–	■
IRG80-250/37	37	50	100	1667	**80**	80×80	–	■
IRG80-250/30	30	40	93.5	1558	**70**	80×80	–	■
IRG80-315/75	75	100	100	1667	**125**	80×80	–	■
IRG80-315/55	55	75	95	1583	**113**	80×80	–	■
IRG80-315/45	45	60	90	1500	**101**	80×80	–	■
IRG80-315/37	37	50	82	1367	**85**	80×80	–	■
IRG 100	DN 100×100 mm							
IRG100-100/11	11	15	160	2667	**12.5**	100×100	–	■
IRG100-125/15	15	20	160	2667	**20**	100×100	–	■
IRG100-125/11	11	15	140	2333	**17**	100×100	–	■
IRG100-160/22	22	30	160	2667	**32**	100×100	–	■
IRG100-160/18.5	18.5	25	140	2333	**28**	100×100	–	■
IRG100-200/37	37	50	160	2667	**50**	100×100	–	■
IRG100-200/30	30	40	140	2333	**45**	100×100	–	■
IRG100-200/22	22	30	100	1667	**40**	100×100	–	■
IRG100-250/55	55	75	160	2667	**80**	100×100	–	■
IRG100-250/45	45	60	140	2333	**72**	100×100	–	■
IRG100-250/37	37	50	100	1667	**65**	100×100	–	■
IRG 125	DN 125×125 mm							
IRG125-100/11	11	15	160	2667	**12.5**	125×125	–	■
IRG125-100/7.5	7.5	10	143	2383	**10**	125×125	–	■

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 125	DN 125×125 mm (continued)							
IRG125-125/15	15	20	160	2667	**20**	125×125	–	■
IRG125-125/11	11	15	143	2383	**16**	125×125	–	■
IRG125-160/22	22	30	160	2667	**32**	125×125	–	■
IRG125-160/18.5	18.5	25	150	2500	**28**	125×125	–	■
IRG125-160/15	15	20	138	2300	**24**	125×125	–	■
IRG125-200/37	37	50	160	2667	**50**	125×125	–	■
IRG125-200/30	30	40	150	2500	**44**	125×125	–	■
IRG125-200/22	22	30	138	2300	**37.5**	125×125	–	■
IRG125-250/55	55	75	160	2667	**80**	125×125	–	■
IRG125-250/45	45	60	150	2500	**70**	125×125	–	■
IRG125-250/37	37	50	138	2300	**60**	125×125	–	■
IRG125-315/90	90	120	160	2667	**125**	125×125	–	■
IRG125-315/75	75	100	150	2500	**110**	125×125	–	■
IRG125-315/55	55	75	134	2233	**88**	125×125	–	■
IRG125-350/110	110	150	160	2667	**150**	125×125	–	■
IRG125-350/90	90	120	150	2500	**142**	125×125	–	■
IRG125-350/75	75	100	143	2383	**135**	125×125	–	■
IRG 150	DN 150×150 mm							
IRG150-250/75	75	100	200	3333	**80**	150×150	–	■
IRG150-250/55	55	75	187	3117	**70**	150×150	–	■
IRG150-250/45	45	60	173	2883	**60**	150×150	–	■
IRG150-315/110	110	150	200	3333	**125**	150×150	–	■
IRG150-315/90	90	120	187	3117	**110**	150×150	–	■
IRG150-315/75	75	100	173	2883	**95**	150×150	–	■

MODEL CODE

IRG80-315/11-4

IRG	Pump series	**80**	Discharge size (mm)	**315**	Nominal impeller size (mm)
11	Motor power (kW)	**-4**	4-pole motor (n ≈ 1450 /min)	**Blank**	2-pole motor (n ≈ 2900 /min)

4-POLE

n ≈ 1450 /min · 50 Hz



4-POLE RANGE

DN	**40 – 350 mm**
Power	**0.55 – 250 kW**
Rated flow	**5.8 – 1200 m³/h**
Rated head	**5 – 80 m**

ON THIS PAGE

DN 40 · 50 · 65 · 80
DN 100 · 125

POWER SUPPLY

1~ 220–240 V
models up to 3 kW

3~ 380–415 V
all models

50 Hz

PERFORMANCE DATA · 4-POLE MOTORS

50 Hz | n ≈ 1450 /min | part 1 of 2

Redpump
Italy Standard

PERFORMANCE DATA

■ available 1~ 220–240 V (models up to 3 kW) 3~ 380–415 V

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 40	DN 40×40 mm							
IRG40-125/0.55-4	0.55	0.75	6.3	105	**5**	40×40	■	■
IRG40-160/0.55-4	0.55	0.75	6.3	105	**8**	40×40	■	■
IRG40-200/0.75-4	0.75	1	6.3	105	**12.5**	40×40	■	■
IRG40-200/0.55-4	0.55	0.75	5.8	97	**11**	40×40	■	■
IRG40-250/1.5-4	1.5	2	6.3	105	**20**	40×40	■	■
IRG40-250/1.1-4	1.1	1.5	5.8	97	**17**	40×40	■	■
IRG 50	DN 50×50 mm							
IRG50-125/0.55-4	0.55	0.75	12.5	208	**5**	50×50	■	■
IRG50-160/0.55-4	0.55	0.75	12.5	208	**8**	50×50	■	■
IRG50-200/1.1-4	1.1	1.5	12.5	208	**12.5**	50×50	■	■
IRG50-200/0.75-4	0.75	1	11.2	187	**10**	50×50	■	■
IRG50-250/2.2-4	2.2	3	12.5	208	**20**	50×50	■	■
IRG50-250/1.5-4	1.5	2	11.7	195	**17.5**	50×50	■	■
IRG50-250/1.1-4	1.1	1.5	10	167	**13**	50×50	■	■
IRG50-315/4-4	4	5.5	12.5	208	**32**	50×50	–	■
IRG50-315/3-4	3	4	11.7	195	**28**	50×50	■	■
IRG 65	DN 65×65 mm							
IRG65-125/0.75-4	0.75	1	25	417	**5**	65×65	■	■
IRG65-160/1.1-4	1.1	1.5	25	417	**8**	65×65	■	■
IRG65-160/0.75-4	0.75	1	22	367	**6**	65×65	■	■
IRG65-200/2.2-4	2.2	3	25	417	**12.5**	65×65	■	■
IRG65-200/1.5-4	1.5	2	23.3	388	**11**	65×65	■	■
IRG65-250/3-4	3	4	25	417	**20**	65×65	■	■
IRG65-250/2.2-4	2.2	3	20	333	**12.8**	65×65	■	■
IRG65-315/5.5-4	5.5	7.5	25	417	**32**	65×65	–	■
IRG65-315/4-4	4	5.5	22.5	375	**26**	65×65	–	■
IRG 80	DN 80×80 mm							
IRG80-125/1.5-4	1.5	2	50	833	**5**	80×80	■	■
IRG80-160/2.2-4	2.2	3	50	833	**8**	80×80	■	■
IRG80-160/1.5-4	1.5	2	44.7	745	**6**	80×80	■	■

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 80	DN 80×80 mm (continued)							
IRG80-200/3-4	3	4	50	833	**12.5**	80×80	■	■
IRG80-250/5.5-4	5.5	7.5	50	833	**20**	80×80	–	■
IRG80-250/4-4	4	5.5	46	767	**17**	80×80	–	■
IRG80-250/3-4	3	4	40.5	675	**13**	80×80	■	■
IRG80-315/11-4	11	15	50	833	**32**	80×80	–	■
IRG80-315/7.5-4	7.5	10	46	767	**27.9**	80×80	–	■
IRG80-315/5.5-4	5.5	7.5	40.5	675	**21**	80×80	–	■
IRG 100	DN 100×100 mm							
IRG100-125/2.2-4	2.2	3	80	1333	**5**	100×100	■	■
IRG100-160/4-4	4	5.5	80	1333	**8**	100×100	–	■
IRG100-160/3-4	3	4	72	1200	**6**	100×100	■	■
IRG100-200/5.5-4	5.5	7.5	80	1333	**12.5**	100×100	–	■
IRG100-200/4-4	4	5.5	72	1200	**10**	100×100	–	■
IRG100-250/11-4	11	15	100	1667	**20**	100×100	–	■
IRG100-250/7.5-4	7.5	10	93.3	1555	**17.4**	100×100	–	■
IRG100-250/5.5-4	5.5	7.5	69	1150	**15**	100×100	–	■
IRG100-315/15-4	15	20	80	1333	**32**	100×100	–	■
IRG100-315/11-4	11	15	75	1250	**27.5**	100×100	–	■
IRG100-315/7.5-4	7.5	10	72	1200	**24**	100×100	–	■
IRG100-400/30-4	30	40	80	1333	**44**	100×100	–	■
IRG100-400/22-4	22	30	75	1250	**44**	100×100	–	■
IRG100-400/18.5-4	18.5	25	70	1167	**38**	100×100	–	■
IRG 125	DN 125×125 mm							
IRG125-200/11-4	11	15	200	3333	**12.5**	125×125	–	■
IRG125-200/7.5-4	7.5	10	179	2983	**10**	125×125	–	■
IRG125-250/15-4	15	20	200	3333	**20**	125×125	–	■
IRG125-250/11-4	11	15	184.4	3073	**17**	125×125	–	■
IRG125-250/7.5-4	7.5	10	167	2783	**14**	125×125	–	■
IRG125-315/22-4	22	30	200	3333	**32**	125×125	–	■
IRG125-315/18.5-4	18.5	25	187	3117	**28**	125×125	–	■

MODEL CODE

IRG80-315/11-4

IRG	Pump series	**80**	Discharge size (mm)	**315**	Nominal impeller size (mm)
11	Motor power (kW)	**-4**	4-pole motor (n ≈ 1450 /min)	**Blank**	2-pole motor (n ≈ 2900 /min)

IRG SERIES

4-POLE

n ≈ 1450 /min · 50 Hz



4-POLE RANGE

DN	**40 – 350 mm**
Power	**0.55 – 250 kW**
Rated flow	**5.8 – 1200 m³/h**
Rated head	**5 – 80 m**

ON THIS PAGE

DN 125 · 150 · 200 · 250
DN 300 · 350

POWER SUPPLY

1~ 220–240 V
models up to 3 kW

3~ 380–415 V
all models

50 Hz

PERFORMANCE DATA · 4-POLE MOTORS

50 Hz | n ≈ 1450 /min | part 2 of 2

Redpump
Italy Standard

PERFORMANCE DATA

■ available 1~ 220–240 V (models up to 3 kW) 3~ 380–415 V

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 125	DN 125×125 mm (continued)							
IRG125-315/15-4	15	20	173	2883	**24**	125×125	–	■
IRG125-400/45-4	45	60	200	3333	**50**	125×125	–	■
IRG125-400/37-4	37	50	187	3117	**44**	125×125	–	■
IRG125-400/30-4	30	40	160	2667	**38**	125×125	–	■
IRG 150	DN 150×150 mm							
IRG150-200/15-4	15	20	200	3333	**12.5**	150×150	–	■
IRG150-200/11-4	11	15	179	2983	**10**	150×150	–	■
IRG150-250/18.5-4	18.5	25	200	3333	**20**	150×150	–	■
IRG150-250/15-4	15	20	187	3117	**17.5**	150×150	–	■
IRG150-250/11-4	11	15	173	2883	**14**	150×150	–	■
IRG150-315/30-4	30	40	200	3333	**32**	150×150	–	■
IRG150-315/22-4	22	30	187	3117	**28**	150×150	–	■
IRG150-315/18.5-4	18.5	25	173	2883	**24**	150×150	–	■
IRG150-400/45-4	45	60	200	3333	**50**	150×150	–	■
IRG150-400/37-4	37	50	187	3117	**44**	150×150	–	■
IRG150-400/30-4	30	40	173	2883	**37.5**	150×150	–	■
IRG150-400/22-4	22	30	160	2667	**32**	150×150	–	■
IRG 200	DN 200×200 mm							
IRG200-200/22-4	22	30	400	6667	**12.5**	200×200	–	■
IRG200-200/18.5-4	18.5	25	358	5967	**10**	200×200	–	■
IRG200-250/30-4	30	40	400	6667	**20**	200×200	–	■
IRG200-250/22-4	22	30	358	5967	**16**	200×200	–	■
IRG200-250/18.5-4	18.5	25	322	5367	**13**	200×200	–	■
IRG200-315/55-4	55	75	400	6667	**32**	200×200	–	■
IRG200-315/45-4	45	60	374	6233	**28**	200×200	–	■
IRG200-315/37-4	37	50	346	5767	**24**	200×200	–	■
IRG200-400/75-4	75	100	400	6667	**50**	200×200	–	■
IRG200-400/55-4	55	75	346	5767	**38**	200×200	–	■
IRG200-400/45-4	45	60	320	5333	**32**	200×200	–	■

MODEL	P_2 kW	P_2 HP	Q m³/h	Q l/min	H m	DN mm	1~	3~
IRG 250	DN 250×250 mm							
IRG250-250/45-4	45	60	550	9167	**20**	250×250	–	■
IRG250-250/37-4	37	50	500	8333	**17**	250×250	–	■
IRG250-315/75-4	75	100	550	9167	**32**	250×250	–	■
IRG250-315/55-4	55	75	500	8333	**28**	250×250	–	■
IRG250-315/45-4	45	60	450	7500	**24**	250×250	–	■
IRG250-400/110-4	110	150	500	8333	**50**	250×250	–	■
IRG250-400/90-4	90	120	500	8333	**44**	250×250	–	■
IRG250-400/75-4	75	100	450	7500	**38**	250×250	–	■
IRG250-500/200-4	200	270	550	9167	**80**	250×250	–	■
IRG250-500/160-4	160	215	506	8433	**71**	250×250	–	■
IRG250-500/132-4	132	176	466	7767	**63.5**	250×250	–	■
IRG 300	DN 300×300 mm							
IRG300-250/55-4	55	75	720	12000	**20**	300×300	–	■
IRG300-250/45-4	45	60	600	10000	**17**	300×300	–	■
IRG300-315/90-4	90	120	720	12000	**32**	300×300	–	■
IRG300-315/75-4	75	100	650	10833	**28**	300×300	–	■
IRG300-315/55-4	55	75	580	9667	**24**	300×300	–	■
IRG300-400/110-4	110	150	720	12000	**50**	300×300	–	■
IRG300-400/90-4	90	120	563	9383	**38**	300×300	–	■
IRG300-400/75-4	75	100	561	9350	**33**	300×300	–	■
IRG300-500/250-4	250	335	720	12000	**80**	300×300	–	■
IRG300-500/200-4	200	270	675	11250	**70**	300×300	–	■
IRG300-500/160-4	160	215	625	10417	**60**	300×300	–	■
IRG 350	DN 350×350 mm							
IRG350-315/160-4	160	215	1200	20000	**32**	350×350	–	■
IRG350-315/132-4	132	176	1092	18200	**28**	350×350	–	■
IRG350-315/110-4	110	150	994	16567	**25**	350×350	–	■
IRG350-400/250-4	250	335	1200	20000	**50**	350×350	–	■
IRG350-400/200-4	200	270	994	16567	**38.5**	350×350	–	■

MODEL CODE

IRG80-315/11-4

IRG	Pump series	**80**	Discharge size (mm)	**315**	Nominal impeller size (mm)
11	Motor power (kW)	**-4**	4-pole motor (n ≈ 1450 /min)	**Blank**	2-pole motor (n ≈ 2900 /min)