perotac
MADE IN TAIWAN

# 4SP

## Applications
For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation


## Operating conditions
Maximum fluid temperature up to +35℃
Maximum sand content: 0.25%
Minimum well diameter: 4"

## Motor and Pump
Rewindable motor
**Single-phase:** 220 - 240V/50Hz
**Three-phase:** 380 - 415V/50Hz
Equip with start control box or digital auto-control box
Pumps are designed by casing stressed
**NEMA** dimension standards
Curve tolerance according to ISO 9906


## Options on request
Special mechanical seal
Other voltages or frequency 60Hz
Single phase motor with built-in capacitor

## Warranty: 2 years
(according to our general sales conditions)



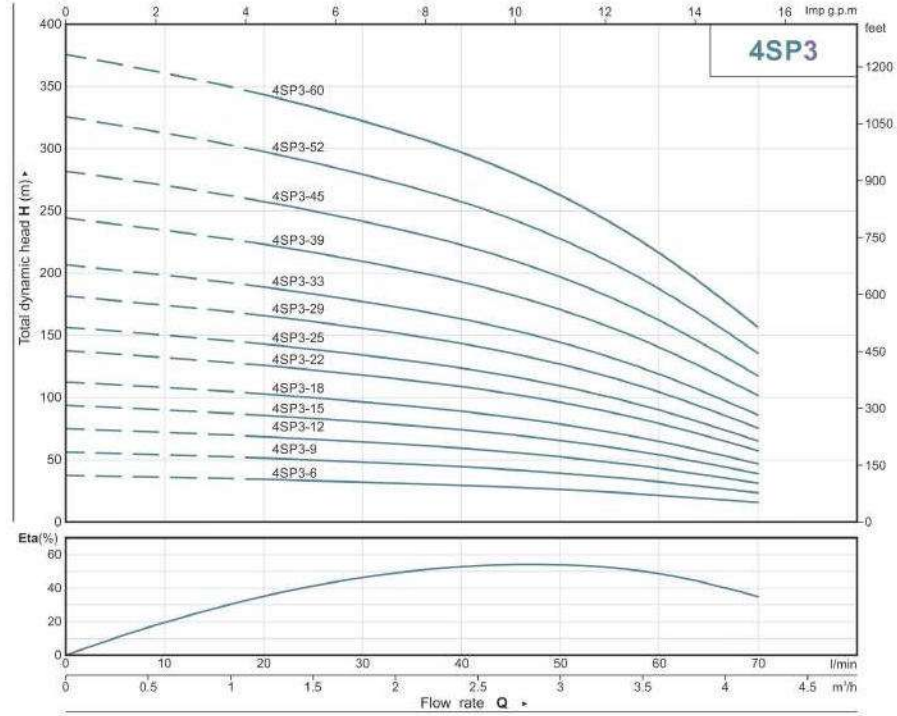



| Components | Material |
|---|---|
| Delivery casing | AISI 304 SS |
| Suction lantern | AISI 304 SS |
| Diffuser | AISI 304 SS |
| Impeller | AISI 304 SS |
| Shaft | AISI 431 SS |
| Shaft coupling | AISI 304 SS |
| Wear ring | Rubber |
| Motor external casing | AISI 304 SS |
| Top chock | Cast-iron ASTM N0.30 |
| Bottom support | Cast-iron ASTM N0.30 |
| Seal | NBR Graphite-SIC/TC |
| Shaft | AISI 304 SS-ASTM 5140 |

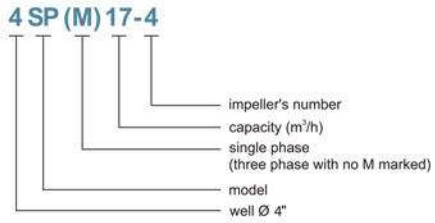



## PERFORMANCE DATA 50Hz

| MODEL | | $P_2$ | | | DELIVERY | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h / l/min | 0 / 0 | 0.6 / 10 | 1.2 / 20 | 1.8 / 30 | 2.4 / 40 | 3.0 / 50 | 3.6 / 60 | 4.2 / 70 |
| 4SPM3-6 | - | 0.37 | 0.5 | | 37 | 36 | 34 | 32 | 29 | 26 | 21 | 15 |
| 4SPM3-9 | 4SP3-9 | 0.55 | 0.75 | | 56 | 54 | 51 | 48 | 44 | 39 | 32 | 23 |
| 4SPM3-12 | 4SP3-12 | 0.75 | 1 | | 74 | 71 | 68 | 64 | 59 | 52 | 43 | 31 |
| 4SPM3-15 | - | 0.92 | 1.25 | | 93 | 89 | 85 | 80 | 73 | 65 | 53 | 39 |
| 4SPM3-18 | 4SP3-18 | 1.1 | 1.5 | | 112 | 107 | 102 | 96 | 88 | 78 | 64 | 46 |
| 4SPM3-22 | - | 1.3 | 1.75 | | 136 | 131 | 125 | 117 | 108 | 95 | 78 | 57 |
| 4SPM3-25 | 4SP3-25 | 1.5 | 2 | H(m) | 155 | 149 | 142 | 133 | 122 | 108 | 89 | 65 |
| 4SPM3-29 | - | 1.8 | 2.5 | | 180 | 173 | 164 | 154 | 142 | 126 | 103 | 75 |
| 4SPM3-33 | 4SP3-33 | 2.2 | 3 | | 205 | 196 | 187 | 175 | 162 | 143 | 118 | 85 |
| 4SPM3-39 | 4SP3-39 | 2.6 | 3.5 | | 242 | 232 | 221 | 207 | 191 | 169 | 139 | 101 |
| 4SPM3-45 | 4SP3-45 | 3 | 4 | | 279 | 268 | 255 | 239 | 220 | 195 | 160 | 116 |
| - | 4SP3-52 | 4 | 5.5 | | 322 | 309 | 295 | 276 | 255 | 225 | 185 | 134 |
| - | 4SP3-60 | 4 | 5.5 | | 372 | 357 | 340 | 319 | 294 | 260 | 214 | 155 |

perotac
MADE IN TAIWAN

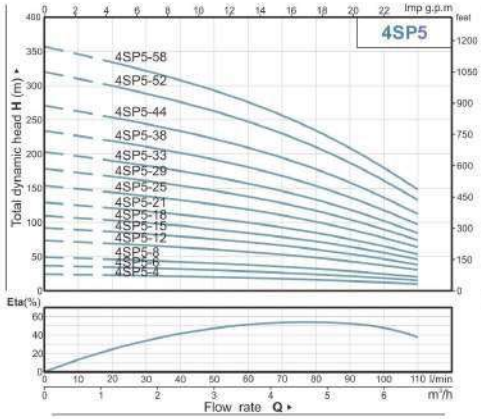

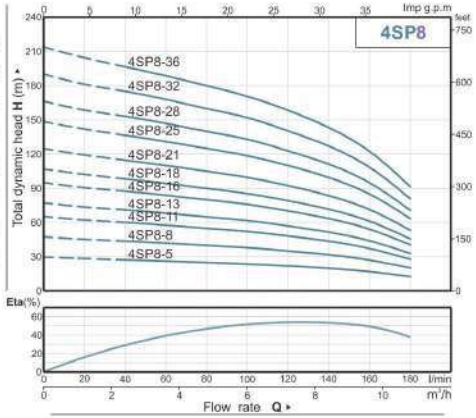



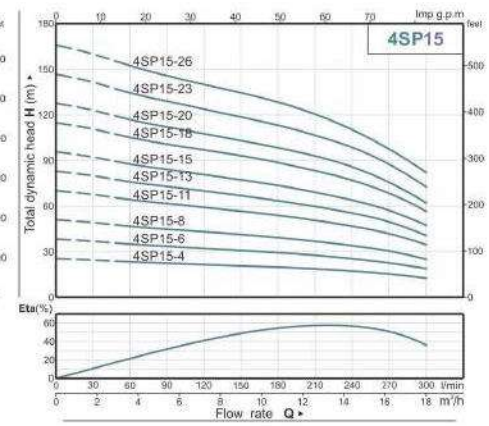

## PERFORMANCE DATA 50Hz

| MODEL | | P2 | | DELIVERY | | | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 0.6 | 1.2 | 1.8 | 2.4 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 | 6.6 |
| | | | | Q l/min | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 |
| 4SPM5-4 | - | 0.37 | 0.5 | H(m) | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 16 | 15 | 12 | 10 |
| 4SPM5-6 | 4SP5-6 | 0.55 | 0.75 | | 37 | 36 | 35 | 33 | 32 | 30 | 28 | 26 | 24 | 22 | 19 | 15 |
| 4SPM5-8 | 4SP5-8 | 0.75 | 1 | | 49 | 48 | 46 | 44 | 42 | 40 | 38 | 35 | 32 | 29 | 25 | 20 |
| 4SPM5-12 | 4SP5-12 | 1.1 | 1.5 | | 74 | 72 | 69 | 66 | 63 | 60 | 57 | 53 | 48 | 44 | 37 | 31 |
| 4SPM5-15 | - | 1.3 | 1.75 | | 92 | 89 | 86 | 83 | 79 | 75 | 71 | 66 | 61 | 55 | 47 | 38 |
| 4SPM5-18 | 4SP5-18 | 1.5 | 2 | | 111 | 107 | 104 | 99 | 95 | 90 | 85 | 79 | 73 | 65 | 57 | 46 |
| 4SPM5-21 | - | 1.8 | 2.5 | | 129 | 125 | 121 | 116 | 111 | 105 | 99 | 92 | 85 | 76 | 66 | 54 |
| 4SPM5-25 | 4SP5-25 | 2.2 | 3 | | 154 | 149 | 144 | 138 | 132 | 125 | 118 | 110 | 101 | 91 | 78 | 64 |
| 4SPM5-29 | 4SP5-29 | 2.6 | 3.5 | | 179 | 173 | 167 | 160 | 153 | 145 | 137 | 128 | 117 | 106 | 90 | 74 |
| 4SPM5-33 | 4SP5-33 | 3 | 4 | | 203 | 197 | 190 | 182 | 174 | 165 | 156 | 145 | 133 | 120 | 103 | 84 |
| - | 4SP5-38 | 4 | 5.5 | | 234 | 226 | 219 | 210 | 201 | 190 | 179 | 167 | 154 | 138 | 119 | 97 |
| - | 4SP5-44 | 4 | 5.5 | | 271 | 262 | 253 | 243 | 232 | 220 | 208 | 194 | 178 | 160 | 137 | 112 |
| - | 4SP5-52 | 5.5 | 7.5 | | 320 | 310 | 300 | 287 | 275 | 260 | 245 | 229 | 210 | 189 | 162 | 133 |
| - | 4SP5-58 | 5.5 | 7.5 | | 357 | 346 | 334 | 320 | 306 | 290 | 274 | 255 | 234 | 211 | 181 | 148 |

## PERFORMANCE DATA 50Hz

| MODEL | | P2 | | DELIVERY | | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 1.2 | 2.4 | 3.6 | 4.8 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 |
| | | | | Q l/min | 0 | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 |
| 4SPM8-5 | 4SP8-5 | 0.75 | 1 | H(m) | 30 | 28 | 27 | 26 | 25 | 24 | 22 | 20 | 17 | 13 |
| 4SPM8-8 | 4SP8-8 | 1.1 | 1.5 | | 48 | 45 | 44 | 42 | 40 | 38 | 35 | 32 | 27 | 20 |
| 4SPM8-11 | 4SP8-11 | 1.5 | 2 | | 66 | 62 | 61 | 58 | 55 | 52 | 48 | 44 | 37 | 28 |
| 4SPM8-13 | - | 1.8 | 2.5 | | 78 | 73 | 72 | 68 | 65 | 62 | 57 | 52 | 44 | 33 |
| 4SPM8-16 | 4SP8-16 | 2.2 | 3 | | 96 | 90 | 88 | 84 | 80 | 76 | 70 | 64 | 54 | 40 |
| 4SPM8-18 | 4SP8-18 | 2.6 | 3.5 | | 107 | 102 | 98 | 94 | 90 | 85 | 79 | 72 | 61 | 46 |
| 4SPM8-21 | 4SP8-21 | 3 | 4 | | 125 | 119 | 115 | 110 | 105 | 100 | 92 | 84 | 71 | 53 |
| - | 4SP8-25 | 4 | 5.5 | | 149 | 142 | 137 | 131 | 125 | 118 | 110 | 99 | 85 | 63 |
| - | 4SP8-28 | 4 | 5.5 | | 168 | 158 | 154 | 147 | 140 | 133 | 123 | 112 | 95 | 70 |
| - | 4SP8-32 | 5.5 | 7.5 | | 192 | 180 | 176 | 168 | 160 | 152 | 140 | 128 | 108 | 80 |
| - | 4SP8-36 | 5.5 | 7.5 | | 214 | 204 | 197 | 189 | 180 | 171 | 158 | 143 | 122 | 91 |

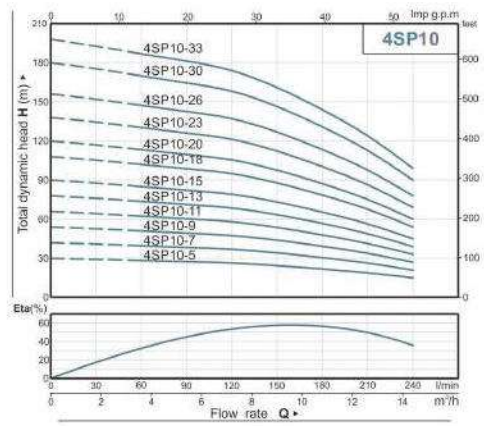



## PERFORMANCE DATA 50Hz

| MODEL | | P2 | | DELIVERY | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 1.8 | 3.6 | 5.4 | 7.2 | 9.0 | 10.8 | 12.6 | 14.4 |
| | | | | Q l/min | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 |
| 4SPM10-5 | 4SP10-5 | 1.1 | 1.5 | H(m) | 30 | 29 | 28 | 27 | 26 | 24 | 22 | 19 | 15 |
| 4SPM10-7 | 4SP10-7 | 1.5 | 2 | | 42 | 41 | 39 | 38 | 37 | 34 | 30 | 26 | 21 |
| 4SPM10-9 | - | 1.8 | 2.5 | | 54 | 52 | 51 | 49 | 47 | 44 | 39 | 34 | 27 |
| 4SPM10-11 | 4SP10-11 | 2.2 | 3 | | 66 | 64 | 62 | 60 | 58 | 54 | 47 | 41 | 33 |
| 4SPM10-13 | 4SP10-13 | 2.6 | 3.5 | | 78 | 76 | 73 | 71 | 69 | 63 | 56 | 49 | 39 |
| 4SPM10-15 | 4SP10-15 | 3 | 4 | | 90 | 87 | 85 | 82 | 79 | 73 | 65 | 56 | 45 |
| - | 4SP10-18 | 4 | 5.5 | | 108 | 105 | 101 | 98 | 95 | 88 | 77 | 68 | 54 |
| - | 4SP10-20 | 4 | 5.5 | | 120 | 116 | 113 | 109 | 105 | 98 | 86 | 75 | 60 |
| - | 4SP10-23 | 5.5 | 7.5 | | 138 | 134 | 130 | 125 | 121 | 112 | 99 | 86 | 69 |
| - | 4SP10-26 | 5.5 | 7.5 | | 156 | 151 | 147 | 142 | 137 | 127 | 112 | 98 | 78 |
| - | 4SP10-30 | 7.5 | 10 | | 180 | 175 | 169 | 164 | 158 | 146 | 129 | 113 | 90 |
| - | 4SP10-33 | 7.5 | 10 | | 198 | 192 | 186 | 180 | 174 | 161 | 142 | 124 | 99 |

## PERFORMANCE DATA 50Hz

| MODEL | | P2 | | DELIVERY | | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 1.8 | 3.6 | 5.4 | 7.2 | 9.0 | 10.8 | 12.6 | 14.4 | 16.2 | 18.0 |
| | | | | Q l/min | 0 | 30 | 60 | 90 | 120 | 150 | 180 | 210 | 240 | 270 | 300 |
| 4SPM14-4 | 4SP14-4 | 1.1 | 1.5 | H(m) | 26 | 25 | 23 | 22 | 22 | 21 | 20 | 18 | 17 | 15 | 12 |
| 4SPM14-6 | 4SP14-6 | 1.5 | 2 | | 38 | 37 | 35 | 34 | 32 | 31 | 30 | 28 | 26 | 23 | 18 |
| 4SPM14-8 | 4SP14-8 | 2.2 | 3 | | 51 | 49 | 47 | 45 | 43 | 41 | 39 | 37 | 34 | 31 | 25 |
| 4SPM14-11 | 4SP14-11 | 3 | 4 | | 70 | 68 | 64 | 62 | 59 | 57 | 54 | 51 | 47 | 42 | 34 |
| - | 4SP14-13 | 4 | 5.5 | | 83 | 80 | 76 | 73 | 70 | 67 | 64 | 60 | 55 | 50 | 40 |
| - | 4SP14-15 | 4 | 5.5 | | 96 | 92 | 88 | 84 | 81 | 77 | 74 | 69 | 64 | 58 | 46 |
| - | 4SP14-18 | 5.5 | 7.5 | | 115 | 111 | 105 | 101 | 97 | 93 | 89 | 83 | 77 | 69 | 55 |
| - | 4SP14-20 | 5.5 | 7.5 | | 128 | 123 | 117 | 112 | 108 | 103 | 98 | 92 | 85 | 77 | 62 |
| - | 4SP14-23 | 7.5 | 10 | | 147 | 142 | 134 | 129 | 124 | 119 | 113 | 106 | 98 | 88 | 71 |
| - | 4SP14-26 | 7.5 | 10 | | 166 | 160 | 152 | 146 | 140 | 134 | 128 | 120 | 111 | 100 | 80 |

## DIMENSION AND WEIGHT




| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 4SPM2-6 | - | 1¼"/1½" | 281 | 344 | - | 625 | - | 2.5 | 7.3 | - | 9.8 | - |
| 4SPM2-9 | - | 1¼"/1½" | 344 | 344 | - | 688 | - | 3.1 | 7.3 | - | 10.4 | - |
| 4SPM2-13 | 4SP2-13 | 1¼"/1½" | 428 | 369 | 344 | 797 | 772 | 4.0 | 8.5 | 7.3 | 12.5 | 11.3 |
| 4SPM2-18 | 4SP2-18 | 1¼"/1½" | 533 | 389 | 369 | 922 | 902 | 5.1 | 9.3 | 8.5 | 14.4 | 13.6 |
| 4SPM2-23 | 4SP2-23 | 1¼"/1½" | 628 | 434 | 399 | 1062 | 1027 | 6.1 | 11.5 | 9.8 | 17.6 | 15.9 |
| 4SPM2-28 | - | 1¼"/1½" | 743 | 464 | - | 1207 | - | 7.2 | 13.1 | - | 20.3 | - |
| 4SPM2-33 | 4SP2-33 | 1¼"/1½" | 848 | 494 | 434 | 1342 | 1282 | 8.1 | 14.5 | 11.5 | 22.6 | 19.6 |
| 4SPM2-40 | - | 1¼"/1½" | 995 | 534 | - | 1529 | - | 9.8 | 16.1 | - | 25.9 | - |
| 4SPM2-48 | 4SP2-48 | 1¼"/1½" | 1163 | 584 | 534 | 1747 | 1697 | 11.5 | 18.4 | 16.1 | 29.9 | 27.6 |
| 4SPM2-55 | 4SP2-55 | 1¼"/1½" | 1310 | 591 | 584 | 1901 | 1894 | 13.0 | 19.8 | 18.4 | 32.8 | 31.4 |
| 4SPM2-65 | 4SP2-65 | 1¼"/1½" | 1520 | 641 | 591 | 2161 | 2111 | 15.2 | 21.5 | 19.8 | 36.7 | 35.0 |


| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 4SPM3-6 | - | 1¼"/1½ | 281 | 344 | - | 625 | - | 2.5 | 7.3 | - | 9.8 | - |
| 4SPM3-9 | 4SP3-9 | 1¼"/1½" | 344 | 369 | 344 | 713 | 688 | 3.2 | 8.5 | 7.3 | 11.7 | 10.5 |
| 4SPM3-12 | 4SP3-12 | 1¼"/1½" | 407 | 389 | 369 | 796 | 776 | 3.8 | 9.3 | 8.5 | 13.1 | 12.3 |
| 4SPM3-15 | - | 1¼"/1½" | 470 | 409 | - | 879 | - | 4.5 | 10.4 | - | 14.9 | - |
| 4SPM3-18 | 4SP3-18 | 1¼"/1½" | 533 | 434 | 399 | 967 | 932 | 5.1 | 11.5 | 9.8 | 16.6 | 14.9 |
| 4SPM3-22 | - | 1¼"/1½" | 617 | 464 | - | 1081 | - | 6.0 | 13.1 | - | 19.1 | - |
| 4SPM3-25 | 4SP3-25 | 1¼"/1½" | 680 | 494 | 434 | 1174 | 1114 | 6.6 | 14.5 | 11.5 | 21.1 | 18.1 |
| 4SPM3-29 | - | 1¼"/1½" | 764 | 534 | - | 1298 | - | 7.5 | 16.1 | - | 23.6 | - |
| 4SPM3-33 | 4SP3-33 | 1¼"/1½" | 848 | 584 | 534 | 1432 | 1382 | 8.4 | 18.4 | 16.1 | 26.8 | 24.5 |
| 4SPM3-39 | 4SP3-39 | 1¼"/1½" | 974 | 591 | 584 | 1565 | 1558 | 9.7 | 19.8 | 18.4 | 29.5 | 28.1 |
| 4SPM3-45 | 4SP3-45 | 1¼"/1½" | 1100 | 641 | 591 | 1741 | 1691 | 11.0 | 21.5 | 19.8 | 32.5 | 30.8 |
| - | 4SP3-52 | 1¼"/1½" | 1247 | - | 695 | - | 1942 | 12.5 | - | 23.0 | - | 35.5 |
| - | 4SP3-60 | 1¼"/1½" | 1415 | - | 695 | - | 2110 | 14.3 | - | 23.0 | - | 37.3 |

| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 4SPM5-4 | - | 1¼"/1½ | 251 | 344 | - | 595 | - | 2.2 | 7.3 | - | 9.5 | - |
| 4SPM5-6 | 4SP5-6 | 1¼"/1½" | 299 | 369 | 344 | 668 | 643 | 2.6 | 8.5 | 7.3 | 11.1 | 9.9 |
| 4SPM5-8 | 4SP5-8 | 1¼"/1½" | 347 | 389 | 369 | 736 | 716 | 3.1 | 9.3 | 8.5 | 12.4 | 11.6 |
| 4SPM5-12 | 4SP5-12 | 1¼"/1½" | 443 | 434 | 399 | 877 | 842 | 4.0 | 11.5 | 9.8 | 15.5 | 13.8 |
| 4SPM5-15 | - | 1¼"/1½" | 515 | 464 | - | 979 | - | 4.7 | 13.1 | - | 17.8 | - |
| 4SPM5-18 | 4SP5-18 | 1¼"/1½" | 587 | 494 | 434 | 1081 | 1021 | 5.3 | 14.5 | 11.5 | 19.8 | 16.8 |
| 4SPM5-21 | - | 1¼"/1½" | 659 | 534 | - | 1193 | - | 6.1 | 16.1 | - | 22.2 | - |
| 4SPM5-25 | 4SP5-25 | 1¼"/1½" | 755 | 584 | 534 | 1339 | 1289 | 7.0 | 18.4 | 16.1 | 25.4 | 23.1 |
| 4SPM5-29 | 4SP5-29 | 1¼"/1½" | 851 | 591 | 584 | 1442 | 1435 | 7.9 | 19.8 | 18.4 | 27.7 | 26.3 |
| 4SPM5-33 | 4SP5-33 | 1¼"/1½" | 947 | 641 | 591 | 1588 | 1538 | 8.8 | 21.5 | 19.8 | 30.3 | 28.6 |
| - | 4SP5-38 | 1¼"/1½" | 1067 | - | 695 | - | 1762 | 10.0 | - | 23.0 | - | 33.0 |
| - | 4SP5-44 | 1¼"/1½" | 1208 | - | 695 | - | 1903 | 11.3 | - | 23.0 | - | 34.3 |
| - | 4SP5-52 | 1¼"/1½" | 1397 | - | 785 | - | 2182 | 13.2 | - | 28.2 | - | 41.4 |
| - | 4SP5-58 | 1¼"/1½" | 1538 | - | 785 | - | 2323 | 14.5 | - | 28.2 | - | 42.7 |

- M(S) is single phase motor, M(T) is three phase motor.
- T(S) is single phase motor, T(T) is three phase motor.

Perotac
MADE IN TAIWAN

## DIMENSION AND WEIGHT




| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 4SPM8-5 | 4SP8-5 | 1½"/2" | 415 | 389 | 369 | 804 | 784 | 4.4 | 9.3 | 8.5 | 13.7 | 12.9 |
| 4SPM8-8 | 4SP8-8 | 1½"/2" | 541 | 434 | 399 | 975 | 940 | 5.4 | 11.5 | 9.8 | 16.9 | 15.2 |
| 4SPM8-11 | 4SP8-11 | 1½"/2" | 667 | 494 | 434 | 1161 | 1101 | 6.4 | 14.5 | 11.5 | 20.9 | 17.9 |
| 4SPM8-13 | - | 1½"/2" | 751 | 534 | - | 1285 | - | 7.1 | 16.1 | - | 23.2 | - |
| 4SPM8-16 | 4SP8-16 | 1½"/2" | 877 | 584 | 534 | 1461 | 1411 | 8.1 | 18.4 | 16.1 | 26.5 | 24.2 |
| 4SPM8-18 | 4SP8-18 | 1½"/2" | 961 | 591 | 584 | 1552 | 1545 | 8.7 | 19.8 | 18.4 | 28.5 | 27.1 |
| 4SPM8-21 | 4SP8-21 | 1½"/2" | 1087 | 641 | 591 | 1728 | 1678 | 9.7 | 21.5 | 19.8 | 31.2 | 29.5 |
| - | 4SP8-25 | 1½"/2" | 1213 | - | 695 | - | 1908 | 10.7 | - | 23.0 | - | 33.7 |
| - | 4SP8-28 | 1½"/2" | 1339 | - | 695 | - | 2034 | 11.8 | - | 23.0 | - | 34.8 |
| - | 4SP8-32 | 1½"/2" | 1549 | - | 785 | - | 2334 | 13.4 | - | 28.2 | - | 41.6 |
| - | 4SP8-36 | 1½"/2" | 1717 | - | 785 | - | 2502 | 14.7 | - | 28.2 | - | 42.9 |

| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 4SPM10-5 | 4SP10-5 | 1½"/2" | 455 | 434 | 399 | 889 | 854 | 4.6 | 11.5 | 9.8 | 16.1 | 14.4 |
| 4SPM10-7 | 4SP10-7 | 1½"/2" | 555 | 494 | 434 | 1049 | 989 | 5.4 | 14.5 | 11.5 | 19.9 | 16.9 |
| 4SPM10-9 | - | 1½"/2" | 655 | 534 | - | 1189 | - | 6.0 | 16.1 | - | 22.1 | - |
| 4SPM10-11 | 4SP10-11 | 1½"/2" | 755 | 584 | 534 | 1339 | 1289 | 6.7 | 18.4 | 16.1 | 25.1 | 22.8 |
| 4SPM10-13 | 4SP10-13 | 1½"/2" | 855 | 591 | 584 | 1446 | 1439 | 7.5 | 19.8 | 18.4 | 27.3 | 25.9 |
| 4SPM10-15 | 4SP10-15 | 1½"/2" | 955 | 641 | 591 | 1596 | 1546 | 8.1 | 21.5 | 19.8 | 29.6 | 27.9 |
| - | 4SP10-18 | 1½"/2" | 1105 | - | 695 | - | 1800 | 9.1 | - | 23.0 | - | 32.1 |
| - | 4SP10-20 | 1½"/2" | 1205 | - | 695 | - | 1900 | 9.9 | - | 23.0 | - | 32.9 |
| - | 4SP10-23 | 1½"/2" | 1355 | - | 785 | - | 2140 | 10.9 | - | 28.2 | - | 39.1 |
| - | 4SP10-26 | 1½"/2" | 1505 | - | 785 | - | 2290 | 12.0 | - | 28.2 | - | 40.2 |
| - | 4SP10-30 | 1½"/2" | 1705 | - | 875 | - | 2580 | 13.3 | - | 34.6 | - | 47.9 |
| - | 4SP10-33 | 1½"/2" | 1855 | - | 875 | - | 2730 | 14.4 | - | 34.6 | - | 49.0 |

| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 4SPM14-4 | 4SP14-4 | 1½"/2" | 497 | 434 | 399 | 931 | 896 | 4.9 | 11.5 | 9.8 | 16.4 | 14.7 |
| 4SPM14-6 | 4SP14-6 | 1½"/2" | 647 | 494 | 434 | 1141 | 1081 | 5.6 | 14.5 | 11.5 | 20.1 | 17.1 |
| 4SPM14-8 | 4SP14-8 | 1½"/2" | 797 | 584 | 534 | 1381 | 1331 | 6.4 | 18.4 | 16.1 | 24.8 | 22.5 |
| 4SPM14-11 | 4SP14-11 | 1½"/2" | 1022 | 641 | 591 | 1663 | 1613 | 7.4 | 21.5 | 19.8 | 28.9 | 27.2 |
| - | 4SP14-13 | 1½"/2" | 1172 | - | 695 | - | 1867 | 8.4 | - | 23.0 | - | 31.4 |
| - | 4SP14-15 | 1½"/2" | 1322 | - | 695 | - | 2017 | 9.1 | - | 23.0 | - | 32.1 |
| - | 4SP14-18 | 1½"/2" | 1547 | - | 785 | - | 2332 | 10.2 | - | 28.2 | - | 38.4 |
| - | 4SP14-20 | 1½"/2" | 1697 | - | 785 | - | 2482 | 10.9 | - | 28.2 | - | 39.1 |
| - | 4SP14-23 | 1½"/2" | 1922 | - | 875 | - | 2797 | 12.0 | - | 34.6 | - | 46.6 |
| - | 4SP14-26 | 1½"/2" | 2147 | - | 875 | - | 3022 | 13.1 | - | 34.6 | - | 47.7 |

- M(S) is single phase motor, M(T) is three phase motor.
- T(S) is single phase motor, T(T) is three phase motor.

perotac
MADE IN TAIWAN

perotac
MADE IN TAIWAN

# 6SP

## Applications
For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation


## Operating conditions
Maximum fluid temperature up to +50℃
Maximum sand content: 0.25%
Minimum well diameter: 6"

## Motor and Pump
Rewindable motor
**Single-phase:** 220 - 240V/50Hz
**Three-phase:** 380 - 415V/50Hz
①Direct start (1 cable)
②Star-delta start (2 cables)
Equip with start control box or digital auto-control box
**NEMA** dimension standards
Curve tolerance according to ISO 9906


## Options on request
Special mechanical seal
Other voltages or frequency 60Hz

## Warranty: 2 years
(according to our general sales conditions)



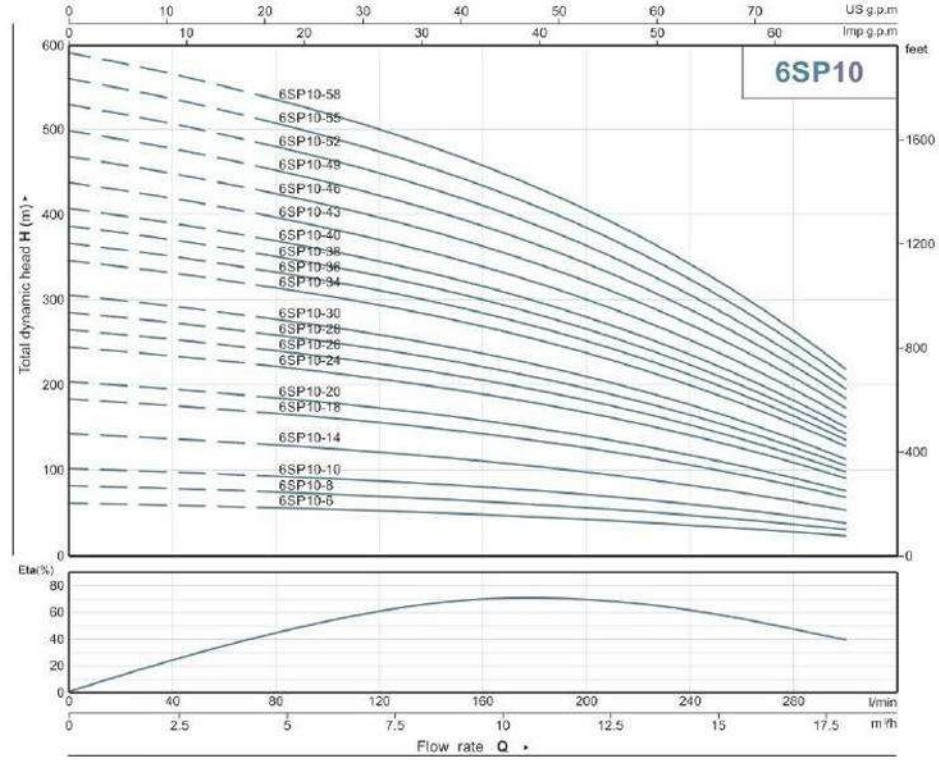



| Components | Material |
|---|---|
| Delivery casing | AISI 304 SS |
| Suction lantern | AISI 304 SS |
| Diffuser | AISI 304 SS |
| Impeller | AISI 304 SS |
| Shaft | AISI 431 SS |
| Shaft coupling | AISI 304 SS |
| Wear ring | Rubber |
| Motor external casing | AISI 304 SS |
| Top chock | Cast-iron ASTM N0.30 |
| Bottom support | Cast-iron ASTM N0.30 |
| Seal | NBR Graphite-SIC/TC |
| Shaft | AISI 304 SS-ASTM 5140 |

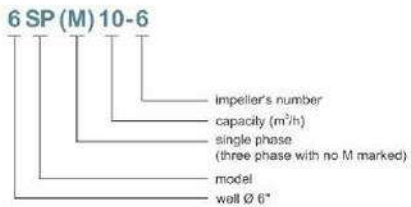



## PERFORMANCE DATA 50Hz

| MODEL | | $P_2$ | | DELIVERY | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h / l/min | 0 / 0 | 2.4 / 40 | 4.8 / 80 | 7.2 / 120 | 9.6 / 160 | 12.0 / 200 | 14.4 / 240 | 16.8 / 280 | 18.0 / 300 |
| 6SPM10-6 | 6SP10-6 | 2.2 | 3 | | 61 | 58 | 55 | 52 | 47 | 42 | 35 | 27 | 23 |
| 6SPM10-8 | 6SP10-8 | 3 | 4 | | 81 | 78 | 74 | 69 | 63 | 56 | 47 | 36 | 30 |
| 6SPM10-10 | 6SP10-10 | 4 | 5.5 | | 102 | 97 | 92 | 86 | 79 | 70 | 59 | 46 | 38 |
| 6SPM10-14 | 6SP10-14 | 5.5 | 7.5 | | 142 | 136 | 129 | 121 | 110 | 98 | 83 | 64 | 53 |
| - | 6SP10-18 | 7.5 | 10 | | 183 | 175 | 166 | 155 | 142 | 126 | 106 | 82 | 68 |
| - | 6SP10-20 | 7.5 | 10 | | 203 | 195 | 184 | 172 | 158 | 140 | 118 | 91 | 75 |
| - | 6SP10-24 | 9.2 | 12.5 | | 244 | 234 | 221 | 207 | 189 | 168 | 142 | 109 | 90 |
| - | 6SP10-26 | 9.2 | 12.5 | | 264 | 253 | 240 | 224 | 205 | 182 | 154 | 118 | 98 |
| - | 6SP10-28 | 11 | 15 | | 285 | 273 | 258 | 241 | 221 | 196 | 166 | 127 | 105 |
| - | 6SP10-30 | 11 | 15 | | 305 | 292 | 277 | 259 | 236 | 209 | 177 | 138 | 113 |
| - | 6SP10-34 | 13 | 17.5 | H(m) | 346 | 331 | 314 | 293 | 268 | 237 | 201 | 155 | 128 |
| - | 6SP10-36 | 13 | 17.5 | | 366 | 351 | 332 | 310 | 284 | 251 | 213 | 164 | 135 |
| - | 6SP10-38 | 15 | 20 | | 387 | 371 | 351 | 328 | 299 | 265 | 225 | 173 | 143 |
| - | 6SP10-40 | 15 | 20 | | 407 | 390 | 369 | 345 | 315 | 279 | 237 | 182 | 150 |
| - | 6SP10-43 | 18.5 | 25 | | 437 | 419 | 397 | 371 | 339 | 300 | 254 | 196 | 162 |
| - | 6SP10-46 | 18.5 | 25 | | 468 | 448 | 424 | 397 | 362 | 321 | 272 | 209 | 173 |
| - | 6SP10-49 | 18.5 | 25 | | 498 | 477 | 452 | 422 | 386 | 342 | 290 | 223 | 184 |
| - | 6SP10-52 | 22 | 30 | | 529 | 507 | 480 | 448 | 410 | 363 | 308 | 237 | 195 |
| - | 6SP10-55 | 22 | 30 | | 559 | 536 | 507 | 474 | 433 | 384 | 325 | 250 | 207 |
| - | 6SP10-58 | 22 | 30 | | 590 | 565 | 535 | 500 | 457 | 405 | 343 | 264 | 218 |

perotac
MADE IN TAIWAN

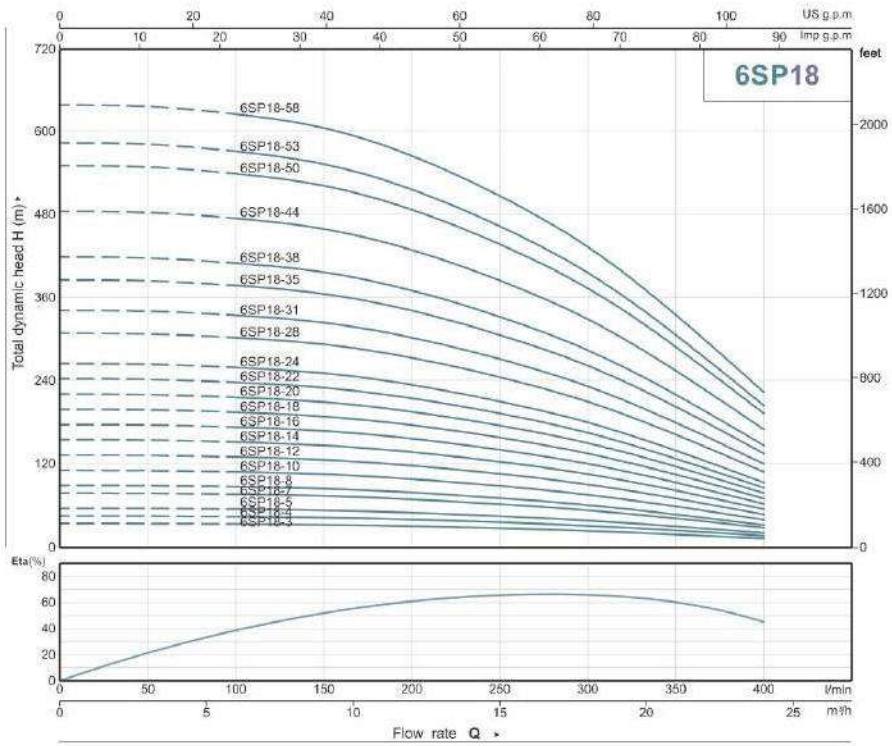

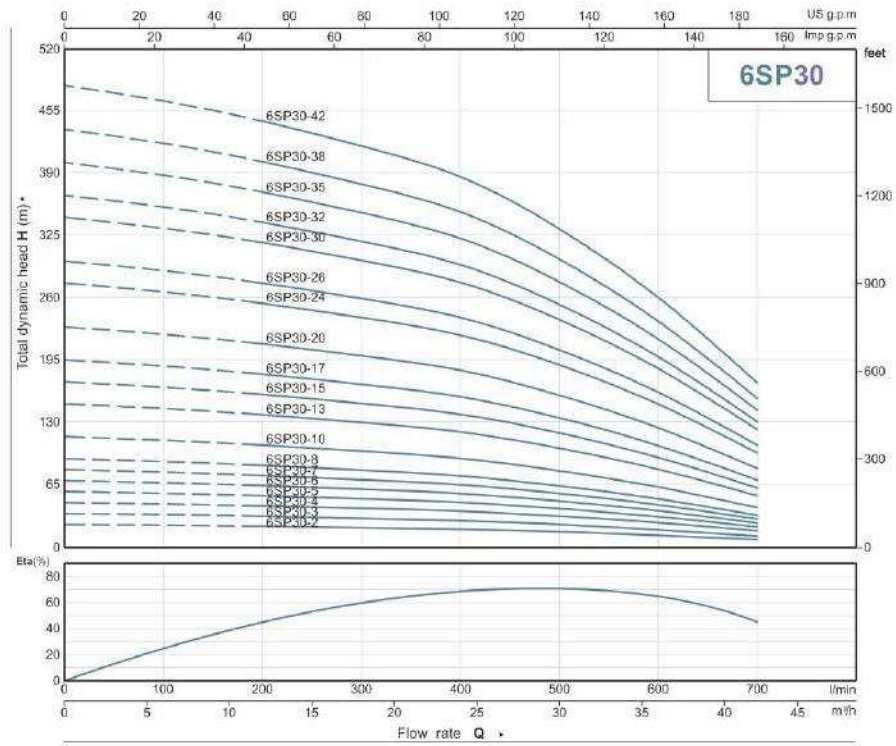

## PERFORMANCE DATA 50Hz


| MODEL | | $P_2$ | | DELIVERY | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q $m^3/h$ l/min | 0 | 3 | 6 | 9 | 12 | 15 | 18 | 21 | 24 |
| | | | | | 0 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
| 6SPM18-3 | 6SP18-3 | 2.2 | 3 | | 33 | 33 | 32 | 31 | 29 | 26 | 22 | 17 | 12 |
| 6SPM18-4 | 6SP18-4 | 2.2 | 3 | | 44 | 44 | 43 | 42 | 39 | 35 | 30 | 23 | 15 |
| 6SPM18-5 | 6SP18-5 | 3 | 4 | | 55 | 55 | 54 | 52 | 49 | 44 | 37 | 29 | 19 |
| 6SPM18-7 | 6SP18-7 | 4 | 5.5 | | 77 | 77 | 75 | 73 | 68 | 61 | 52 | 40 | 27 |
| 6SPM18-8 | 6SP18-8 | 5.5 | 7.5 | | 88 | 88 | 86 | 83 | 78 | 70 | 60 | 46 | 31 |
| 6SPM18-10 | 6SP18-10 | 5.5 | 7.5 | | 110 | 110 | 108 | 104 | 97 | 87 | 75 | 58 | 38 |
| - | 6SP18-12 | 7.5 | 10 | | 132 | 132 | 129 | 125 | 117 | 105 | 90 | 69 | 46 |
| - | 6SP18-14 | 7.5 | 10 | | 154 | 153 | 151 | 146 | 136 | 122 | 105 | 81 | 54 |
| - | 6SP18-16 | 9.2 | 12.5 | | 176 | 175 | 172 | 167 | 156 | 140 | 120 | 92 | 61 |
| - | 6SP18-18 | 11 | 15 | | 198 | 197 | 194 | 188 | 175 | 157 | 134 | 104 | 69 |
| - | 6SP18-20 | 11 | 15 | H(m) | 220 | 219 | 215 | 209 | 195 | 175 | 149 | 115 | 77 |
| - | 6SP18-22 | 13 | 17.5 | | 242 | 241 | 237 | 229 | 214 | 192 | 164 | 127 | 85 |
| - | 6SP18-24 | 13 | 17.5 | | 264 | 263 | 258 | 250 | 233 | 209 | 179 | 138 | 92 |
| - | 6SP18-28 | 15 | 20 | | 308 | 307 | 301 | 292 | 272 | 244 | 209 | 161 | 108 |
| - | 6SP18-31 | 18.5 | 25 | | 341 | 340 | 334 | 323 | 301 | 270 | 232 | 179 | 119 |
| - | 6SP18-35 | 18.5 | 25 | | 385 | 384 | 377 | 365 | 340 | 305 | 261 | 202 | 135 |
| - | 6SP18-38 | 22 | 30 | | 418 | 417 | 409 | 396 | 370 | 332 | 284 | 219 | 146 |
| - | 6SP18-44 | 26 | 35 | | 484 | 482 | 474 | 459 | 428 | 384 | 329 | 254 | 169 |
| - | 6SP18-50 | 26 | 35 | | 550 | 548 | 538 | 522 | 486 | 436 | 374 | 288 | 192 |
| - | 6SP18-53 | 30 | 40 | | 583 | 581 | 571 | 553 | 515 | 462 | 396 | 306 | 204 |
| - | 6SP18-58 | 30 | 40 | | 638 | 636 | 624 | 605 | 564 | 506 | 433 | 334 | 223 |

## PERFORMANCE DATA 50Hz

| MODEL | | $P_2$ | | DELIVERY | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q $m^3/h$ l/min | 0 | 6 | 12 | 18 | 24 | 30 | 36 | 42 |
| | | | | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 |
| 6SPM30-2 | 6SP30-2 | 2.2 | 3 | | 23 | 22 | 21 | 19 | 18 | 15 | 11 | 7 |
| 6SPM30-3 | 6SP30-3 | 3 | 4 | | 34 | 33 | 31 | 29 | 27 | 23 | 17 | 11 |
| 6SPM30-4 | 6SP30-4 | 4 | 5.5 | | 46 | 44 | 42 | 39 | 36 | 31 | 23 | 14 |
| 6SPM30-5 | 6SP30-5 | 5.5 | 7.5 | | 57 | 56 | 53 | 48 | 44 | 38 | 29 | 18 |
| 6SPM30-6 | 6SP30-6 | 5.5 | 7.5 | | 68 | 57 | 63 | 58 | 53 | 46 | 34 | 21 |
| - | 6SP30-7 | 7.5 | 10 | | 80 | 78 | 74 | 68 | 62 | 54 | 40 | 25 |
| - | 6SP30-8 | 7.5 | 10 | | 91 | 89 | 84 | 77 | 71 | 61 | 46 | 28 |
| - | 6SP30-10 | 9.2 | 12.5 | | 114 | 111 | 105 | 96 | 89 | 76 | 57 | 35 |
| - | 6SP30-13 | 11 | 15 | | 148 | 145 | 137 | 125 | 115 | 99 | 75 | 46 |
| - | 6SP30-15 | 13 | 17.5 | H(m) | 171 | 167 | 158 | 145 | 133 | 115 | 86 | 53 |
| - | 6SP30-17 | 15 | 20 | | 194 | 189 | 179 | 164 | 151 | 130 | 97 | 60 |
| - | 6SP30-20 | 18.5 | 25 | | 228 | 222 | 210 | 193 | 178 | 153 | 115 | 71 |
| - | 6SP30-24 | 22 | 30 | | 273 | 267 | 252 | 232 | 213 | 184 | 138 | 85 |
| - | 6SP30-26 | 26 | 35 | | 296 | 289 | 273 | 251 | 231 | 199 | 149 | 92 |
| - | 6SP30-30 | 26 | 35 | | 341 | 334 | 315 | 289 | 266 | 229 | 172 | 106 |
| - | 6SP30-32 | 30 | 40 | | 364 | 356 | 336 | 309 | 284 | 245 | 184 | 113 |
| - | 6SP30-35 | 30 | 40 | | 398 | 389 | 368 | 338 | 311 | 268 | 201 | 124 |
| - | 6SP30-38 | 37 | 50 | | 433 | 422 | 399 | 367 | 338 | 291 | 218 | 134 |
| - | 6SP30-42 | 37 | 50 | | 478 | 467 | 441 | 405 | 373 | 321 | 241 | 148 |

perotac
MADE IN TAIWAN

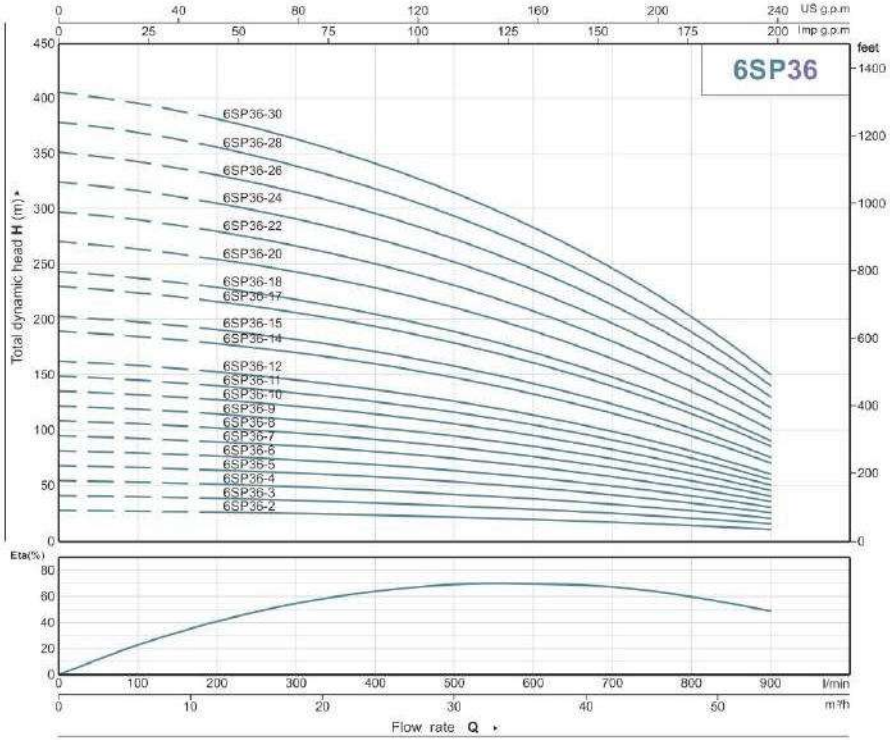

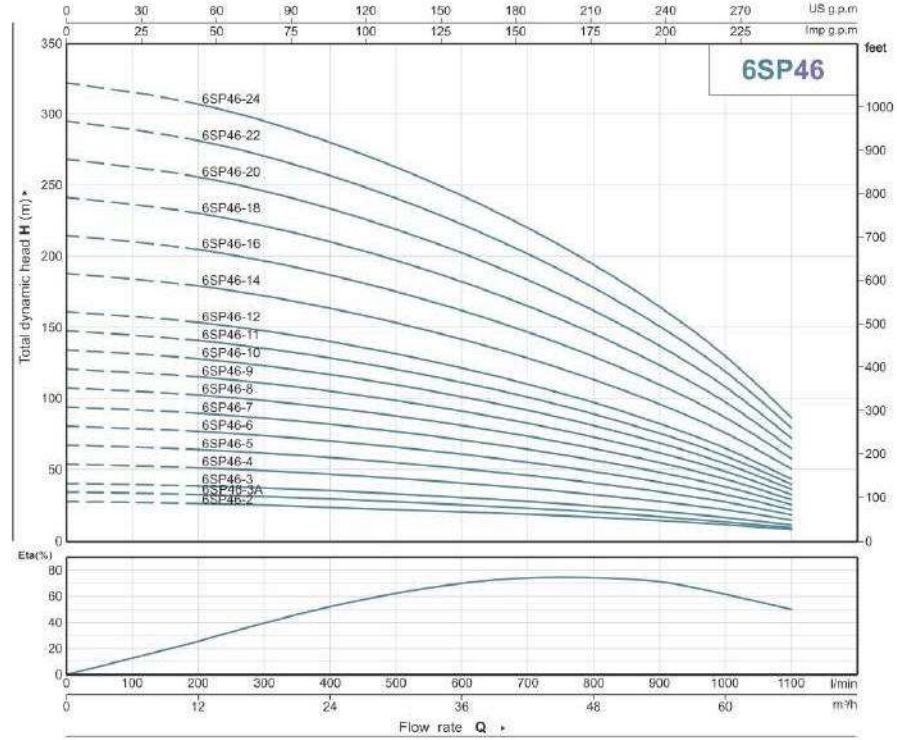

## PERFORMANCE DATA 50Hz


| MODEL | | P2 | | DELIVERY | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 6 | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54 |
| | | | | l/min | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 |
| 6SPM36-2 | 6SP36-2 | 3 | 4 | | 27 | 26 | 25 | 24 | 23 | 21 | 19 | 16 | 14 | 10 |
| 6SPM36-3 | 6SP36-3 | 4 | 5.5 | | 41 | 39 | 38 | 36 | 34 | 31 | 28 | 25 | 20 | 15 |
| 6SPM36-4 | 6SP36-4 | 5.5 | 7.5 | | 54 | 53 | 51 | 48 | 45 | 42 | 38 | 33 | 27 | 20 |
| - | 6SP36-5 | 7.5 | 10 | | 68 | 66 | 63 | 60 | 57 | 52 | 47 | 41 | 34 | 25 |
| - | 6SP36-6 | 7.5 | 10 | | 81 | 79 | 76 | 73 | 68 | 62 | 56 | 49 | 41 | 30 |
| - | 6SP36-7 | 9.2 | 12.5 | | 95 | 92 | 89 | 85 | 80 | 73 | 66 | 58 | 48 | 35 |
| - | 6SP36-8 | 11 | 15 | | 108 | 105 | 102 | 97 | 91 | 83 | 75 | 66 | 54 | 40 |
| - | 6SP36-9 | 11 | 15 | | 122 | 119 | 114 | 109 | 102 | 94 | 85 | 74 | 61 | 45 |
| - | 6SP36-10 | 13 | 17.5 | | 135 | 132 | 127 | 121 | 114 | 104 | 94 | 82 | 68 | 50 |
| - | 6SP36-11 | 15 | 20 | | 149 | 145 | 140 | 133 | 125 | 114 | 103 | 91 | 75 | 55 |
| - | 6SP36-12 | 15 | 20 | H(m) | 162 | 158 | 152 | 145 | 136 | 125 | 113 | 99 | 82 | 60 |
| - | 6SP36-14 | 18.5 | 25 | | 189 | 184 | 178 | 169 | 159 | 146 | 132 | 115 | 95 | 70 |
| - | 6SP36-15 | 18.5 | 25 | | 203 | 198 | 190 | 181 | 170 | 156 | 141 | 123 | 102 | 75 |
| - | 6SP36-17 | 22 | 30 | | 230 | 224 | 216 | 206 | 193 | 177 | 160 | 140 | 116 | 85 |
| - | 6SP36-18 | 22 | 30 | | 243 | 237 | 229 | 218 | 205 | 187 | 169 | 148 | 122 | 90 |
| - | 6SP36-20 | 26 | 35 | | 270 | 263 | 254 | 242 | 227 | 208 | 188 | 165 | 136 | 100 |
| - | 6SP36-22 | 30 | 40 | | 297 | 290 | 279 | 266 | 250 | 229 | 207 | 181 | 150 | 110 |
| - | 6SP36-24 | 30 | 40 | | 324 | 316 | 305 | 290 | 273 | 250 | 226 | 198 | 163 | 120 |
| - | 6SP36-26 | 37 | 50 | | 351 | 342 | 330 | 315 | 296 | 270 | 244 | 214 | 177 | 130 |
| - | 6SP36-26 | 37 | 50 | | 378 | 369 | 356 | 339 | 318 | 291 | 263 | 231 | 190 | 140 |
| - | 6SP36-30 | 37 | 50 | | 405 | 395 | 381 | 363 | 341 | 312 | 282 | 247 | 204 | 150 |

## PERFORMANCE DATA 50Hz

| MODEL | | P2 | | DELIVERY | | | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 6 | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54 | 60 | 66 |
| | | | | l/min | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 |
| 6SPM46-2 | 6SP46-2 | 3 | 4 | | 27 | 26 | 26 | 25 | 23 | 22 | 20 | 18 | 16 | 14 | 11 | 7 |
| 6SPM46-3A | 6SP46-3A | 4 | 5.5 | | 35 | 34 | 32 | 31 | 29 | 26 | 25 | 22 | 20 | 16 | 13 | 9 |
| 6SPM46-3 | 6SP46-3 | 5.5 | 7.5 | | 40 | 39 | 38 | 37 | 35 | 32 | 30 | 27 | 24 | 21 | 16 | 11 |
| - | 6SP46-4 | 7.5 | 10 | | 54 | 52 | 51 | 49 | 46 | 43 | 40 | 36 | 32 | 28 | 22 | 14 |
| - | 6SP46-5 | 7.5 | 10 | | 67 | 65 | 64 | 61 | 58 | 54 | 50 | 45 | 40 | 34 | 27 | 18 |
| - | 6SP46-6 | 9.2 | 12.5 | | 80 | 79 | 77 | 74 | 70 | 65 | 60 | 55 | 49 | 41 | 32 | 22 |
| - | 6SP46-7 | 11 | 15 | | 94 | 92 | 90 | 86 | 81 | 76 | 70 | 64 | 57 | 48 | 38 | 25 |
| - | 6SP46-8 | 13 | 17.5 | | 107 | 105 | 102 | 98 | 93 | 86 | 80 | 73 | 65 | 55 | 43 | 29 |
| - | 6SP46-9 | 15 | 20 | | 121 | 118 | 115 | 111 | 104 | 97 | 90 | 82 | 73 | 62 | 49 | 32 |
| - | 6SP46-10 | 15 | 20 | H(m) | 134 | 131 | 128 | 123 | 116 | 108 | 100 | 91 | 81 | 69 | 54 | 36 |
| - | 6SP46-11 | 18.5 | 25 | | 147 | 144 | 141 | 135 | 128 | 119 | 110 | 100 | 89 | 76 | 59 | 40 |
| - | 6SP46-12 | 18.5 | 25 | | 161 | 157 | 154 | 148 | 139 | 130 | 120 | 109 | 97 | 83 | 65 | 43 |
| - | 6SP46-14 | 22 | 30 | | 188 | 183 | 179 | 172 | 162 | 151 | 140 | 127 | 113 | 97 | 76 | 50 |
| - | 6SP46-16 | 26 | 35 | | 214 | 210 | 205 | 197 | 186 | 173 | 160 | 146 | 130 | 110 | 86 | 58 |
| - | 6SP46-18 | 30 | 40 | | 241 | 236 | 230 | 221 | 209 | 194 | 180 | 164 | 146 | 124 | 97 | 65 |
| - | 6SP46-20 | 30 | 40 | | 268 | 262 | 256 | 246 | 232 | 216 | 200 | 182 | 162 | 138 | 108 | 72 |
| - | 6SP46-22 | 37 | 50 | | 295 | 288 | 281 | 270 | 255 | 237 | 220 | 200 | 178 | 152 | 119 | 79 |
| - | 6SP46-24 | 37 | 50 | | 322 | 314 | 307 | 295 | 278 | 259 | 240 | 218 | 194 | 166 | 130 | 86 |

perotac
MADE IN TAIWAN

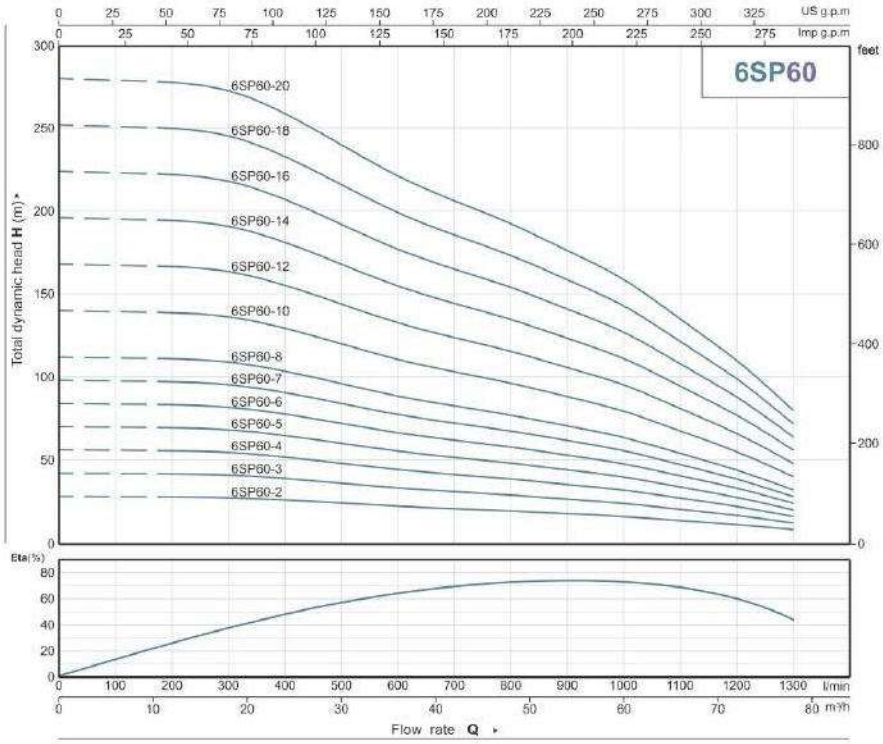


## DIMENSION AND WEIGHT

| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 6SPM10-6 | 6SP10-6 | 3" | 602 | 474 | 454 | 1076 | 1056 | 9.8 | 27.5 | 28.0 | 37.3 | 37.8 |
| 6SPM10-8 | 6SP10-8 | 3" | 712 | 499 | 489 | 1211 | 1201 | 12.3 | 30.5 | 30.1 | 42.8 | 42.4 |
| 6SPM10-10 | 6SP10-10 | 3" | 822 | 544 | 524 | 1366 | 1346 | 14.8 | 35.6 | 33.7 | 50.4 | 48.5 |
| 6SPM10-14 | 6SP10-14 | 3" | 1042 | 604 | 574 | 1646 | 1616 | 19.7 | 43.2 | 39.9 | 62.9 | 59.6 |
| - | 6SP10-18 | 3" | 1262 | - | 639 | - | 1901 | 24.6 | - | 47.6 | - | 72.2 |
| - | 6SP10-20 | 3" | 1372 | - | 639 | - | 2011 | 27.1 | - | 47.6 | - | 74.7 |
| - | 6SP10-24 | 3" | 1592 | - | 699 | - | 2291 | 32.8 | - | 54.8 | - | 87.6 |
| - | 6SP10-26 | 3" | 1702 | - | 699 | - | 2401 | 35.7 | - | 54.8 | - | 90.5 |
| - | 6SP10-28 | 3" | 1812 | - | 764 | - | 2576 | 38.6 | - | 62.6 | - | 101.2 |
| - | 6SP10-30 | 3" | 1922 | - | 764 | - | 2686 | 41.5 | - | 62.6 | - | 104.1 |
| - | 6SP10-34 | 3" | 2142 | - | 824 | - | 2966 | 47.2 | - | 70.1 | - | 117.3 |
| - | 6SP10-36 | 3" | 2252 | - | 824 | - | 3076 | 50.1 | - | 70.1 | - | 120.2 |
| - | 6SP10-38 | 3" | 2362 | - | 884 | - | 3246 | 52.9 | - | 77.2 | - | 130.1 |
| - | 6SP10-40 | 3" | 2472 | - | 884 | - | 3356 | 55.8 | - | 77.2 | - | 133.0 |
| - | 6SP10-43 | 3" | 2637 | - | 909 | - | 3546 | 60.1 | - | 80.3 | - | 140.4 |
| - | 6SP10-46 | 3" | 2802 | - | 909 | - | 3711 | 64.4 | - | 80.3 | - | 144.7 |
| - | 6SP10-49 | 3" | 2967 | - | 909 | - | 3876 | 68.7 | - | 80.3 | - | 149.0 |
| - | 6SP10-52 | 3" | 3132 | - | 984 | - | 4116 | 73.0 | - | 89.5 | - | 162.5 |
| - | 6SP10-55 | 3" | 3297 | - | 984 | - | 4281 | 77.3 | - | 89.5 | - | 166.8 |
| - | 6SP10-58 | 3" | 3462 | - | 984 | - | 4446 | 81.6 | - | 89.5 | - | 171.1 |

| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 6SPM18-3 | 6SP18-3 | 3" | 451 | 474 | 454 | 925 | 905 | 6.1 | 27.5 | 28.0 | 33.6 | 34.1 |
| 6SPM18-4 | 6SP18-4 | 3" | 492 | 474 | 454 | 966 | 946 | 7.3 | 27.5 | 28.0 | 34.8 | 35.3 |
| 6SPM18-5 | 6SP18-5 | 3" | 547 | 499 | 489 | 1046 | 1036 | 8.6 | 30.5 | 30.1 | 39.1 | 38.7 |
| 6SPM18-7 | 6SP18-7 | 3" | 656 | 544 | 524 | 1200 | 1180 | 11.0 | 35.6 | 33.7 | 46.6 | 44.7 |
| 6SPM18-8 | 6SP18-8 | 3" | 710 | 604 | 574 | 1314 | 1284 | 12.3 | 43.2 | 39.9 | 55.5 | 52.2 |
| 6SPM18-10 | 6SP18-10 | 3" | 822 | 604 | 574 | 1426 | 1396 | 14.8 | 43.2 | 39.9 | 58.0 | 54.7 |
| - | 6SP18-12 | 3" | 932 | - | 639 | - | 1571 | 17.6 | - | 47.6 | - | 65.2 |
| - | 6SP18-14 | 3" | 1042 | - | 639 | - | 1681 | 19.7 | - | 47.6 | - | 67.3 |
| - | 6SP18-16 | 3" | 1152 | - | 699 | - | 1851 | 22.2 | - | 54.8 | - | 77.0 |
| - | 6SP18-18 | 3" | 1262 | - | 764 | - | 2026 | 24.6 | - | 62.6 | - | 87.2 |
| - | 6SP18-20 | 3" | 1372 | - | 764 | - | 2136 | 27.1 | - | 62.6 | - | 89.7 |
| - | 6SP18-22 | 3" | 1482 | - | 824 | - | 2306 | 30.0 | - | 70.1 | - | 100.1 |
| - | 6SP18-24 | 3" | 1592 | - | 824 | - | 2416 | 32.8 | - | 70.1 | - | 102.9 |
| - | 6SP18-28 | 3" | 1812 | - | 884 | - | 2696 | 38.6 | - | 77.2 | - | 115.8 |
| - | 6SP18-31 | 3" | 1978 | - | 909 | - | 2887 | 42.9 | - | 80.3 | - | 123.2 |
| - | 6SP18-35 | 3" | 2198 | - | 909 | - | 3107 | 48.6 | - | 80.3 | - | 128.9 |
| - | 6SP18-38 | 3" | 2363 | - | 984 | - | 3347 | 52.9 | - | 89.5 | - | 142.4 |
| - | 6SP18-44 | 3" | 2692 | - | 1059 | - | 3751 | 61.5 | - | 99.2 | - | 160.7 |
| - | 6SP18-50 | 3" | 3022 | - | 1059 | - | 4081 | 70.2 | - | 99.2 | - | 169.4 |
| - | 6SP18-53 | 3" | 3186 | - | 1134 | - | 4320 | 74.5 | - | 107.8 | - | 182.3 |
| - | 6SP18-58 | 3" | 3462 | - | 1134 | - | 4596 | 81.6 | - | 107.8 | - | 189.4 |


- M(S) is single phase motor, M(T) is three phase motor.
- T(S) is single phase motor, T(T) is three phase motor.

## PERFORMANCE DATA 50Hz

| MODEL | | $P_2$ | | DELIVERY | | | | | | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | kW | HP | Q $m^3/h$ l/min | 0 0 | 6 100 | 12 200 | 18 300 | 24 400 | 30 500 | 36 600 | 42 700 | 48 800 | 54 900 | 60 1000 | 66 1100 | 72 1200 | 78 1300 |
| 6SPM60-2 | 6SP60-2 | 4 | 5.5 | H(m) | 28 | 28 | 28 | 27 | 26 | 24 | 22 | 21 | 19 | 18 | 16 | 14 | 11 | 8 |
| 6SPM60-3 | 6SP60-3 | 5.5 | 7.5 | | 42 | 42 | 42 | 41 | 39 | 36 | 33 | 31 | 29 | 26 | 23 | 20 | 16 | 11 |
| - | 6SP60-4 | 7.5 | 10 | | 56 | 56 | 56 | 55 | 52 | 48 | 44 | 41 | 38 | 35 | 31 | 26 | 21 | 15 |
| - | 6SP60-5 | 9.2 | 12.5 | | 70 | 70 | 69 | 68 | 65 | 60 | 55 | 52 | 48 | 44 | 39 | 33 | 26 | 18 |
| - | 6SP60-6 | 11 | 15 | | 84 | 84 | 83 | 82 | 78 | 72 | 66 | 62 | 58 | 53 | 47 | 40 | 31 | 22 |
| - | 6SP60-7 | 13 | 17.5 | | 98 | 98 | 97 | 95 | 91 | 84 | 77 | 72 | 67 | 62 | 55 | 46 | 36 | 25 |
| - | 6SP60-8 | 15 | 20 | | 112 | 112 | 111 | 109 | 104 | 96 | 89 | 83 | 77 | 71 | 63 | 53 | 42 | 29 |
| - | 6SP60-10 | 18.5 | 25 | | 140 | 139 | 139 | 136 | 129 | 120 | 111 | 103 | 96 | 88 | 78 | 66 | 52 | 36 |
| - | 6SP60-12 | 22 | 30 | | 168 | 167 | 167 | 164 | 155 | 144 | 133 | 124 | 116 | 106 | 94 | 80 | 62 | 44 |
| - | 6SP60-14 | 26 | 35 | | 196 | 195 | 194 | 191 | 181 | 168 | 155 | 144 | 135 | 123 | 109 | 93 | 73 | 51 |
| - | 6SP60-16 | 30 | 40 | | 224 | 223 | 222 | 218 | 207 | 192 | 177 | 165 | 154 | 141 | 125 | 106 | 83 | 58 |
| - | 6SP60-18 | 37 | 50 | | 252 | 251 | 250 | 245 | 233 | 216 | 199 | 186 | 173 | 159 | 141 | 119 | 93 | 65 |
| - | 6SP60-20 | 37 | 50 | | 280 | 279 | 278 | 273 | 259 | 240 | 221 | 206 | 193 | 176 | 159 | 135 | 110 | 80 |

perotac
MADE IN TAIWAN

## DIMENSION AND WEIGHT





| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 6SPM30-2 | 6SP30-2 | 3"/4" | 464 | 474 | 454 | 938 | 918 | 7.5 | 27.5 | 28.0 | 35.0 | 35.5 |
| 6SPM30-3 | 6SP30-3 | 3"/4" | 560 | 499 | 489 | 1059 | 1049 | 9.3 | 30.5 | 30.1 | 39.8 | 39.4 |
| 6SPM30-4 | 6SP30-4 | 3"/4" | 656 | 544 | 524 | 1200 | 1180 | 11.1 | 35.6 | 33.7 | 46.7 | 44.8 |
| 6SPM30-5 | 6SP30-5 | 3"/4" | 752 | 604 | 574 | 1356 | 1326 | 12.9 | 43.2 | 39.9 | 56.1 | 52.8 |
| 6SPM30-6 | 6SP30-6 | 3"/4" | 848 | 604 | 574 | 1452 | 1422 | 14.7 | 43.2 | 39.9 | 57.9 | 54.6 |
| - | 6SP30-7 | 3"/4" | 944 | - | 639 | - | 1583 | 16.5 | - | 47.6 | - | 64.1 |
| - | 6SP30-8 | 3"/4" | 1040 | - | 639 | - | 1679 | 18.3 | - | 47.6 | - | 65.9 |
| - | 6SP30-10 | 3"/4" | 1232 | - | 699 | - | 1931 | 22.1 | - | 54.8 | - | 76.9 |
| - | 6SP30-13 | 3"/4" | 1520 | - | 764 | - | 2284 | 28.1 | - | 62.6 | - | 90.7 |
| - | 6SP30-15 | 3"/4" | 1712 | - | 824 | - | 2536 | 32.1 | - | 70.1 | - | 102.2 |
| - | 6SP30-17 | 3"/4" | 1904 | - | 884 | - | 2788 | 36.1 | - | 77.2 | - | 113.3 |
| - | 6SP30-20 | 3"/4" | 2192 | - | 909 | - | 3101 | 42.5 | - | 80.3 | - | 122.8 |
| - | 6SP30-24 | 3"/4" | 2576 | - | 984 | - | 3560 | 51.3 | - | 89.5 | - | 140.8 |
| - | 6SP30-26 | 3"/4" | 2768 | - | 1059 | - | 3827 | 55.9 | - | 99.2 | - | 155.1 |
| - | 6SP30-30 | 3"/4" | 3152 | - | 1059 | - | 4211 | 63.7 | - | 99.2 | - | 162.9 |
| - | 6SP30-32 | 3"/4" | 3344 | - | 1134 | - | 4478 | 67.7 | - | 107.8 | - | 175.5 |
| - | 6SP30-35 | 3"/4" | 3536 | - | 1134 | - | 4670 | 73.7 | - | 107.8 | - | 181.5 |
| - | 6SP30-38 | 3"/4" | 3632 | - | 1208 | - | 4840 | 80.1 | - | 117.3 | - | 197.4 |
| - | 6SP30-42 | 3"/4" | 4016 | - | 1208 | - | 5224 | 86.1 | - | 117.3 | - | 203.4 |

| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 6SPM36-2 | 6SP36-2 | 3"/4" | 464 | 499 | 489 | 963 | 953 | 7.5 | 30.5 | 30.1 | 38.0 | 37.6 |
| 6SPM36-3 | 6SP36-3 | 3"/4" | 560 | 544 | 524 | 1104 | 1084 | 9.3 | 35.6 | 33.7 | 44.9 | 43.0 |
| 6SPM36-4 | 6SP36-4 | 3"/4" | 656 | 604 | 574 | 1260 | 1230 | 11.1 | 43.2 | 39.9 | 54.3 | 51.0 |
| - | 6SP36-5 | 3"/4" | 752 | - | 639 | - | 1391 | 12.9 | - | 47.6 | - | 60.5 |
| - | 6SP36-6 | 3"/4" | 848 | - | 639 | - | 1487 | 14.7 | - | 47.6 | - | 62.3 |
| - | 6SP36-7 | 3"/4" | 944 | - | 699 | - | 1643 | 16.5 | - | 54.8 | - | 71.3 |
| - | 6SP36-8 | 3"/4" | 1040 | - | 764 | - | 1804 | 18.3 | - | 62.6 | - | 80.9 |
| - | 6SP36-9 | 3"/4" | 1136 | - | 764 | - | 1900 | 20.1 | - | 62.6 | - | 82.7 |
| - | 6SP36-10 | 3"/4" | 1232 | - | 824 | - | 2056 | 22.1 | - | 70.1 | - | 92.2 |
| - | 6SP36-11 | 3"/4" | 1328 | - | 884 | - | 2212 | 24.1 | - | 77.2 | - | 101.3 |
| - | 6SP36-12 | 3"/4" | 1424 | - | 884 | - | 2308 | 26.1 | - | 77.2 | - | 103.3 |
| - | 6SP36-14 | 3"/4" | 1616 | - | 909 | - | 2525 | 30.1 | - | 80.3 | - | 110.4 |
| - | 6SP36-15 | 3"/4" | 1712 | - | 909 | - | 2621 | 32.1 | - | 80.3 | - | 112.4 |
| - | 6SP36-17 | 3"/4" | 1904 | - | 984 | - | 2888 | 36.1 | - | 89.5 | - | 125.6 |
| - | 6SP36-18 | 3"/4" | 2000 | - | 984 | - | 2984 | 38.1 | - | 89.5 | - | 127.6 |
| - | 6SP36-20 | 3"/4" | 2192 | - | 1059 | - | 3251 | 42.5 | - | 99.2 | - | 141.7 |
| - | 6SP36-22 | 3"/4" | 2384 | - | 1134 | - | 3518 | 46.9 | - | 107.8 | - | 154.7 |
| - | 6SP36-24 | 3"/4" | 2576 | - | 1134 | - | 3710 | 51.3 | - | 107.8 | - | 159.1 |
| - | 6SP36-26 | 3"/4" | 2768 | - | 1208 | - | 3976 | 55.7 | - | 117.3 | - | 173.0 |
| - | 6SP36-30 | 3"/4" | 3152 | - | 1208 | - | 4360 | 68.9 | - | 117.3 | - | 186.2 |

- M(S) is single phase motor, M(T) is three phase motor.
- T(S) is single phase motor, T(T) is three phase motor.

## DIMENSION AND WEIGHT




| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 6SPM46-2 | 6SP46-2 | 3"/4" | 498 | 499 | 489 | 997 | 987 | 8.6 | 30.5 | 30.1 | 39.1 | 38.7 |
| 6SPM46-3A | 6SP46-3A | 3"/4" | 611 | 544 | 524 | 1155 | 1135 | 10.6 | 35.6 | 33.7 | 46.2 | 44.3 |
| 6SPM46-3 | 6SP46-3 | 3"/4" | 611 | 604 | 574 | 1215 | 1185 | 10.6 | 43.2 | 39.9 | 53.8 | 50.5 |
| - | 6SP46-4 | 3"/4" | 724 | - | 639 | - | 1363 | 12.6 | - | 47.6 | - | 60.2 |
| - | 6SP46-5 | 3"/4" | 837 | - | 639 | - | 1476 | 14.6 | - | 47.6 | - | 62.2 |
| - | 6SP46-6 | 3"/4" | 950 | - | 699 | - | 1649 | 16.6 | - | 54.8 | - | 71.4 |
| - | 6SP46-7 | 3"/4" | 1063 | - | 764 | - | 1767 | 18.6 | - | 62.6 | - | 81.2 |
| - | 6SP46-8 | 3"/4" | 1176 | - | 824 | - | 2000 | 20.8 | - | 70.1 | - | 90.9 |
| - | 6SP46-9 | 3"/4" | 1289 | - | 884 | - | 2173 | 23.0 | - | 77.2 | - | 100.2 |
| - | 6SP46-10 | 3"/4" | 1402 | - | 884 | - | 2286 | 25.2 | - | 77.2 | - | 102.4 |
| - | 6SP46-11 | 3"/4" | 1515 | - | 909 | - | 2424 | 27.4 | - | 80.3 | - | 107.7 |
| - | 6SP46-12 | 3"/4" | 1628 | - | 909 | - | 2537 | 29.6 | - | 80.3 | - | 109.9 |
| - | 6SP46-14 | 3"/4" | 1854 | - | 984 | - | 2838 | 34.0 | - | 89.5 | - | 123.5 |
| - | 6SP46-16 | 3"/4" | 2080 | - | 1059 | - | 3139 | 38.4 | - | 99.2 | - | 137.6 |
| - | 6SP46-18 | 3"/4" | 2306 | - | 1134 | - | 3440 | 40.6 | - | 107.8 | - | 148.4 |
| - | 6SP46-20 | 3"/4" | 2532 | - | 1134 | - | 3666 | 42.8 | - | 107.8 | - | 150.6 |
| - | 6SP46-22 | 3"/4" | 2758 | - | 1208 | - | 3966 | 47.2 | - | 117.3 | - | 164.5 |
| - | 6SP46-24 | 3"/4" | 2984 | - | 1208 | - | 4192 | 51.6 | - | 117.3 | - | 168.9 |

| MODEL | | DN | DIMENSION(mm) | | | | | WEIGHT(kg) | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1~ 220 - 240V | 3~ 380 - 415V | | P | M(S) | M(T) | T(S) | T(T) | P | M(S) | M(T) | T(S) | T(T) |
| 6SPM60-2 | 6SP60-2 | 3"/4" | 498 | 544 | 524 | 1042 | 1022 | 8.6 | 35.6 | 33.7 | 44.2 | 42.3 |
| 6SPM60-3 | 6SP60-3 | 3"/4" | 611 | 604 | 574 | 1215 | 1185 | 10.6 | 43.2 | 39.9 | 53.8 | 50.5 |
| - | 6SP60-4 | 3"/4" | 724 | - | 639 | - | 1363 | 12.6 | - | 47.6 | - | 60.2 |
| - | 6SP60-5 | 3"/4" | 837 | - | 699 | - | 1536 | 14.6 | - | 54.8 | - | 69.4 |
| - | 6SP60-6 | 3"/4" | 950 | - | 764 | - | 1714 | 16.6 | - | 62.6 | - | 79.2 |
| - | 6SP60-7 | 3"/4" | 1063 | - | 824 | - | 1887 | 18.6 | - | 70.1 | - | 88.7 |
| - | 6SP60-8 | 3"/4" | 1176 | - | 884 | - | 2060 | 20.8 | - | 77.2 | - | 98.0 |
| - | 6SP60-10 | 3"/4" | 1420 | - | 909 | - | 2329 | 25.2 | - | 80.3 | - | 105.5 |
| - | 6SP60-12 | 3"/4" | 1628 | - | 984 | - | 2612 | 29.6 | - | 89.5 | - | 119.1 |
| - | 6SP60-14 | 3"/4" | 1854 | - | 1059 | - | 2913 | 34.0 | - | 99.2 | - | 133.2 |
| - | 6SP60-16 | 3"/4" | 2080 | - | 1134 | - | 3214 | 38.4 | - | 107.8 | - | 146.2 |
| - | 6SP60-18 | 3"/4" | 2306 | - | 1208 | - | 3514 | 42.8 | - | 117.3 | - | 160.1 |
| - | 6SP60-20 | 3"/4" | 2532 | - | 1208 | - | 3740 | 45.0 | - | 117.3 | - | 162.3 |

- M(S) is single phase motor, M(T) is three phase motor.
- T(S) is single phase motor, T(T) is three phase motor.

perotac
MADE IN TAIWAN

# 8SP

## Applications
For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

## Operating conditions
Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 8"


## Motor and Pump
Rewindable motor
**Three-phase:** 380 - 415V/50Hz
①Direct start (1 cable)
②Star-delta start (2 cables)
Equip with start control box or digital auto-control box
**NEMA** dimension standards
Curve tolerance according to ISO 9906


## Options on request
Special mechanical seal
Other voltages or frequency 60Hz

## Warranty: 2 years
(according to our general sales conditions)



| Components | Material |
|---|---|
| Delivery casing | ①AISI 304 SS ②AISI 316 SS |
| Suction lantern | ①AISI 304 SS ②AISI 316 SS |
| Diffuser | ①AISI 304 SS ②AISI 316 SS |
| Impeller | ①AISI 304 SS ②AISI 316 SS |
| Shaft | ①AISI 431 SS ②AISI 316 SS |
| Shaft coupling | ①AISI 304 SS ②AISI 316 SS |
| Wear ring | Rubber |
| Motor external casing | AISI 304 SS |
| Top chock | Cast-iron ASTM N0.30 |
| Bottom support | Cast-iron ASTM N0.30 |
| Seal | NBR Graphite-SIC/TC |
| Shaft | AISI 304 SS-ASTM 5140 |




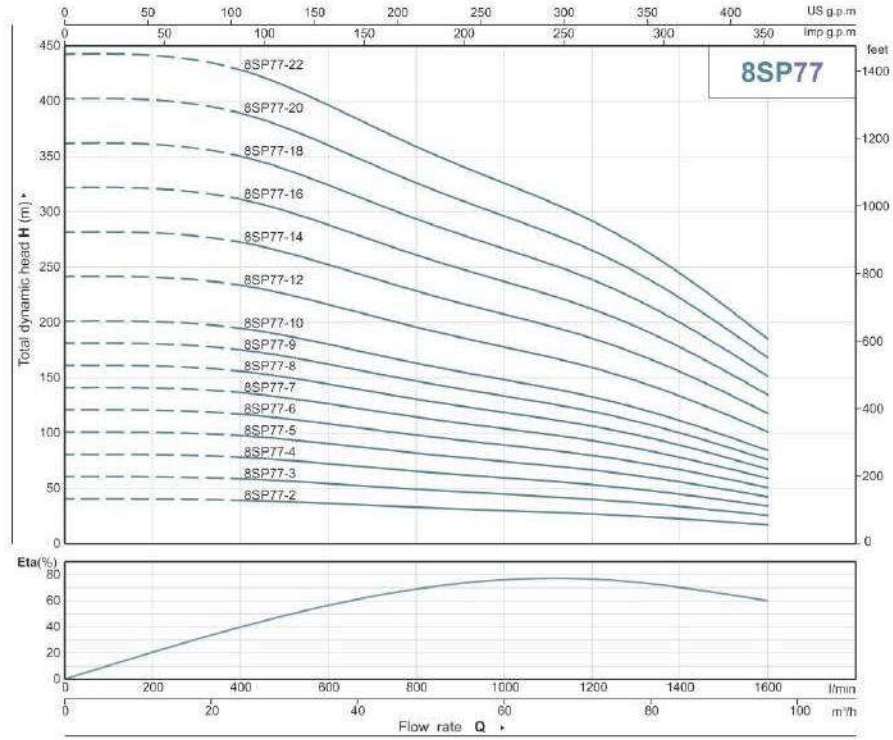




## PERFORMANCE DATA 50Hz

| MODEL | $P_2$ | | DELIVERY | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 12 | 24 | 36 | 48 | 60 | 72 | 84 | 96 |
| | | | l/min | 0 | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 |
| 8SP77-2 | 7.5 | 10 | | 40 | 40 | 39 | 36 | 33 | 30 | 26 | 22 | 17 |
| 8SP77-3 | 11 | 15 | | 60 | 60 | 58 | 54 | 49 | 44 | 40 | 33 | 25 |
| 8SP77-4 | 15 | 20 | | 80 | 80 | 78 | 72 | 65 | 59 | 53 | 44 | 34 |
| 8SP77-5 | 18.5 | 25 | | 101 | 100 | 97 | 90 | 81 | 74 | 66 | 55 | 42 |
| 8SP77-6 | 22 | 30 | | 121 | 120 | 117 | 108 | 98 | 89 | 79 | 67 | 50 |
| 8SP77-7 | 26 | 35 | | 141 | 140 | 136 | 126 | 114 | 104 | 93 | 78 | 59 |
| 8SP77-8 | 30 | 40 | | 161 | 160 | 156 | 144 | 130 | 118 | 106 | 89 | 67 |
| 8SP77-9 | 37 | 50 | H(m) | 181 | 180 | 1750 | 162 | 147 | 133 | 119 | 100 | 76 |
| 8SP77-10 | 37 | 50 | | 201 | 201 | 195 | 180 | 163 | 148 | 133 | 111 | 84 |
| 8SP77-12 | 45 | 60 | | 241 | 241 | 233 | 216 | 196 | 178 | 159 | 133 | 101 |
| 8SP77-14 | 55 | 75 | | 281 | 281 | 272 | 252 | 228 | 207 | 186 | 155 | 118 |
| 8SP77-16 | 63 | 85 | | 322 | 321 | 311 | 288 | 261 | 237 | 212 | 178 | 134 |
| 8SP77-18 | 63 | 85 | | 362 | 361 | 350 | 324 | 293 | 266 | 239 | 200 | 151 |
| 8SP77-20 | 75 | 100 | | 402 | 401 | 389 | 360 | 326 | 296 | 265 | 222 | 168 |
| 8SP77-22 | 75 | 100 | | 442 | 441 | 428 | 396 | 359 | 326 | 291 | 244 | 185 |

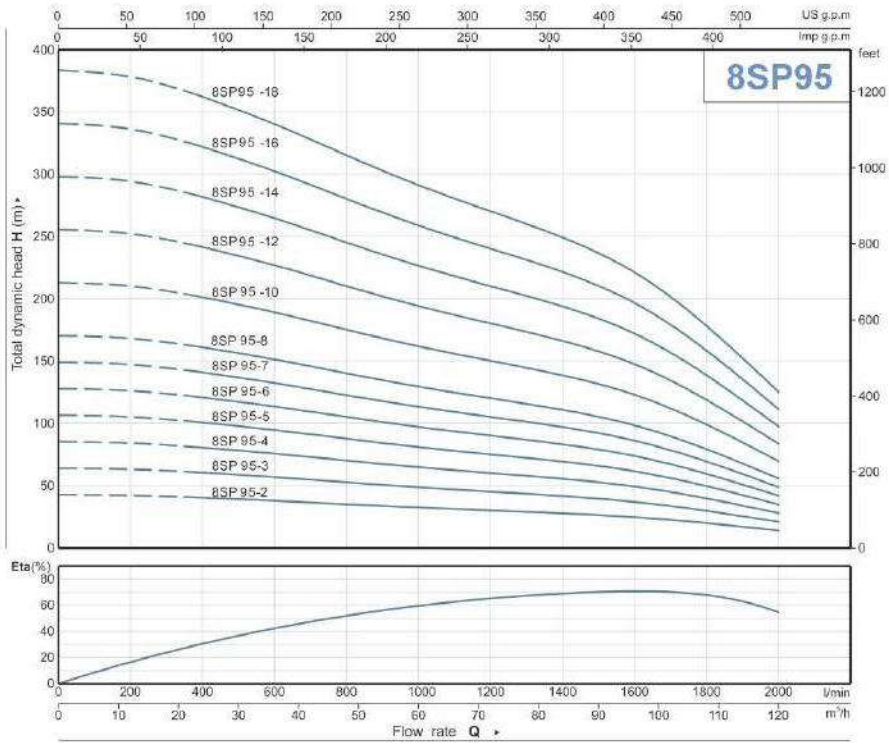perotac
MADE IN TAIWAN




## DIMENSION AND WEIGHT

| MODEL | DN | DIMENSION(mm) | | | | WEIGHT(kg) | | |
|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | | P | M | T | ØD | P | M | T |
| 8SP77-2 | 5" | 637 | 654 | 1291 | 145 | 26.3 | 47.0 | 73.3 |
| 8SP77-3 | 5" | 765 | 754 | 1519 | 145 | 30.0 | 58.3 | 88.3 |
| 8SP77-4 | 5" | 893 | 854 | 1747 | 145 | 33.6 | 69.5 | 103.1 |
| 8SP77-5 | 5" | 1021 | 934 | 1955 | 145 | 37.3 | 80.9 | 118.2 |
| 8SP77-6 | 5" | 1149 | 1014 | 2163 | 145 | 40.9 | 91.6 | 132.5 |
| 8SP77-7 | 5" | 1277 | 1094 | 2371 | 145 | 44.6 | 102.3 | 146.9 |
| 8SP77-8 | 5" | 1405 | 1174 | 2579 | 145 | 48.2 | 113.0 | 161.2 |
| 8SP77-9 | 5" | 1534 | 1274 | 2808 | 145 | 51.9 | 126.4 | 178.3 |
| 8SP77-10 | 5" | 1661 | 1274 | 2935 | 145 | 55.5 | 126.4 | 181.9 |
| 8SP77-12 | 5" | 1917 | 1008 | 2925 | 192 | 62.8 | 159.0 | 221.8 |
| 8SP77-14 | 5" | 2173 | 1078 | 3251 | 192 | 70.1 | 180.0 | 250.1 |
| 8SP77-16 | 5" | 2429 | 1148 | 3577 | 192 | 77.4 | 195.0 | 272.4 |
| 8SP77-18 | 5" | 2685 | 1148 | 3833 | 192 | 84.7 | 195.0 | 279.7 |
| 8SP77-20 | 5" | 2941 | 1348 | 4289 | 192 | 92.0 | 221.0 | 313.0 |
| 8SP77-22 | 5" | 3197 | 1348 | 4545 | 192 | 99.3 | 221.0 | 320.3 |

| MODEL | DN | DIMENSION(mm) | | | | WEIGHT(kg) | | |
|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | | P | M | T | ØD | P | M | T |
| 8SP95-2 | 5" | 637 | 754 | 1391 | 145 | 26.4 | 58.3 | 84.7 |
| 8SP95-3 | 5" | 765 | 854 | 1619 | 145 | 30.1 | 69.5 | 99.6 |
| 8SP95-4 | 5" | 893 | 1014 | 1907 | 145 | 33.8 | 91.6 | 125.4 |
| 8SP95-5 | 5" | 1021 | 1094 | 2115 | 145 | 37.5 | 102.3 | 139.8 |
| 8SP95-6 | 5" | 1149 | 1174 | 2323 | 145 | 41.2 | 113.0 | 154.2 |
| 8SP95-7 | 5" | 1277 | 1274 | 2551 | 145 | 44.9 | 126.4 | 171.3 |
| 8SP95-8 | 5" | 1405 | 1008 | 2413 | 192 | 48.6 | 159.0 | 207.6 |
| 8SP95-10 | 5" | 1661 | 1078 | 2739 | 192 | 56.0 | 180.0 | 236.0 |
| 8SP95-12 | 5" | 1917 | 1078 | 2995 | 192 | 63.4 | 195.0 | 258.4 |
| 8SP95-14 | 5" | 2173 | 1384 | 3557 | 192 | 70.8 | 221.0 | 291.8 |
| 8SP95-16 | 5" | 2429 | 1548 | 3977 | 192 | 78.2 | 245.0 | 323.2 |
| 8SP95-18 | 5" | 2685 | 1548 | 4233 | 192 | 85.6 | 245.0 | 330.6 |

## PERFORMANCE DATA 50Hz

| MODEL | $P_2$ | | DELIVERY | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 12 | 24 | 36 | 48 | 60 | 72 | 84 | 96 | 108 | 120 |
| | | | Q l/min | 0 | 200 | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600 | 1800 | 2000 |
| 8SP95-2 | 11 | 15 | H(m) | 43 | 42 | 40 | 38 | 35 | 32 | 30 | 28 | 25 | 20 | 14 |
| 8SP95-3 | 15 | 20 | | 64 | 63 | 60 | 57 | 52 | 48 | 45 | 41 | 37 | 30 | 21 |
| 8SP95-4 | 22 | 30 | | 85 | 84 | 80 | 76 | 70 | 65 | 60 | 55 | 49 | 40 | 28 |
| 8SP95-5 | 26 | 35 | | 106 | 105 | 101 | 94 | 87 | 81 | 75 | 69 | 61 | 49 | 35 |
| 8SP95-6 | 30 | 40 | | 128 | 126 | 121 | 113 | 105 | 97 | 90 | 83 | 74 | 59 | 42 |
| 8SP95-7 | 37 | 50 | | 149 | 147 | 141 | 132 | 123 | 113 | 105 | 97 | 86 | 69 | 49 |
| 8SP95-8 | 45 | 60 | | 170 | 168 | 161 | 151 | 140 | 130 | 120 | 111 | 98 | 79 | 56 |
| 8SP95-10 | 55 | 75 | | 213 | 210 | 201 | 189 | 175 | 162 | 150 | 138 | 123 | 99 | 69 |
| 8SP95-12 | 63 | 85 | | 255 | 252 | 242 | 227 | 210 | 194 | 180 | 166 | 147 | 119 | 83 |
| 8SP95-14 | 75 | 100 | | 298 | 294 | 282 | 264 | 245 | 227 | 210 | 193 | 172 | 138 | 97 |
| 8SP95-16 | 92 | 125 | | 340 | 336 | 322 | 302 | 280 | 259 | 240 | 221 | 196 | 158 | 111 |
| 8SP95-18 | 92 | 125 | | 383 | 378 | 362 | 340 | 315 | 291 | 270 | 249 | 221 | 178 | 125 |

perotac
MADE IN TAIWAN

perotac
MADE IN TAIWAN

# 10SP

## Applications
For water supply from wells or reservoirs
For domestic use, for civil and industrial applications
For garden use and irrigation

## Operating conditions
Maximum fluid temperature up to +50°C
Maximum sand content: 0.25%
Minimum well diameter: 10"


## Motor and Pump
Rewindable motor
**Three-phase:** 380 - 415V/50Hz
①Direct start (1 cable)
②Star-delta start (2 cables)
Equip with start control box or digital auto-control box
**NEMA** dimension standards
Curve tolerance according to ISO 9906


## Options on request
Special mechanical seal
Other voltages or frequency 60Hz

## Warranty: 2 years
(according to our general sales conditions)



| Components | Material |
|---|---|
| Delivery casing | ①AISI 304 SS ②AISI 316 SS |
| Suction lantern | ①AISI 304 SS ②AISI 316 SS |
| Diffuser | ①AISI 304 SS ②AISI 316 SS |
| Impeller | ①AISI 304 SS ②AISI 316 SS |
| Shaft | ①AISI 431 SS ②AISI 316 SS |
| Shaft coupling | ①AISI 304 SS ②AISI 316 SS |
| Wear ring | Rubber |
| Motor external casing | AISI 304 SS |
| Top chock | Cast-iron ASTM N0.30 |
| Bottom support | Cast-iron ASTM N0.30 |
| Seal | NBR Graphite-SIC/TC |
| Shaft | AISI 304 SS-ASTM 5140 |




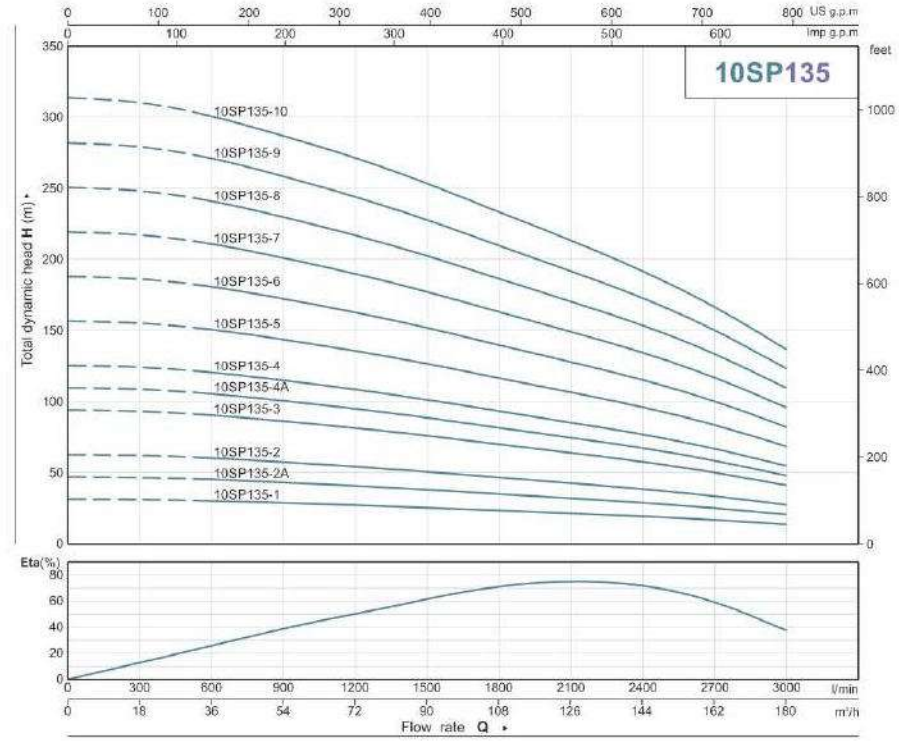




## PERFORMANCE DATA 50Hz

| MODEL | $P_2$ | | DELIVERY | | | | | | | | | | n≈2850 1/min |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 18 | 36 | 54 | 72 | 90 | 108 | 126 | 144 | 162 | 180 |
| | | | l/min | 0 | 300 | 600 | 900 | 1200 | 1500 | 1800 | 2100 | 2400 | 2700 | 3000 |
| 10SP135-1 | 11 | 15 | H(m) | 31 | 31 | 30 | 29 | 27 | 25 | 23 | 21 | 19 | 17 | 13 |
| 10SP135-2A | 18.5 | 25 | | 47 | 47 | 45 | 43 | 41 | 38 | 35 | 32 | 29 | 25 | 20 |
| 10SP135-2 | 22 | 30 | | 63 | 62 | 59 | 57 | 54 | 51 | 47 | 43 | 39 | 33 | 27 |
| 10SP135-3 | 30 | 40 | | 94 | 93 | 89 | 86 | 81 | 76 | 70 | 64 | 58 | 50 | 40 |
| 10SP135-4A | 37 | 50 | | 110 | 109 | 104 | 100 | 95 | 89 | 82 | 75 | 68 | 58 | 47 |
| 10SP135-4 | 45 | 60 | | 125 | 124 | 119 | 115 | 108 | 101 | 93 | 85 | 77 | 67 | 53 |
| 10SP135-5 | 55 | 75 | | 157 | 155 | 149 | 144 | 135 | 127 | 117 | 107 | 96 | 83 | 66 |
| 10SP135-6 | 63 | 85 | | 188 | 186 | 178 | 172 | 162 | 152 | 140 | 128 | 116 | 100 | 80 |
| 10SP135-7 | 75 | 100 | | 219 | 217 | 208 | 201 | 189 | 177 | 163 | 149 | 135 | 117 | 93 |
| 10SP135-8 | 92 | 125 | | 250 | 248 | 238 | 230 | 216 | 202 | 186 | 170 | 154 | 134 | 106 |
| 10SP135-9 | 110 | 150 | | 282 | 279 | 267 | 258 | 243 | 228 | 210 | 192 | 174 | 150 | 120 |
| 10SP135-10 | 110 | 150 | | 313 | 310 | 297 | 287 | 270 | 253 | 233 | 213 | 193 | 167 | 133 |

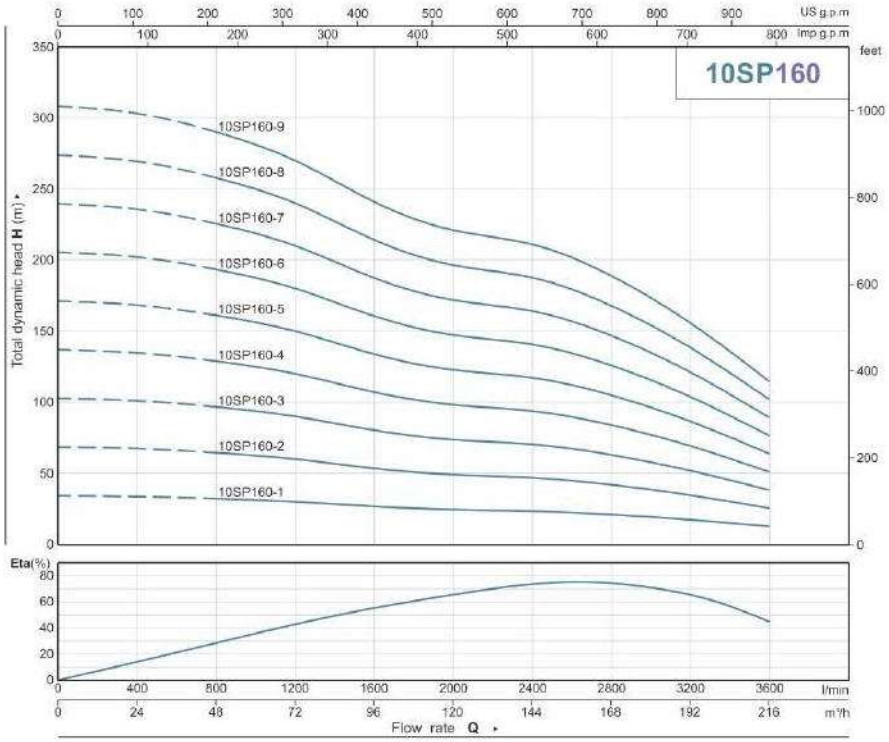perotac
MADE IN TAIWAN




## DIMENSION AND WEIGHT

| MODEL | DN | DIMENSION(mm) | | | | WEIGHT(kg) | | |
|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | | P | M | T | ØD | P | M | T |
| 10SP135-1 | 6" | 610 | 754 | 1364 | 145 | 26.1 | 58.3 | 84.4 |
| 10SP135-2A | 6" | 766 | 934 | 1700 | 145 | 32.8 | 80.5 | 113.3 |
| 10SP135-2 | 6" | 766 | 1014 | 1780 | 145 | 32.8 | 91.6 | 124.4 |
| 10SP135-3 | 6" | 922 | 1174 | 2096 | 145 | 39.6 | 113.0 | 152.6 |
| 10SP135-4A | 6" | 1078 | 1274 | 2352 | 145 | 46.2 | 126.4 | 172.6 |
| 10SP135-4 | 6" | 1078 | 1008 | 2086 | 192 | 46.2 | 159.0 | 205.2 |
| 10SP135-5 | 6" | 1234 | 1078 | 2312 | 192 | 52.8 | 180.0 | 232.8 |
| 10SP135-6 | 6" | 1390 | 1148 | 2538 | 192 | 59.3 | 195.0 | 254.3 |
| 10SP135-7 | 6" | 1546 | 1348 | 2894 | 192 | 65.9 | 221.0 | 286.9 |
| 10SP135-8 | 6" | 1702 | 1500 | 3202 | 192 | 72.4 | 241.0 | 313.4 |
| 10SP135-9 | 6" | 1858 | 1650 | 3508 | 192 | 79.0 | 255.0 | 334.0 |
| 10SP135-10 | 6" | 2014 | 1650 | 3664 | 192 | 85.6 | 255.0 | 340.6 |

| MODEL | DN | DIMENSION(mm) | | | | WEIGHT(kg) | | |
|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | | P | M | T | ØD | P | M | T |
| 10SP160-1 | 6" | 610 | 804 | 1414 | 145 | 26.1 | 63.9 | 90.0 |
| 10SP160-2 | 6" | 766 | 1094 | 1860 | 145 | 32.8 | 102.3 | 135.1 |
| 10SP160-3 | 6" | 922 | 1274 | 2196 | 145 | 41.1 | 126.4 | 167.5 |
| 10SP160-4 | 6" | 1078 | 1078 | 2156 | 192 | 47.7 | 180.0 | 227.7 |
| 10SP160-5 | 6" | 1234 | 1148 | 2382 | 192 | 53.3 | 195.0 | 248.3 |
| 10SP160-6 | 6" | 1390 | 1348 | 2738 | 192 | 59.8 | 221.0 | 280.8 |
| 10SP160-7 | 6" | 1546 | 1500 | 3046 | 192 | 66.8 | 241.0 | 307.8 |
| 10SP160-8 | 6" | 1702 | 1500 | 3202 | 192 | 73.9 | 241.0 | 314.9 |
| 10SP160-9 | 6" | 1858 | 1650 | 3508 | 192 | 77.5 | 255.0 | 332.5 |

## PERFORMANCE DATA 50Hz

| MODEL | $P_2$ | | DELIVERY n≈2850 1/min | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3~ 380 - 415V | kW | HP | Q m³/h | 0 | 24 | 48 | 72 | 96 | 120 | 144 | 168 | 192 | 216 |
| | | | l/min | 0 | 400 | 800 | 1200 | 1600 | 2000 | 2400 | 2800 | 3200 | 3600 |
| 10SP160-1 | 15 | 20 | H(m) | 34 | 34 | 32 | 30 | 27 | 25 | 23 | 21 | 17 | 13 |
| 10SP160-2 | 26 | 35 | | 68 | 67 | 64 | 60 | 54 | 49 | 47 | 42 | 35 | 26 |
| 10SP160-3 | 37 | 50 | | 103 | 101 | 97 | 90 | 80 | 74 | 70 | 63 | 52 | 38 |
| 10SP160-4 | 55 | 75 | | 137 | 135 | 129 | 120 | 107 | 98 | 94 | 84 | 69 | 51 |
| 10SP160-5 | 63 | 85 | | 171 | 168 | 161 | 150 | 134 | 123 | 117 | 105 | 87 | 64 |
| 10SP160-6 | 75 | 100 | | 205 | 202 | 193 | 180 | 161 | 147 | 141 | 126 | 104 | 77 |
| 10SP160-7 | 92 | 125 | | 240 | 236 | 226 | 210 | 187 | 172 | 164 | 147 | 121 | 89 |
| 10SP160-8 | 92 | 125 | | 274 | 269 | 258 | 240 | 214 | 196 | 188 | 168 | 139 | 102 |
| 10SP160-9 | 110 | 150 | | 308 | 303 | 290 | 270 | 241 | 221 | 211 | 189 | 156 | 115 |