AQUARIS

MADE IN ITALY



METERING PUMP

SELECTION BROCHURE


TRUSTWORTHY PUMP
MADE BY AQUARIS

AQUARIS
MADE IN ITALY

MECHANICAL DIAPHRAGM METERING PUMP

DEFINITION

The diaphragm type metering pump uses a diaphragm to replace the piston, realizes reciprocating motion under the action of the driving mechanism, and completes the pump for the suction and discharge processes

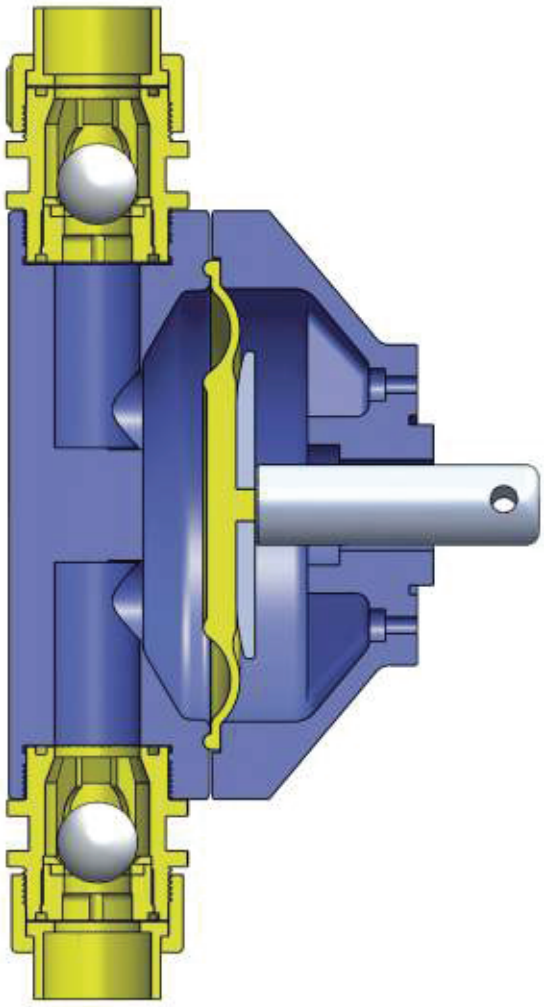

FEATURES

- No moving seal, no leakage.
- It can transport high viscosity media, abrasive pastes and hazardous chemicals.
- Cast aluminum housing, high heat dissipation and light overall weight.
- The diaphragm is pressed into a multi-layer composite structure, the first layer of super tough Teflon acid-resistant film, the second layer of EPDM elastic rubber, the third layer of thickness 3.mm SUS304 supporting iron core, the fourth layer is reinforced with nylon fiber reinforcement, the fifth layer It is fully packaged with EPDM elastic rubber, which can effectively improve the service life of the diaphragm.
- The pressure is generally less than 1.2Mpa.

PUMP HEAD CONGIGURATION ACCORDING TO DIFFERENT APPLICATIONS



PVC



SS304/316



PVDF/PTFE

AQUARIS
MADE IN ITALY

JLM Solenoid Metering Pump



PRODUCT CHARACTERISTICS

- Wear-free solenoid driving with no bearing.
- Adjustment both by stroke length and stroke speed.
- Intelligent LED display the stroke speed in percentage.
- **Power**: 220V 50Hz.
- **Material**: PVC; PVDF; SS304; SS316

PARAMETER TABLE

Model	Flow (LPH)	pressure (BAR)	Flow (GPH)	pressure (PSI)	SPM	Diaphragm (mm)	Power (W)	Connection
JLM1003	10	3	2.64	43.5	80	41	45	5*8mm PE hose
JLM2003	20	3	5.28	43.5	140			
JLM3001	30	1	7.93	14.5	180			
JLM5001	50	1	13.21	14.5	140			

MATERIAL CONSTRUCTION

Material	PVC	PVDF	SS304	SS316
Diaphragm	PTFE	PTFE	PTFE	PTFE
Valve Body	PVC	PVDF	SS304	SS316
Valve Ball	Ceramic	Ceramic	Ceramic	Ceramic
Vavle Seat	PTFE	PTFE	SS304	SS316
O Ring	Viton	Viton	PTFE	PTFE

AQUARIS
MADE IN ITALY

JBB

Mechanical Diaphragm Metering Pump



MAIN PARAMETER

- **Flow range**:15-150LPH@50Hz
- **Pressure range**: 4-10 Bar
- **Power**: 380V/220V @50Hz on standard, others on request, DC12V or 24V is available
- **Material**: PVC; PVDF; SS304; SS316; PTFE

PARAMETER TABLE

Model	50Hz			pressure		Diaphragm (mm)	Power
	Flow (LPH)	Flow (GPH)	SPM	BAR	PSI		
JBB50/10	50	13.21	100	10	145	60	250W
JBB75/10	75	19.81		10	145		
JBB101/10	101	26.68	150	10	145		
JBB155/10	155	40.95		10	145		

CONNECTION

Model	PVC	PVDF/PTFE	SS304/316
JBB50-JBB155	DN15 glue union	RC1/2" F	10*16mm welding union

AQUARIS
MADE IN ITALY

JBB

Mechanical Diaphragm Metering Pump



MAIN PARAMETER

- Flow range: 10-500LPH@50Hz/12-600LPH@60Hz
- Pressure range: 5-12 Bar
- Power: 380V@50Hz on standard, others on request
- Material: PVC; PVDF; SS304; SS316; PTFE

PARAMETER TABLE

Model	50Hz			pressure		Diaphragm (mm)	Power
	Flow (LPH)	Flow (GPH)	SPM	BAR	PSI		
JBB201/7	201	53.1	120	7	101.5	112	0.37KW
JBB321/6	321	84.8		6	87.0		
JBB421/6	421	111.2	140	5	72.5		
JBB521/5	521	137.6		5	72.5		

CONNECTION

Model	PVC	PVDF/PTFE	SS304/316
JBB201-521	DN15 glue union	RC1/2" F	15*22mm welding union